

JRC SCIENCE FOR POLICY REPORT

Code of Conduct on Energy Consumption of Broadband Equipment

Version 8.0

Bertoldi P., Lejeune, A.

2021

This publication is a Technical report by the Joint Research Centre (JRC), the European Commission's science and knowledge service. It aims to provide evidence-based scientific support to the European policymaking process. The scientific output expressed does not imply a policy position of the European Commission. Neither the European Commission nor any person acting on behalf of the Commission is responsible for the use that might be made of this publication. For information on the methodology and quality underlying the data used in this publication for which the source is neither Eurostat nor other Commission services, users should contact the referenced source. The designations employed and the presentation of material on the maps do not imply the expression of any opinion whatsoever on the part of the European Union concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontiers or boundaries.

Contact information

Name: Paolo Bertoldi

Email: Paolo.Bertoldi@ec.europa.eu

Tel.: +39 0332 78 9299

EU Science Hub

<https://ec.europa.eu/jrc>

JRC125961

EUR 30789 EN

PDF

ISBN 978-92-76-40636-5

ISSN 1831-9424

doi:10.2760/10053

Luxembourg: Publications Office of the European Union, 2021

© European Union, 2021



The reuse policy of the European Commission is implemented by the Commission Decision 2011/833/EU of 12 December 2011 on the reuse of Commission documents (OJ L 330, 14.12.2011, p. 39). Except otherwise noted, the reuse of this document is authorised under the Creative Commons Attribution 4.0 International (CC BY 4.0) licence (<https://creativecommons.org/licenses/by/4.0/>). This means that reuse is allowed provided appropriate credit is given and any changes are indicated. For any use or reproduction of photos or other material that is not owned by the EU, permission must be sought directly from the copyright holders.

All content © European Union, 2021

How to cite this report: Bertoldi P., Lejeune, A., *Code of Conduct on Energy Consumption of Broadband Equipment*, EUR 30789 EN, Publications Office of the European Union, Luxembourg, 2021, ISBN 978-92-76-40636-5, doi:10.2760/10053, JRC125961.

Contents

Acknowledgements	1
Abstract	2
1 Introduction	3
2 Equipment covered	4
3 Aim	6
4 Commitment	7
5 Monitoring	8
6 Reporting	9
A. General Principles	10
A.1 For broadband equipment in general	10
A.2 For CPE	10
A.3 For network equipment	10
B. Definition of operation states	11
B.1 Definitions of CPE operation states	11
B.1.1 Off-state	11
B.1.2 Idle-state	11
B.1.3 On-state	13
B.2 Definitions of network operation states	16
C. Power levels: targets and time schedule	17
C.1 CPE	17
C.1.1 Home Gateways	17
C.1.2 USB dongles	24
C.1.3 Home Network Infrastructure Devices	25
C.1.4 Other Home Network Devices	27
C.2 Network equipment	28
C.2.1 Broadband DSL and G.fast network equipment	29
C.2.2 Combined DSL/Narrowband network equipment	34
C.2.3 Optical Line Terminations (OLT) for PON and PtP networks	35
C.2.4 Wireless Broadband network equipment	44
C.2.5 Cable Network Equipment	47
C.2.5.1 CCAP Power Consumption Metrics	48
C.2.5.1.1 CCAP Power Consumption per Service Group	48
C.2.5.1.2 CCAP Power Consumption per Throughput	48
C.2.5.1.3 CCAP Power Consumption – Configuration	48
C.2.5.2 I-CCAP Power Consumption – Allowances	48
C.2.5.3 DCA Power Consumption – Allowances	49
C.2.5.4 Other Cable Network Equipment	50

D. Example Home Gateway Power Consumption Targets	51
D.1 ADSL Home Gateway	51
D.2 VDSL2 Home Gateway	51
D.3 Ethernet router with 4 Fast Ethernet LAN ports	52
D.4 Cable DOCSIS 3.0 CPE	52
D.5 Complex HNID	52
E. Reporting Form	53
F. Test methods	54
F.1 Customer premises equipment	54
F.2 Network equipment	54
G. Evolution of power saving for broadband equipment	55
H. Signing form	56
References	57
List of abbreviations	59
List of figures	61
List of tables	62

Acknowledgements

The authors would like to thank all the members of the Code of Conduct on Energy Consumption of Broadband Equipment Technical Workshop Group.

Abstract

With the strong increase of the internet the energy consumption of data transmission has dramatically increased.

The potential new electrical load represented by this equipment needs to be addressed by EU energy and environmental policies. It is important that the electrical efficiency of broadband equipment is maximised, while not reducing the service provided.

The Code of Conduct sets out the basic principles to be followed by all parties involved in broadband equipment, operating in the European Community, in respect of energy efficient equipment.

The Code of Conduct sets the (maximum) electricity consumption for broadband equipment sold in the EU and manufactured or procured by participating companies.

To help all parties to address the issue of energy efficiency whilst avoiding competitive pressures to raise energy consumption of equipment all service providers, network operators, equipment and component manufacturers are invited to sign this Code of Conduct.

Due to fast technological development the technical specification of the broadband equipment have to be regularly updated. The present document in Version 8.0 valid for 2021 and following years.

1 Introduction

Expectations are that broadband equipment will contribute considerably to the electricity consumption of households in European Community in the near future. Depending on the penetration level, the specifications of the equipment and the requirements of the service provider, a total European consumption of at least 50 TWh per year was estimated for the year 2015 for broadband equipment. With the general principles and actions resulting from the implementation of this Code of Conduct the (maximum) electricity consumption could be slightly reduced or kept constant compared to a business as usual scenario with growing usage and penetration of broadband equipment in the EU.⁽¹⁾

The potential new electrical load represented by this equipment needs to be addressed by EU energy and environmental policies. It is important that the electrical efficiency of broadband equipment is maximised.

To help all parties to address the issue of energy efficiency whilst avoiding competitive pressures to raise energy consumption of equipment all service providers, network operators, equipment and component manufacturers are invited to sign this Code of Conduct.


This Code of Conduct sets out the basic principles to be followed by all parties involved in broadband equipment, operating in the European Community, in respect of energy efficient equipment.

⁽¹⁾ The article by Ward Van Heddeghem, Sofie Lambert, Bart Lannoo, Didier Colle, Mario Pickavet, Piet Demeester, "Trends in worldwide ICT electricity consumption from 2007 to 2012" [25], estimated a global consumption of communication networks in 2012 of 334 TWh. As the EU total electricity consumption is 14.3% of global energy consumption, by adopting this proportion the EU consumption of communication networks in 2012 is estimated to 47 TWh. This is a conservative estimate as the ICT consumption in the EU is representing a large share of total electricity consumption compared to other regions.

2 Equipment covered

This Code of Conduct covers equipment for broadband services both on the customer side as listed in Table 1, and on the network side as listed in Table 2. Note that not all the equipment listed in these tables may yet have a complete set of associated power targets. Any such missing values may be added to future versions of the Code of Conduct, as may any additional technologies that become significant in the Broadband space. Figure 1 below gives examples of home gateway/modem configurations with the boundary between customer premises and network equipment that this Code of Conduct takes into account. This Code of Conduct covers also the equipment for Small Office Home Office (SOHO) applications. Terminals like PCs or TVs are not covered by this Code of Conduct.

Figure 1: Examples of configurations

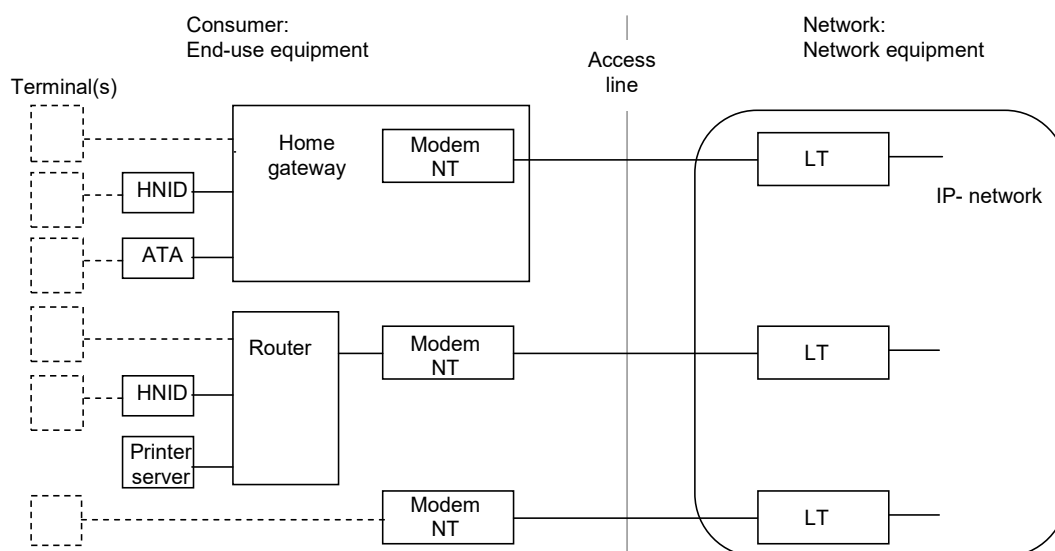

Source: JRC, 2021.

Broadband access equipment is defined by its incorporation of a transmission technology capable of providing more than 2048 kbit/s (ITU-T Rec I.113 [1]) full-rate capacity in at least one direction.

When equipment is in an idle state, it needs to be able to provide services with the same quality as in the on-state, or to be able transition to the on-state to deliver the service without introducing a significant additional delay from the user perspective. This requirement holds regardless of whether the service is initiated from the WAN-side, or the LAN-side.

In this Code of Conduct these categories of equipment will subsequently be referred to as “customer premises equipment” (CPE) and “network equipment” or “broadband equipment” in general.

Table 1: CPE covered

Type of CPE
<p>Home gateways:</p> <ul style="list-style-type: none"> • DSL CPEs (ADSL, ADSL2, ADSL2plus, VDSL2, VDSL2 with G.993.5 Vectoring support) and G.fast • DOCSIS Cable CPEs • Optical CPEs (PON and PtP) • Ethernet router CPEs • Wireless CPEs <p>Simple broadband access devices:</p> <ul style="list-style-type: none"> • Layer 2 ONUs

Home network infrastructure devices:

- Wi-Fi access points including repeaters
- Small hubs and Layer 2 switches
- Powerline adapters
- Alternative LAN technologies (HPNA and MoCA) adapters
- Optical LAN adapter

Other home network devices:

- ATA / VoIP gateway
- VoIP telephone (standalone standard desktop phone)

Source: JRC, 2021

The following equipment is excluded from this version of the Code of Conduct:

- Terminals like PCs and TVs
- Set-top boxes for digital TV services; complex set-top boxes are covered by the Code of Conduct for digital TV Service Systems [2].
- Special purpose devices, like conference phones, video phones, or appliances that contain other main functionalities besides the VoIP function
- Video gateways providing conditional access “termination”, characterized by their capability to receive select and descramble multiple digital video streams to be rerouted on a home network or/and locally decoded to output audio video content. Video gateways equipped with embedded audio/ video decoding and outputting capability are commonly called “headed” video gateways.
- Enterprise CPE products, intended as those equipment that include one or both of the following characteristics and are typically intended to be used in high end applications and users:
 - o Works only with other dedicated proprietary controlling device/server.
 - o Is modular (i.e., allowing non-standardized, proprietary LAN, or WAN interfaces to be inserted in the equipment).

Table 2: Network equipment covered

Type of network equipment covered
<ul style="list-style-type: none">• DSL network equipment (e.g., ADSL, ADSL2, ADSL2plus, VDSL2 and G.fast)• Combined DSL/Narrowband network equipment (e.g., MSAN where POTS interface is combined with DSL BroadBand interface)• Optical Line Terminations (OLT) for PON- and PtP-networks• Wireless Broadband network equipment (e.g., Wi-Fi access points for Hotspot application and Radio Access Network Equipment)• Cable service provider equipment (e.g. CCAP, CMTS and Edge-QAM)

Source: JRC, 2021

3 Aim

To reduce energy consumption of broadband communication equipment without hampering the fast technological developments and the service provided.

4 Commitment

Signatories of this Code of Conduct agree to make all reasonable efforts to:

- a) Abide by the General Principles contained in Annex A.
- b) Achieve the power consumption targets set out in Annex C, for at least 90% (by number ⁽²⁾) of the new-model of broadband equipment in each category (Section C.1.1 to C.1.4 and C.2.1 to C.2.5) covered by this Code of Conduct that are introduced to the market after the indicated dates. For an equipment vendor, "new-model" means equipment that is first placed on the market³ during a given year (note that a simple production optimisation or bug-fix would not necessarily constitute a new-model). For a network operator, "new-model" means equipment of a particular type and specification being procured for the first time in a given year. For the subsequent manufacture or purchase/installation of the same equipment, the Code of Conduct values pertaining to the original year of introduction/purchase apply. To take into account the time network operators need to select new equipment and introduce it into their networks, network operators are entitled to specify the Tier of the Code of Conduct that applied at the date on which the operator formally initiated the procurement process for this equipment (e.g. the date on which the Invitation to Tender for that equipment was issued). If this approach is employed, the operator shall formally notify the supplier of the relevant date and Tier.
- c) Provide end-users with information about power consumption of CPE (CPE-on-state, CPE-idle-state) and about switching off CPE in the user manual, on the Internet, the packaging, and/or at the point of sales.
- d) Co-operate with the European Commission and Member State authorities in an annual review of the scope of the Code of Conduct and the power consumption targets for future years.
- e) Co-operate with the European Commission and Member States in monitoring the effectiveness of this Code of Conduct through the reporting form that is available on the homepage of the EU Standby Initiative ⁽³⁾.
- f) Ensure that procurement specifications for broadband equipment are compliant with this Code of Conduct.

Each version of the Code of Conduct, once published, is a standalone document that supersedes all previous versions, and neither refers to nor depends on such versions. When a new version of the Code of Conduct comes into force, it is assumed that companies/organizations who have already signed the Code of Conduct will remain signatories for the new version. However any company/organization may withdraw its signature from the Code of Conduct with no penalty.

⁽²⁾ For CPE, 'by number' means 'by number of units placed on the market'. For network equipment 'by number' means 'by number of ports placed on the market', so as to allow for equipment with very different numbers of ports.

⁽³⁾ "A product is placed on the market when it is made available for the first time on the Union market." [26]

5 Monitoring

Signatories agree to provide information on the power consumption of their equipment which is covered by the Code of Conduct to the European Commission on annual basis. This should be provided by the end of each March for the previous calendar year. Where a signatory first signs part way through a calendar year, then reporting for that first year should be done from the date of signing, not the beginning of that calendar year.

The anonymous results will be discussed at least once a year by the signatories, the European Commission, Member States, and their representatives in order to:

- a) Evaluate the level of compliance and the effectiveness of this Code of Conduct in achieving its aims.
- b) Evaluate current and future developments that influence energy consumption, (i.e., Integrated Circuit development, etc.) with a view to agreeing actions and/or amendments to the Code of Conduct.
- c) Set targets for future time periods.

6 Reporting

The presentation of the results provided to the Commission will be in the form of the reporting sheet available on the homepage of the EU Standby Initiative [3].

For CPE equipment and Network Equipment separately, the total percentage of all compliant and non-compliant equipment (new and/or old) procured by operators or placed on the market by vendors during the reporting year must be declared. For old equipment, compliance is based on the version of the code of conduct used when the product was first reported.

A. General Principles

Signatories of this Code of Conduct should endeavour to make all reasonable efforts to ensure that:

A.1 For broadband equipment in general

- A.1.1 Broadband equipment should be designed to meet the Code of Conduct power consumption targets. However, power management must not unduly impact the user experience, disturb the network, or contravene the applicable standards.
- A.1.2 Operational and control systems are specified under the assumption that hardware has power management built in, where applicable, i.e., depending on the functionality required of the unit, the hardware will automatically switch to the state with the lowest possible power consumption.
- A.1.3 Signatories will endeavour to assist in the improvement of the existing low-power standards, and the development of new ones as appropriate.

A.2 For CPE

- A.2.1 Any external power supplies used for CPE shall be in accordance with the EU Code of Conduct for External Power Supplies [4]. Power consumption of the external power supply shall be included in the power measurement.
- A.2.2 CPE shall be designed under the assumption that the equipment may be physically disconnected from the mains or switched off manually by the customer, from time to time, at their own discretion.
- A.2.3 Power delivered to other external equipment (e.g., over USB, PoE or to a reversed powered G.fast DPU port) shall not be included in the power consumption assessment of a CPE. This other equipment shall be disconnected for the power consumption measurement, except when this is in contradiction with the operation of the product. However, target values are specified for some specific USB devices, as a reference for USB manufacturers, and to be considered separately from the evaluation of the power budget (and related consumption objectives) of the CPEs they can be connected to.

A.3 For network equipment

- A.3.1 Broadband network equipment should be designed to fulfil the environmental specifications of Class 3.1 for indoor use according to the ETSI Standard EN 300019-1-3 [5], and where appropriate the more extended environmental conditions than Class 3.1 for use at outdoor sites. At remote sites the outdoor cabinet including the Broadband network equipment shall fulfil Class 4.1 according to the ETSI Standard EN 300019-1-4 [6]. Broadband network equipment in the outdoor cabinet should be designed taking in account the characteristics of the cabinet and the outdoor environmental condition; e.g., in case of free cooling cabinet it should be considered that the equipment inside the cabinet could operate (for short time periods) at temperature up to 60° C. If cooling is necessary, it should be preferably cooled with fresh air (fan driven, no refrigeration). The Coefficient of Performance of new site cooling systems, defined as the ratio of the effective required cooling power to the energy needed for the cooling system, should be higher than 10.

B. Definition of operation states

B.1 Definitions of CPE operation states

B.1.1 Off-state

In the **off-state**, the device is not providing any functionality. This state is defined by EC No 1275/2008 [8].

B.1.2 Idle-state

In the **idle-state**, the device is idle, with all the components being in their individual idle states. In this state the device is not processing or transmitting a significant amount of traffic, but is ready to detect activity.

Transitions between the idle-state and on-state must occur without manual reconfiguration of the device, i.e., they must happen automatically.

The definition of idle state for LAN Ethernet Ports of the Home Gateway in Table 3 is different from the definition of the idle state for LAN Ethernet Ports of simple broadband access devices (modems and NTs) in Table 4. For a Home Gateway, no LAN Ethernet port is connected for Idle-state testing. For a simple broadband access device (modems and NTs), one LAN Ethernet port is connected with link up, ready to pass traffic. The difference is due to the fact that the LAN Ethernet port of a modem is required to be operational at all times, while this is not necessarily the case for a Home Gateway.

The idle-state of a home gateway is defined as all the components of the home gateway being in their idle-state as defined in Table 3.

Table 3: Definition of the idle-state for home gateways

Port / component	Idle-state
Central functions (processor and memory: routing, firewall, OAM (e.g., TR-069), user interface)	Not processing user traffic.
WAN interface	<p>Single WAN: Idle (link established and up, the interface is ready to transmit traffic but no user traffic is present).</p> <p>More details on the physical layer configuration of certain interfaces can be found in the on-state definitions (see Table 7).-The idle state configuration can be different than in on-state if this does not require a manual reconfiguration by the end user (e.g., in case of DOCSIS 3.0 and 3.1, the CPE automatically transitions into DOCSIS EM 1x1 mode, assuming a CMTS with DOCSIS EM 1x1 mode is available configuration, in case of ADSL2plus transition to the L2 mode, or in case of G.fast transition to the discontinuous operation interval).</p> <p>In case of dual WAN interface ⁽⁴⁾, for backup or alternative purposes, only one of the two ports will be in the Idle-state described above for a Single WAN, while the second will be disconnected or not active, but able to be manually or automatically activated if needed.</p> <p>In case of dual WAN interface for simultaneous operation, both ports will be in the Idle-state described above for a Single WAN.</p>
LAN Ethernet ports	Ports not connected (or no Ethernet link) but with Ethernet link detection active.
Wi-Fi	Beacon on, but no user traffic transmitted, no client associated.
Alternative LAN technologies (e.g. HPNA, MoCA, Powerline, POF)	MoCA, Powerline, HPNA, or POF capability is activated, but no user traffic transmitted.
FXS	1 FXS port with phone connected (200 Ohm / 5m max cable length), phone on-hook, off hook detection active.

⁽⁴⁾ It should be noted that CPEs may exist with more than two WAN interfaces (e.g. in case of DSL bonding over more than two copper pairs). In the remainder of this document dual WAN interface CPEs are mentioned as the most common category of multi-WAN CPEs.

Port / component	Idle-state
	Remaining FXS ports: no phone or other load connected, but able to detect a connection.
FXO	No active call, incoming call detection enabled.
DECT interface	No active call, incoming call detection enabled.
DECT charging station for DECT handset	DECT handset on cradle, in trickle charge.
Backup battery	Battery is fully charged (trickle charging).
USB	No devices connected, detection of USB devices active.
AI Processor	<p>The AI Processor is a specialized computing unit capable of performing accelerated matrix calculation using dedicated hardware not normally found in a general purpose processor. It analyzes the current network and accelerates the network. It can be used for calculating image recognition and Wi-Fi parameters in future products. For example, when a customer uses Wi-Fi indoors, the AI Processor can determine the location change of a user, calculate Wi-Fi in real time, and adjust Wi-Fi parameters, this feature enables subscribers to access the Internet when their locations change.</p> <p>During idle state testing, the AI Processor is not expected to perform any calculation and remains in its lowest power state most of the time.</p>

Source: JRC, 2021

When activity is detected on a component, the appropriate components transition to the on-state. The transition time should be less than 1 second wherever possible in order to not adversely impact the customer experience. The detection of the Ethernet link may take more than 1 second, but must stay below 3 seconds. This longer transition time can be tolerated in this case because it requires some user interaction to bring up the link (e.g., connect a device or boot a PC).

Note that because only those components required to support the activated service go into their on-state, for a complete device (as opposed to a functional component) there will in fact be a range of power states. At any given time, the CPE should consume the minimum power commensurate with its current level of activity (with the appropriate hysteresis).

Table 4: Definition of the idle-state for simple broadband access devices (modems and NTs)

Port / component	Idle-state
WAN port	Idle (link established and up, the interface is ready to transmit traffic but no user traffic is present).
LAN port	In idle state the LAN port is up and a link is physically and logically established (cable length is 10m as defined in ETSI EN 301575). There is no user traffic transmission on the link only, some insignificant handshake traffic is allowed.

Source: JRC, 2021

Table 5: Definition of the idle-state for Home Network Infrastructure Devices (HNID)

Port / component	Idle-state
Ethernet port	1 port in idle state (see LAN port in Table 4), in case of more than 1 port the remaining ports are disconnected but with Ethernet link detection active.

Source: JRC, 2021

The definitions of the idle-state for all other interfaces and functionality are the same as defined in Table 3.

Table 6: Definition of the idle-state for other home network devices

Port / component	Idle-state
Ethernet port	1 port in idle state (see LAN port in Table 4), in case of more than 1 port the remaining ports are disconnected but with Ethernet link detection active.
VoIP/telephony	No active call, call detection active, inactive display.

Source: JRC, 2021

B.1.3 On-state

The on-state of a home gateway is defined as all the components of the home gateway being in their on-state as defined in Table 7.

For the interfaces carrying user traffic the minimal throughput that needs to be considered is indicated as well in Table 7. As this is the minimal traffic load to be applied to a certain interface, some interfaces can carry more traffic in order to accommodate all minimal traffic loads. This excess traffic should be carried on Ethernet LAN port(s).

Customer-side Ethernet ports present on CPEs are responsible of non-negligible energy consumption. Energy Efficient Ethernet (EEE) as defined in IEEE Std 802.3-2012 SECTION SIX [10] defines power saving mechanisms for wired, customer-side Ethernet ports (see also Annex G). It is then required that copper Ethernet (IEEE 802.3 [10]) interfaces in the CPE comply with EEE and requires that such function be activated. During testing, the measurement equipment connected to EEE capable ports must also support EEE [10].

Transitions between the idle-state and on-state must occur without manual reconfiguration of the device, i.e., they must happen automatically.

Table 7: Definition of the on-state for home gateways

Port / component	On-state
Central functions (processor and memory: routing, firewall, OAM (e.g., TR-069), user interface)	Processing the user traffic present on the WAN and LAN interfaces.
WAN port	Single WAN: Active (link established and passing user traffic) In case of dual WAN interface, for backup or alternative purposes, only one of the two ports will be in the On-state described above for a Single WAN, while the second will be disconnected or not active, but able to be manually or automatically activated in case of need. In case of dual WAN interface for simultaneous operation, both ports shall be in the On-state described above for a Single WAN.
ADSL2plus [18][19]	Line is configured as per TR-100 [12], Table 8-3. Select a valid ADSL2plus specific test profile, configured in rate adaptive mode. Use a test loop of 1250m. The DSL line is active (in showtime) and passing user traffic: 1 Mbit/s downstream, 1 Mbit/s upstream.
VDSL2 (8, 12a, 17a) [17]	Line is configured as per TR-114 [13], Table 9 (Specific Line Settings). Select a valid VDSL2 profile line combination, for the governing profile bandwidth (namely 8, 12, or 17 MHz), configured in rate adaptive mode. Use a test loop of 300 m for the 8 MHz profile and 150 m for each of the 12 and 17 MHz profiles. The DSL line is active (in showtime) and passing user traffic: 10 Mbit/s downstream, 10 Mbit/s upstream.

Port / component	On-state
VDSL2 (35b)	<p>Line is configured as per Broadband Forum Recommendation Amendment 2 to TR-114 Issue 3 [21].</p> <p>VDSL2 Band Profile shall be: Profile 35b, using the Annex Q (998ADE35-M2x-M) PSD mask, configured in rate adaptive mode. Use a test loop of 100m.</p> <p>The DSL line is active (in showtime) and passing user traffic: 10 Mbit/s downstream, 10 Mbit/s upstream</p>
G.fast 106a, 106b, 106c [22]	<p>Line is configured as per the following settings:</p> <ul style="list-style-type: none"> Mds=28, Mus=7, Mf=36. 106a, 106b or 106c MHz profile, operating in the 2MHz – 106MHz frequency band test loop of 50m. <p>The line is active (in showtime) and passing user traffic: 10 Mbit/s downstream, 10 Mbit/s upstream.</p>
G.fast 212a, 212c	<p>Line is configured as per the following settings:</p> <ul style="list-style-type: none"> Mds=28, Mus=7, Mf=36. 212a or 212c MHz profile, operating in the 2MHz – 212MHz frequency band test loop of 50m. <p>The line is active (in showtime) and passing user traffic: 10 Mbit/s downstream, 10 Mbit/s upstream.</p>
Fast Ethernet WAN	<p>Link established at 100 Mbit/s and passing user traffic: concurrent 1 Mbit/s downstream and 1 Mbit/s upstream sent in bursts of 25 back-to-back 500 bytes Ethernet Frames (CRC included). These rate, size and traffic shape are selected to ensure that the Ethernet Interface can activate EEE Low-Power Idle mode during testing (i.e., the interface will return to idle mode between each burst).</p>
Gigabit Ethernet WAN	<p>Link established at 1000 Mbit/s and passing user traffic: concurrent 10 Mbit/s downstream and 10 Mbit/s upstream sent in bursts of 250 back-to-back 500 bytes Ethernet Frames (CRC included). These rate, size and traffic shape are selected to ensure that the Ethernet Interface can activate EEE Low-Power Idle mode during testing (i.e., the interface will return to idle mode between each burst).</p>
Fibre PtP Fast Ethernet WAN	<p>Link established at 100 Mbit/s and passing user traffic: 10 Mbit/s downstream, 10 Mbit/s upstream.</p>
Fibre PtP Gigabit Ethernet WAN	<p>Link established at 1000 Mbit/s and passing user traffic: 10 Mbit/s downstream, 10 Mbit/s upstream.</p>
PON (all types such as GPON, EPON, XG-PON1, etc.)	<p>Passing user traffic: 10 Mbit/s downstream, 10 Mbit/s upstream.</p>
DOCSIS 3.0	<p>4 downstream channels with a modulation type of 256 QAM. 4 upstream channels with a modulation type of 64 QAM, a symbol rate of 5,12 Ms/s, and a transmit level of 45 dBmV per channel. Modem is passing user traffic: 10 Mbit/s downstream, 10 Mbit/s upstream.</p> <p>The Basic configuration represents a modem that supports 4 downstream and 4 upstream channels.</p> <p>An additional power allowance is provided for each additional 4 downstream channels supported by the modem.</p>

Port / component	On-state
DOCSIS 3.1	<p>Note: Requires a high-split plant configuration and CM using a diplexer with a 204MHz cutoff.</p> <p>Downstream: 2 OFDM downstream channels: 4K FFT, 190MHz BW, 4096QAM, RxPower 0dBmV, CF 600/800MHz 24 SC-QAM downstream channels: 8MHz BW, 256QAM, RxPower 0dBmV, CF 300-438MHz</p> <p>Upstream: 2 OFDMA upstream channels: 2K FFT, 48 MHz BW, 1024QAM, TxPower 45dBmV, CF 100/150MHz 8 SC-QAM upstream channels: 6.4MHz, 64QAM, TxPower 45dBmV, CF 8.2-53MHz</p> <p>Modem is passing user traffic: 10 Mbit/s downstream, 10 Mbit/s upstream.</p>
4G	Passing user traffic: 1 Mbit/s downstream, 200 kbit/s upstream.
LAN Fast Ethernet ports	All ports active, link established at 100 Mbit/s, cable length is 10m as defined in ETSI EN 301575 and passing user traffic: concurrent 1 Mbit/s downstream and 1 Mbit/s upstream per port sent in bursts of 25 back-to-back 500 bytes Ethernet Frames (CRC included). These rate, size and traffic shape are selected to ensure that the Ethernet Interface can activate IEEE Low-Power Idle mode during testing (i.e., the interface will return to idle mode between each burst).
LAN Gigabit Ethernet ports (1G through 10G)	All ports active, link established at 1000 Mbit/s, cable length is 10m as defined in ETSI EN 301575 and passing user traffic: concurrent 10 Mbit/s downstream and 10 Mbit/s upstream per port sent in bursts of 250 back-to-back 500 bytes Ethernet Frames (CRC included). These rate, size and traffic shape are selected to ensure that the Ethernet Interface can activate IEEE Low-Power Idle mode during testing (i.e., the interface will return to idle mode between each burst).
Wi-Fi 802.11g or 11a	Beacon on, 1 Wi-Fi client associated and 1-5m away from AP in the same room, avoid interference in the same band, with user traffic: concurrent 1 Mbit/s downstream and 1 Mbit/s upstream.
Wi-Fi 802.11n, 11ac or 11ax	Beacon on, 1 Wi-Fi client associated and 1-5m away from AP in the same room, avoid interference in the same band, with user traffic: concurrent 10 Mbit/s downstream and 10 Mbit/s upstream.
Alternative LAN technologies (e.g., HPNA, MoCA, Powerline, POF)	MoCA, Powerline, HPNA, or POF capability is activated, with user traffic: concurrent 10 Mbit/s downstream and 10 Mbit/s upstream per interface.
FXS	<p>1 phone connected (200 Ohm / loop current of 20 mA / 5m max cable length), off hook, 1 active call.</p> <p>Remaining FXS ports: no phone or other load connected, but able to detect a connection (for those FXS ports, the idle targets apply).</p>
FXO	1 active call.
DECT interface	1 active call.
DECT charging station for DECT handset	DECT handset not on cradle, no charging.
Backup battery	Battery is fully charged (trickle charging).
USB	No USB device connected, detection of USB devices active.

Port / component	On-state
Low speed power line	Active
Bluetooth	Active, with traffic: 10 kbit/s.
Zigbee	Active, with traffic: 10 kbit/s.
Narrowband-IoT [27]	Active
AI Processor	During On state testing, the AI processor remains idle

Source: JRC, 2021

Table 8: Definition of the on-state for simple broadband access devices (modems and NTs)

Port / component	On-state
WAN port	Active (link established and passing user traffic with the traffic load defined in Table 7 for a given WAN interface type).
LAN port	Active (link established and passing the same amount of user traffic as defined for the WAN port).

Source: JRC, 2021

For the on-state of Home Network Infrastructure Devices (HNID) the same definitions as listed in Table 7 apply.

Table 9: Definition of the on-state for other home networking devices

Port / component	On-state
Ethernet port	Port active (user traffic transmission to support the functionality of the device as described in the rows below, cable length is 10m as defined in ETSI EN 301575).
VoIP/telephony	1 active call.
Print server	Print job active.

Source: JRC, 2021

B.2 Definitions of network operation states

For Broadband-Network-technologies the following states are differentiated:

- Network (e.g., DSL)-stand-by state: This state has the largest power reduction capability and there is no transmission of data possible. It is essential for this state that the device has the capability to respond to an activation request, leading to a direct state change. E.g., a transition to the network-full-load state may happen if data has to be transmitted from either side.
- Network (e.g., DSL)-low-load state: This state allows a limited power reduction capability and a limited data transmission is allowed. It is entered automatically from the network-full-load state after the data transmission during a certain time is lower than a predefined limit. If more than the limited data has to be transmitted from either side, the network-full-load state is entered automatically. The network-low-load state may comprise multiple sub-states with history dependent state-transition rules.
- Network (e.g., DSL)-full-load state: This is the state in which a maximal allowed data transmission is possible. The maximum is defined by the physical properties of the line and the settings of the operator.
- For the wireless network equipment also the following states are defined:
 - o Busy hour-load-state
 - o Medium-load-state
 - o Low-load-state

C. Power levels: targets and time schedule

C.1 CPE

CPEs covered by this Code of Conduct (home gateways, home network infrastructure devices and other home network devices) should meet the following maximum power consumption targets in the on-state and in the idle-state as defined in section B.1. In the off-state, these CPEs must meet the requirements of the Code of Conduct for External Power Supplies [4].

The CPEs should apply all possible energy saving actions, minimizing the overall power consumption whenever possible (e.g., when all or some of its functions are not operating).

The power levels defined in this document for all states are mean values based on sufficiently long measurement periods (at least 5 minutes), during which the equipment remains continuously in that same state (measurements should only start when the equipment is stable in this state for at least 60 seconds). Power is measured at the 230V AC input.

C.1.1 Home Gateways

The home gateway ⁽⁵⁾ is composed of several components, namely a processor plus memory, a WAN interface and several LAN interfaces. Depending on the purpose of a given home gateway, different components may be included. The power consumption targets for each type of home gateway are calculated by summing the values of its individual components. The home gateway as a whole has to meet the summed targets for its various modes of operation and activity. Component power consumption values are used to compute the overall home gateway target for a given configuration and mode of operation, but are not themselves normative.

The home gateway must meet the power targets for idle-state and for on-state as defined in section B.1. Depending on the actual state of the individual components, several intermediate power consumption levels for the home gateway exist.

The values per component for the idle-state and the on-state are given in the following tables.

If an interface is able to work in different modes it must establish a link with the highest possible capability and the targets have to be chosen accordingly. This for example applies to VDSL2, Wi-Fi 802.11n interfaces or Gigabit Ethernet LAN ports. I.e., for a Gigabit Ethernet interface, a Gigabit Ethernet capable device must be connected for measurement purposes and the Gigabit Ethernet target applies. The targets are defined taking into account that certain interfaces may have this capability of falling back from a higher capability to a lower one. If a lower capability device is connected, the power consumption should be lower and ideally reach the target of this lower capability technology, i.e., if a Fast Ethernet device is connected to a Gigabit Ethernet LAN port. Measurements in such lower capability configuration are not to be reported.

In cases where an interface is a removable module (e.g. Small Form-factor Pluggable (SFP) devices), vendors providing a CPE but no removable module must test the CPE without the module and report results, while vendors providing a CPE with removable modules and operators must test with the removable module present and with the allowances associated with it. If different types of modules are to be used by a single product, each type must meet the allocated budget but only the highest measurement is to be reported. Additional rules described below also apply in the case where the module is used in dual or backup WAN configurations.

In case of dual WAN, with reference to the definition of states, the calculation of targets for idle and on state will be performed on the basis of the following rules:

In case of dual WAN interface for backup or alternative purposes, the backup or alternative interface will be activated when the main interface loses connectivity. Additional allowances for the backup interfaces are found in Table 10a. Although only one WAN interface is active at any time, the calculation of the total budget must not take into account which interface is idle and which is active during testing and must be calculated only once. This total budget must be met under the below two conditions (and only the highest value for the Idle-State and the highest value for the On-state must be reported):

- The first one, corresponding to the situation when the main WAN interface is active and the backup or alternative interface is disconnected or not active
- The second one, corresponding to the situation when the backup is activated and the main interface is disconnected or not active

⁽⁵⁾ A home gateway is used here as a generic term which encompasses all kinds of access interfaces (e.g. DSL, cable, fibre, etc.).

In case of dual WAN interface for simultaneous operation, additional allowances for the additional interfaces are found in Table 10b. The targets must be met under a test condition where both WAN interfaces are simultaneously connected and active in On mode.

Table 10: Power values for home gateway central functions plus WAN interface

Home gateway central functions plus WAN interface	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)
ADSL2plus	2,0	2,4	2,0	2,1	2,0	2,1
VDSL2 (8, 12a, 17a) Note 10.3	3,0	3,7	3,0	3,5	3,0	3,5
VDSL2 (35b) Note 10.3	4,0	4,4	3,8	4,0	3,8	4,0
G.fast (106a, 106b, 106c)	3,5	3,8	3,5	3,8	3,5	3,8
G.fast (212a, 212c)	4,4	4,8	4,4	4,7	4,4	4,7
Fast Ethernet WAN	1,4	1,7	1,4	1,7	1,4	1,7
Gigabit Ethernet WAN	2,3	3,5	2,3	3,3	2,3	3,3
2.5 Gigabit Ethernet WAN	2,9	5,0	2,9	5,0	tbd	tbd
5 Gigabit Ethernet WAN	2,9	5,0	2,9	5,0	tbd	tbd
10-Gigabit Ethernet WAN	3,9	6,5	3,9	6,5	tbd	tbd
Fibre PtP Fast Ethernet WAN	2,1	3,9	2,1	3,9	tbd	tbd
Fibre PtP Gigabit Ethernet WAN	2,1	4,1	2,1	4,1	tbd	tbd
GPON	3,0	3,2	2,8	3,0	2,7	2,9
1G-EPON	3,0	3,2	2,8	3,0	2,7	2,9
10/1G-EPON	3,0	4,0	2,9	3,8	2,8	3,8
10/10G-EPON	3,3	5,0	3,2	5,0	3,0	5,0
10/2.5 XG-PON1	3,0	4,5	2,9	4,5	2,8	4,5
10/2.5 NG-PON2	3,0	4,5	3,0	4,5	tbd	tbd
10/10 XGS-PON	3,3	5,5	3,2	5,1	3,0	4,8
10/10 NG-PON2	3,3	5,5	3,3	5,5	3,3	tbd
DOCSIS 3.0 basic configuration	5,0	5,5	5,0	5,5	5,0	5,5
DOCSIS 3.0 additional power allowance for each additional 4 downstream channels	1,2	1,8	1,2	1,8	1,2	1,8
DOCSIS 3.1	9,8	13,4	9,3	13,1	tbd	tbd
4G	2,8	4,0	2,8	4,0	tbd	tbd

Source: JRC, 2021

Notes

- (10.1) The ONU values shown in Table 10 assume that the home gateway central functions include a Gigabit Ethernet switch functionality (the additional power budget for the PHY interface of the LAN ports will have to be accounted separately).
- (10.2) The above consumption targets for all ONUs in Table 10 assume the use of optics that meet the PR-30 or PRX-30 power budgets (IEEE 802.3) or ITU-T G.984.2/G.987.2 [14] Class B/B+ power budgets, whichever is applicable.
- (10.3) VDSL2 allowances include Home Gateways supporting G.993.5 (Vectoring) [16].

Table 10a: Power values for home gateway additional Backup WAN interface

Home gateway additional Backup WAN interface	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)
ADSL2plus	0,3	1,0	0,3	1,0	0,3	1,0
VDSL2 (8, 12a, 17a) Note 10.3	0,4	0,4	0,4	0,4	0,4	0,4
VDSL2(35b) Note 10.3	0,4	0,4	0,4	0,4	0,4	0,4
G.fast (106a, 106b, 106c)	0,4	0,4	0,4	0,4	0,4	0,4
G.fast (212a, 212c)	0,4	0,4	0,4	0,4	0,4	0,4
Fast Ethernet WAN	0,2	0,2	0,2	0,2	0,2	0,2
Gigabit Ethernet WAN	0,3	0,3	0,3	0,3	0,3	0,3
2.5 Gigabit Ethernet WAN	0,8	0,8	0,8	0,8	tbd	tbd
5 Gigabit Ethernet WAN	0,8	0,8	0,8	0,8	tbd	tbd
10-Gigabit Ethernet WAN	1,5	1,5	1,5	1,5	tbd	tbd
Fibre PtP Fast Ethernet WAN	1,2	1,2	1,2	1,2	tbd	tbd
Fibre PtP Gigabit Ethernet WAN	1,4	1,4	1,4	1,4	tbd	tbd
4G	1,2	1,2	1,2	1,2	tbd	tbd

Source: JRC, 2021

Table 10b: Power values for home gateway additional Simultaneous WAN interface

Home gateway additional Simultaneous WAN interface	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)
ADSL2plus Note 10.3	0,9	1,0	0,9	1,0	0,9	0,7
VDSL2 (8, 12a, 17a) Note 10.3	1,6	1,6	1,6	1,6	1,6	1,4
VDSL2 (35b) Note 10.3	2,0	2,2	2,0	2,2	2,0	1,8
G.fast (106a, 106b, 106c)	1,6	2,0	1,6	2,0	1,6	2,0
G.fast (212a, 212c)	2,6	3,2	2,6	3,2	2,6	3,1
Fast Ethernet WAN	0,4	0,5	0,4	0,5	0,4	0,5
Gigabit Ethernet WAN	0,6	0,8	0,6	0,8	0,6	0,6
2.5 Gigabit Ethernet WAN	2,5	2,5	2,5	2,5	tbd	tbd
5 Gigabit Ethernet WAN	2,5	2,5	2,5	2,5	tbd	tbd
10 Gigabit Ethernet WAN	3,5	3,5	3,5	3,5	tbd	tbd
Fibre PtP Fast Ethernet WAN	1,2	2,3	1,2	2,3	tbd	tbd
Fibre PtP Gigabit Ethernet WAN	1,4	2,8	1,4	2,8	tbd	tbd
4G	1,9	3,4	1,9	3,4	tbd	tbd

Source: JRC, 2021

Table 11: Power values for home gateway LAN interfaces and additional functionality

Home gateway LAN interfaces and additional functionality	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)
1 Fast Ethernet port	0,2	0,3	0,2	0,2	0,2	0,2
1 Gigabit Ethernet port	0,2	0,4	0,2	0,3	0,2	0,3
2.5 Gigabit Ethernet	0,8	2,5	0,8	2,4	0,8	2,4
5 Gigabit Ethernet	0,8	2,5	0,8	2,5	0,8	tbd
10 Gigabit Ethernet	1,5	3,5	1,5	3,5	1,5	tbd
Network Processor	0,3	0,5	0,3	0,5	0,3	0,4
AI Processor	0,6	0,6	0,6	0,6	0,5	0,5
Wi-Fi interface, IEEE 802.11g with up to 20 dBm EIRP or 11a/h radio with up to 23 dBm EIRP Note 11.1	0,7	1,1	0,7	1,0	0,7	1,0
Wi-Fi interface, IEEE 802.11a/h radio with up to 30 dBm EIRP Note 11.1	0,7	1,8	0,7	1,8	0,7	1,8
Wi-Fi interface, IEEE 802.11n radio at 2,4 GHz with up to 20 dBm total EIRP (up to 2x2) or at 5,0 GHz with up to 23 dBm total EIRP (up to 2x2) Note 11.1	0,8	1,6	0,7	1,4	0,7	1,4
Wi-Fi interface, IEEE 802.11n radio at 5 GHz with up to 30 dBm total EIRP (up to 2x2) Note 11.1	0,8	2,0	0,7	1,8	0,7	1,6
Wi-Fi, IEEE 802.11ac 2x2 radio at 2,4 GHz (20 MHz channel BW) with up to 17 dBm EIRP per chain (20 dBm EIRP total for 2x2) Note 11.1	1,0	2,0	0,9	1,8	0,9	1,8
Wi-Fi, IEEE 802.11ac 2x2 radio at 2,4 GHz (40 MHz channel BW) with up to 17 dBm EIRP per chain (20 dBm EIRP total for 2x2) Note 11.1	1,6	2,2	1,4	1,9	1,4	1,9
Wi-Fi, IEEE 802.11ac 2x2 radio at 5 GHz (20, 40, 80 MHz BW) with up to 20 dBm EIRP per chain (23 dBm EIRP total for 2x2) Note 11.1	1,6	2,1	1,6	1,9	1,6	1,9
Wi-Fi, IEEE 802.11ac 2x2 radio at 5 GHz (20, 40, 80 MHz BW) with up to 27 dBm EIRP per chain (30 dBm EIRP total for 2x2) Note 11.1	1,8	2,5	1,8	2,3	1,8	2,1

Home gateway LAN interfaces and additional functionality	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)
Wi-Fi, IEEE 802.11ac 2x2 radio at 5 GHz (160 MHz channel BW) with up to 20 dBm EIRP per chain (23 dBm EIRP total for 2x2) Note 11.1	2,2	2,7	2,2	2,5	2,2	2,5
Wi-Fi, IEEE 802.11ac 2x2 radio at 5 GHz (160 MHz channel BW) with up to 27 dBm EIRP per chain (30 dBm EIRP total for 2x2) Note 11.1	2,9	3,4	2,9	3,2	2,9	3,1
Wi-Fi, IEEE 802.11ax 2x2 radio at 2,4 GHz (20 MHz channel BW) with up to 17 dBm EIRP per chain (20 dBm EIRP total for 2x2) Note 11.1	1,8	2,5	1,8	2,2	1,7	2,0
Wi-Fi, IEEE 802.11ax 2x2 radio at 2,4 GHz (40 MHz channel BW) with up to 17 dBm EIRP per chain (20 dBm EIRP total for 2x2) Note 11.1	2,1	2,7	2,0	2,3	2,0	2,3
Wi-Fi, IEEE 802.11ax 2x2 radio at 5 GHz (20, 40, 80 MHz channel BW) with up to 20 dBm EIRP per chain (23 dBm EIRP total for 2x2) Note 11.1	2,0	2,7	1,8	2,4	1,8	2,2
Wi-Fi, IEEE 802.11ax 2x2 radio at 5 GHz (20, 40, 80 MHz channel BW) with up to 27 dBm EIRP per chain (30 dBm EIRP total for 2x2) Note 11.1	2,7	3,2	2,5	2,7	2,5	2,6
Wi-Fi, IEEE 802.11ax 2x2 radio at 5 GHz (160 MHz channel BW) with up to 20 dBm EIRP per chain (23 dBm EIRP total for 2x2) Note 11.1	2,4	3,0	2,3	2,7	2,2	2,6
Wi-Fi, IEEE 802.11ax 2x2 radio at 5 GHz (160 MHz channel BW) with up to 27 dBm EIRP per chain (30 dBm EIRP total for 2x2) Note 11.1	3,1	3,5	3,0	3,2	2,9	3,2
Additional allowance per 802.11n RF chain above a 2x2 MIMO configuration (e.g., for 3x3 and 4x4) with up to 20 dBm EIRP per chain	0,1	0,3	0,1	0,2	0,1	0,2
Additional allowance per 802.11n RF chain above a 2x2 MIMO configuration (e.g., for 3x3 and 4x4) with up to 27 dBm EIRP per chain	0,1	0,4	0,1	0,3	0,1	0,3

Home gateway LAN interfaces and additional functionality	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)
Additional allowance per 802.11ac RF chain above a 2x2 MIMO configuration (e.g., for 3x3 and 4x4) with up to 20 dBm EIRP per chain	0,3	0,6	0,3	0,5	0,3	0,5
Additional allowance per 802.11ac RF chain above a 2x2 MIMO configuration (e.g., for 3x3 and 4x4) with up to 27 dBm EIRP per chain	0,3	0,7	0,3	0,6	0,3	0,5
Additional allowance per 802.11ax RF chain above a 2x2 MIMO configuration (e.g., for 3x3 and 4x4) with up to 20 dBm EIRP per chain	0,3	0,7	0,3	0,6	0,3	0,5
Additional allowance per 802.11ax RF chain above a 2x2 MIMO configuration (e.g., for 3x3 and 4x4) with up to 27 dBm EIRP per chain	0,4	0,8	0,4	0,7	0,4	0,6
HPNA	1,5	2,0	1,5	2,0	1,5	2,0
MoCA 1.1	1,5	2,0	1,5	2,0	1,5	2,0
MoCA 2.0 (single channel)	1,5	2,0	1,5	2,0	1,5	2,0
Powerline - High speed for broadband home networking (up to 30MHz bandwidth)	1,2	1,6	1,2	1,6	1,2	1,6
Powerline - High speed for broadband home networking (up to 68 MHz bandwidth)	1,5	2,4	1,5	2,4	1,5	2,4
Powerline - High speed for broadband home networking (up to 86 MHz bandwidth)	3,5	4,0	3,5	4,0	3,5	4,0
High speed Powerline adapters (2xN up to 86 MHz bandwidth)	4,0	5,0	4,0	5,0	4,0	5,0
Powerline - Low speed for smart metering and appliances control (Green Phy)	0,5	1,2	0,5	1,2	0,5	1,2
FXS (First interface)	0,2	0,9	0,2	0,8	0,2	0,8
FXS (Additional interface)	0,2	0,2	0,2	0,2	0,2	0,2
FXO	0,2	0,6	0,2	0,6	0,2	0,6
Emergency fall-back to analog telephone per FXS	0,1	0,2	0,1	0,2	0,1	0,2
DECT GAP	0,5	0,9	0,5	0,7	0,5	0,7
DECT Cat-iq	0,5	0,9	0,5	0,7	0,5	0,7
DECT ULE	0,1	0,2	0,1	0,2	0,1	0,2

Home gateway LAN interfaces and additional functionality	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)
DECT charging station for DECT handset in slow/trickle charge	0,4	n.a.	0,4	n.a.	0,4	n.a.
USB 2.0 Note 11.3	0,1	0,1	0,1	0,1	0,1	0,1
USB 3.0 Note 11.3	0,1	0,1	0,1	0,1	0,1	0,1
USB 3.1 Note 11.3	0,1	0,1	0,1	0,1	0,1	0,1
SATA – no load connected	0,2	0,2	0,2	0,2	0,2	0,2
HDMI	0,2	0,2	0,2	0,2	0,2	0,2
Built-in back-up battery	0,1	0,1	0,1	0,1	0,1	0,1
Bluetooth	0,1	0,2	0,1	0,2	0,1	0,2
ZigBee	0,1	0,1	0,1	0,1	0,1	0,1
Z-Wave	0,1	0,1	0,1	0,1	0,1	0,1
Narrowband-IoT	0,1	0,1	0,1	0,1	0,1	0,1
IEC 14543-310 (“EnOcean”)	0,1	0,1	0,1	0,1	0,1	0,1
Near Field Communication (NFC)	0,2	0,2	0,2	0,2	0,2	0,2
Integrated Storage (Flash e.g. eMMC, SSD or SD Card)	0,1	0,1	0,1	0,1	0,1	0,1
PCIe (Connected) Note 11.2	0,2	0,2	0,2	0,2	0,2	0,2
PCIe for each additional lane (e.g. x2)	0,1	0,1	0,1	0,1	0,1	0,1
RF modulator (TV overlay for fibre network)	2,5	3,0	2,0	2,7	2,0	2,7
Embedded hands-free system	0,3	0,5	0,3	0,5	0,3	0,5
Additional Colour Display with Display size defined by area A in (dm ²); (typically found in VoIP devices)						
A ≤ 0,10	0,5	0,5	0,5	0,5	0,5	0,5
0,10 < A ≤ 0,30		0,8		0,8		0,8
0,30 < A ≤ 0,50		1,1		1,1		1,1
0,50 < A ≤ 0,70		1,4		1,4		1,4
0,70 < A ≤ 1,00		1,7		1,7		1,7
1,00 < A ≤ 1,40		2,0		2,0		2,0
1,40 < A ≤ 1,80		2,2		2,2		2,2
1,80 < A ≤ 2,20		2,4		2,4		2,4
2,20 < A ≤ 2,80		2,8		2,8		2,8

Source: JRC, 2021

Notes:

- (11.1) For simultaneous dual-band operation the allowances for the individual radios can be summed up.
- (11.2) PCIe allowance is for an internal bus with 2 interfaces.
- (11.3) The indicated allowance is either for an unconnected externally accessible USB interface, or for an internally connected USB interface. Also see section C.1.2.

There are types of home gateway device (e.g., a USB attached DSL modem or pure Layer 2 ONUs) that are so simple (e.g., only provide Layer 2 functionalities, does not contain an Ethernet switch, and has a single LAN interface) that it cannot be usefully decomposed into components. The power targets for such devices are given in Table 12.

Table 12: Power targets for simple broadband access devices (modems and NTs)

Modem and NT total power target for simple broadband access devices	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	<i>CPE-Idle-State (W)</i>	<i>CPE-On-State (W)</i>	<i>CPE-Idle-State (W)</i>	<i>CPE-On-State (W)</i>	<i>CPE-Idle-State (W)</i>	<i>CPE-On-State (W)</i>
GPON ONU with 1 Gigabit Ethernet LAN port	2,1	2,4	2,1	2,4	2,1	2,4
1G-EPON ONU with 1 Gigabit Ethernet LAN port	2,1	2,4	2,1	2,4	2,1	2,4
10/1G-EPON ONU with 1 Gigabit Ethernet LAN port	3,4	3,9	3,4	3,9	3,4	3,9
10/10G-EPON ONU with 1 Gigabit Ethernet LAN port	3,8	4,9	3,8	4,9	3,8	4,9
10/2.5 XG-PON1 or NG-PON2 ONU with 1 Gigabit Ethernet LAN port	3,4	4,2	3,4	4,2	3,4	4,2
10/10 XGS-PON or NG-PON2 ONU with 1 Gigabit Ethernet LAN port	3,7	5,2	3,7	5,2	3,7	5,2
Fast Ethernet PtPONU with 1 Fast Ethernet LAN port	2,3	2,5	2,3	2,5	2,3	2,5
Gigabit Ethernet PtP ONU with 1 Gigabit Ethernet LAN port	2,5	2,8	2,5	2,8	2,5	2,8

Source: JRC, 2021

Notes:

- (12.1) USB Modem Power consumption (W) is defined at the 5V USB Interface.
- (12.2) The above consumption targets for all ONUs in Table 12 assume the use of optics that meet the PR-30 or PRX-30 power budgets (IEEE 802.3) or ITU-T G.984.2/G.987.2 Class B+ power budgets, whichever is applicable.
- (12.3) If the ONU has a Fast Ethernet LAN port instead of a Gigabit Ethernet port the power targets are reduced by the difference between a Fast Ethernet LAN and a Gigabit Ethernet LAN port from Table 11.

C.1.2 USB dongles

For a home gateway with USB ports additional functionality originally not built into the device can also be provided via USB dongles. The power consumption of USB dongles is measured at the DC 5V USB interface.

For a home gateway with an internal USB device, the power budget shall include the value of the USB device defined in Table 13 multiplied by a factor of (1/0.84) plus the USB value for the interface defined in Table 11 (also see note (11.3)).

Please note that the USB devices are considered as not equipped with additional chipsets implementing applications or complex software stacks that will drastically change the power values.

Table 13: Power values for USB dongles

USB powered peripherals and dongles	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)
3G/4G	0,4	1,5	0,4	1,5	0,4	1,5
DECT	0,2	0,4	0,2	0,4	0,2	0,4
DECT GAP	0,2	1,0	0,2	1,0	0,2	1,0
DECT Cat-iq	0,2	0,4	0,2	0,4	0,2	0,4
DECT ULE	0,1	0,2	0,1	0,2	0,1	0,2
Wi-Fi interface single IEEE 802.11b/g or 1x1 IEEE 802.11n radio Note 13.1	0,5	1,5	0,5	1,5	0,5	1,5
Bluetooth	0,1	0,2	0,1	0,2	0,1	0,2
ZigBee	0,1	0,2	0,1	0,2	0,1	0,2
Z-Wave	0,1	0,2	0,1	0,2	0,1	0,2
IEC 14543-310 ("EnOcean")	0,1	0,2	0,1	0,2	0,1	0,2

Source: JRC, 2021

Notes:

(13.1) For Wi-Fi USB dongles with more than 1 RF chain, an allowance for additional RF chains as defined in Table 11 can be added.

C.1.3 Home Network Infrastructure Devices**Table 14:** Power targets for Home Network Infrastructure Devices (HNID)

Power targets for Home Network Infrastructure Devices	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)
Wi-Fi Access Points with IEEE 802.11b/g or 11a 2x2 radio	1,9	2,4	1,9	2,4	1,9	2,4
Wi-Fi Access Points with IEEE 802.11n or 802.11ac 2x2 radio with up to 20 dBm total EIRP at 2,4 GHz	1,9	2,7	1,9	2,5	1,9	2,4
Wi-Fi Access Points with IEEE 802.11n or 802.11ac 2x2 radio with up to 23 dBm total EIRP at 5 GHz	3,4	4,3	3,4	4,1	3,4	3,9
Wi-Fi Access Points with IEEE 802.11n or 802.11ac 2x2 radio with up to 30 dBm total EIRP at 5 GHz	3,4	5,0	3,4	4,8	3,4	4,6
Gigabit Ethernet optical LAN adapters (fiber converter or POF adapter)	2,5	2,5	2,5	2,5	2,5	2,5
Ethernet optical LAN adapters (fiber converter or POF adapter) up to 200 Mbit/s	1,2	1,2	1,2	1,2	1,2	1,2
MoCA LAN adapters	3,0	3,0	3,0	3,0	3,0	3,0

Power targets for Home Network Infrastructure Devices	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)	Idle-State (W)	On-State (W)
DECT ULE LAN adapters	0,2	0,2	0,2	0,2	0,2	0,2
ZigBee LAN adapters	0,2	0,2	0,2	0,2	0,2	0,2
Z-Wave LAN adapters	0,2	0,2	0,2	0,2	0,2	0,2
IEC 14543-310 ("EnOcean") LAN adapters	0,2	0,2	0,2	0,2	0,2	0,2
High speed Powerline adapters (up to 30 MHz bandwidth)	2,3	3,0	2,3	3,0	2,3	3,0
High speed Powerline adapters (up to 68 MHz bandwidth)	2,5	3,5	2,5	3,5	2,5	3,5
High speed Powerline adapters (up to 86 MHz bandwidth)	3,8	4,0	3,8	4,0	3,8	4,0
High speed Powerline adapters (2xN up to 86 MHz bandwidth)	4,5	5,0	4,5	5,0	4,5	5,0
Powerline – low speed for smart metering and appliance control (Green Phy)	2,0	3,0	2,0	3,0	2,0	3,0
HPNA LAN adapter	3,2	3,6	3,2	3,6	3,2	3,6
Small hubs and non-managed 4 port Layer 2 Fast Ethernet switches without CPU (no VPN or VoIP)	1,3	1,8	1,3	1,8	1,3	1,8
Small hubs and non-managed 4 port Layer 2 Gigabit Ethernet switches without CPU (no VPN or VoIP)	1,4	2,5	1,4	2,5	1,4	2,5

Source: JRC, 2021

An HNID is typically a relatively simple device, where 1 Ethernet LAN port is already considered to be part of the initial configuration. Ethernet switches with 4 ports are considered to be part of the initial configuration. If an HNID has more than 4 Ethernet ports, additional allowances for those Ethernet ports can be added as defined in Table 11.

For more complex HNIDs, the same allowances for additional functionality apply as for home gateways (see Table 11). A function used for control or monitoring such as smart plugs, smart sensor and remote controllable light devices are considered equivalent to an HNID.

C.1.4 Other Home Network Devices

Table 15: Power targets for other home network devices

Power targets for Home Network Devices	Tier 2021: 1.1.2021 - 31.12.2021		Tier 2022: 1.1.2022 - 31.12.2022		Tier 2023: 1.1.2023 - 31.12.2023	
	<i>Idle-State (W)</i>	<i>On-State (W)</i>	<i>Idle-State (W)</i>	<i>On-State (W)</i>	<i>Idle-State (W)</i>	<i>On-State (W)</i>
ATA / VoIP gateway	1,3	1,7	1,3	1,7	1,3	1,7
VoIP telephone	2,4	2,9	2,4	2,9	2,4	2,9
VoIP telephone including Gigabit Ethernet Switching Function	3,4	3,5	3,4	3,5	3,4	3,5

Source: JRC, 2021

Some types of other home network devices require additional functionality; in that case the same allowances for additional functionality apply as for home gateways (see Table 11).

C.2 Network equipment

The following targets are power consumption targets per port.

- a) All power values of the DSL network equipment in line with C.2.1 (except G.fast), C.2.2 and C.2.3 are measured at the power interface port interface as described in the standard ETSI EN 303 215 [15] or at the AC input, in case of directly mains powered systems. For directly mains (AC) powered DSL, optical and wireless systems, the power limits stated in Table 16 through Table 26 (except Table 16b, Table 17a and Table 18) are increased by 10%. In case of integrated remote or reverse (AC or DC) powered systems, the power limits stated are increased by 15%.
- b) Power measurements of the G.fast equipment shall be performed on fully equipped, maximum configured DPU's (100% of activated ports). The power consumption numbers specified in Table 16b, Table 17a and Table 18 assume no extra allowance for <=128 lines and no extra allowance for vectoring. Depending on the different types of powering, the power limits specified in Table 16b, Table 17a and Table 18 should be increased by additional allowances defined in Table 16c.
- c) For multi-profile boards, the power consumption limits do not apply to boards profile not optimized under energy efficiency point of view. Equipment makers shall specify what the optimized profile for the given board under test is at which the power consumption target limit apply. For instance, a board optimized for VDSL2 8b can support other profiles (e.g., 12a, 17a, 30a) but might have suboptimal performance at such additional profiles in terms of power consumption.
- d) For boards which have additional functions (e.g., channel bonding) in addition to the bare DSL functionality, such boards are to be used in normal DSL mode of operation with any additional functions disabled. Optionally, a measurement with these functions enabled can be described/requested. If such additional functions cannot be fully disabled, manufacturers will declare what the extra power budget due to the added functionality is. Such an extra budget will not be considered in the per port power consumption computation.
- e) In Table 16a, "vectored VDSL2" refers to a DSLAM that supports vectoring per ITU-T G.993.5 [16] on all its lines and operates with one or multiple vectored groups. Each line is included in one vectored group. The term "vectored group" is defined in ITU-T G.993.5. The DSLAM is configured for VDSL2 operation according to ETSI EN 303 215 [15] with upstream and downstream vectoring enabled on all its lines. For the configured profile, the DSLAM operates on all its lines at its maximum supported transmit power and over the widest frequency bands over which it supports vectoring. The DSLAM operates at its maximum cancellation capabilities in terms of number of cancelled disturbers and of SNR improvement gained with cancellation.

C.2.1 Broadband DSL and G.fast network equipment

Table 16: DSL Broadband ports – full-load state (with service traffic on the lines as specified in Table 7)

Power targets for DSL-full-load-state	Tier 2021 (1.1.2021- 31.12.2021) (W)	Tier 2022 (1.1.2022- 31.12.2022) (W)	Tier 2023 (1.1.2023- 31.12.2023) (W)
VDSL2 (profile 8b) transmission power 19,8 dBm	1,3	1,2	1,1
VDSL2 (profile 12a and 17a) transmission power 14,5 dBm	1,2	1,1	1,0
VDSL2-LR (profile 8b, 12a and 17a) transmission power 20,5 dBm	1,5	1,4	1,2
VDSL2 (profile 35b) transmission power 17 dBm	1,6	1,5	1,3
VDSL2-LR (profile 35b) transmission power 20,5 dBm	1,6	1,5	1,3
VDSL2 (profile 35b) based on G.fast capable transceiver 17 dBm (Note 16.0)	2,5	2,3	2,0

Source: JRC, 2021

Notes:

(16.0) The above values apply to fully equipped, maximum configuration DSLAMs with more than 128 ports. For equipment up to 128 ports (and with maximum configuration) 0,15 W per line may be added to the above values, with a minimum value of 5 W for the whole DSLAM.

Table 16a: DSL Broadband ports – full-load state
for Vectoring capable VDSL2 equipment

Equipment	Tier 2021 (1.1.2021- 31.12.2021) (W)	Tier 2022 (1.1.2022- 31.12.2022) (W)	Tier 2023 (1.1.2023- 31.12.2023) (W)
Vectored VDSL2 (profile 8b, 12a and 17a) without crosstalk cancelling among boards, including VDSL2-LR	+0,05	+0,05	+0,05
Vectored VDSL2 (profile 8b, 12a and 17a) with crosstalk cancelling among boards for up to 128 ports, including VDSL2-LR	+0,15	+0,15	+0,15
Vectored VDSL2 (profile 8b, 12a and 17a) with crosstalk cancelling among boards for more than 128 ports, including VDSL2-LR	+0,4	+0,4	+0,4
Vectored VDSL2 (profile 35b) without crosstalk cancelling among boards, including VDSL2-LR	+0,1	+0,1	+0,1
Vectored VDSL2 (profile 35b) with crosstalk cancelling among boards for up to 128 ports, including VDSL2-LR	+0,3	+0,3	+0,3
Vectored VDSL2 (profile 35b) with crosstalk cancelling among boards for more than 128 ports, including VDSL2-LR	+0,6	+0,6	+0,6

Source: JRC, 2021

Notes:

(16.1) Consumption limits are expressed as an additional allowance in [W/port] to be applied to the corresponding consumption target for non-vectoring capable VDSL2 equipment (see Table 16).

Table 16b: G.fast broadband ports – full-load-state
(with service traffic on the lines as specified in Table 7)

Power targets for G.fast full-load-state	Tier 2021 (1.1.2021- 31.12.2021) (W)	Tier 2022 (1.1.2022- 31.12.2022) (W)	Tier 2023 (1.1.2023- 31.12.2023) (W)
Profile 106a and 106c			
G.fast single line DPU	4,3	4,3	4,3
G.fast small multiline DPU, 1-4 lines	3,0	3,0	3,0
G.fast small multiline DPU, 5-16 lines	3,0	2,7	2,4
G.fast large multiline DPU, 17-48 lines	3,0	2,7	2,4
G.fast very large multiline DPU, 49-128 lines	2,7	2,5	2,5

Profile 106b			
G.fast single line DPU	4,6	4,6	4,6
G.fast small multiline DPU, 1-4 lines	3,3	3,3	3,3
G.fast small multiline DPU, 5-16 lines	3,3	3,0	2,7
G.fast large multiline DPU, 17-48 lines	3,3	3,0	2,7
G.fast very large multiline DPU, 49-128 lines	3,0	2,7	2,4
Profile 212a and 212c			
G.fast single line DPU	5,8	5,8	5,8
G.fast small multiline DPU, 1-4 lines	5,7	5,7	5,7
G.fast small multiline DPU, 5-16 lines	5,7	4,9	4,0
G.fast large multiline DPU, 17-48 lines	5,2	4,5	3,7
G.fast very large multiline DPU, 49-128 lines	5,0	4,3	3,5

Source: JRC, 2021

The above values in Table 16b apply to fully equipped, maximum configuration DPUs within each category (single line, small, large or very large multiline). These numbers assume no extra allowance for ≤ 128 lines and no extra allowance for vectoring.

Table 16c: Allowances for different types of powering of DPU

Power type	Tier 2021 (1.1.2021- 31.12.2021)	Tier 2022 (1.1.2022- 31.12.2022)	Tier 2023 (1.1.2023- 31.12.2023)
Local Power from AC mains source	10%	10%	10%
Forward Power from a Network Node	15%	15%	15%
Reverse Power from the CPE	15%	15%	15%

Source: JRC, 2021

Table 17: Broadband ports – DSL-low-power-state

Power targets for DSL-low-power-state	Tier 2021 (1.1.2021–31.12.2021) (W)	Tier 2022 (1.1.2022–31.12.2022) (W)	Tier 2023 (1.1.2023–31.12.2023) (W)
VDSL2 L2.1 low power state (transport of VoIP (POTS level) and keep alive data) compared to full-load-state target per Table 16 and 16a	-25% ⁱ	-25% ⁱ	-25% ⁱ
VDSL2 L2.2 low power state (transport of "keep alive" data at times when there is no user activity) compared to full-load-state target per Table 16 and 16a	-50% ⁱ	-50% ⁱ	-50% ⁱ

Source: JRC, 2021

Notes:

Values marked i provide an indication for the power consumption.

- (17.0) The DSL-low-power-state should allow transport of VoIP (POTS data) and keep-alive data at different levels of power saving and quality of service. VDSL2 low power mode (LPMoDe) is defined in Annex E of ITU-T G.998.4 [20] as the optional operation functionality. Therefore, Table 17 is applicable only to VDSL2 systems that support low power state. CO-MIB configuration parameters related to LPMoDe are defined in Table E.1 [20].

Table 17a: Broadband ports – G.fast low-power-state

Power targets for G.fast low-power-state	Tier 2021 (1.1.2021–31.12.2021) (W)	Tier 2022 (1.1.2022–31.12.2022) (W)	Tier 2023 (1.1.2023–31.12.2023) (W)
L2.1 low power with mains powering (L2.1N)	N/A	N/A	N/A
L2.1 low power with battery powering (L2.1B)	N/A	N/A	N/A
L2.2 low power state (L2.2)	N/A	N/A	N/A

Source: JRC, 2021

Notes:

- (17.1) L2.1 low power state (with two sub-states: L2.1N and L2.1B) allows substantial reduction in power consumption and is primarily intended for support of VoIP, while other services are unused. L2.2 low power state is intended for keep-alive applications during multi-hour battery backup and it implements significant reduction of power consumption (resulting in extremely reduced data rate and loss of QoS).

Table 18: Broadband ports – DSL and G.fast standby-state

Power targets for standby-state	Tier 2021 (1.1.2021–31.12.2021) (W)	Tier 2022 (1.1.2022–31.12.2022) (W)	Tier 2023 (1.1.2023–31.12.2023) (W)
VDSL2 (Note 18.1)	0,5	0,5	0,5
G.fast for DPUs up to 16 ports (Note 18.1)	N/A	N/A	N/A

Source: JRC, 2021

Notes:

- (18.1) DSL-standby-state corresponds to the L3-Idle state as defined in ITU-T Rec G.993. 2 [17]. G.fast-standby-state corresponds to the L3-Idle state as defined in ITU-T Rec G.9701 [22]. Stand-by targets do not apply to the Vectoring capable VDSL2 or Vectoring capable G.fast.

The above values for DSL-low-power and -standby-states are for fully equipped, maximum configuration DSLAMs with more than 128 ports. For equipment up to 128 ports (and with maximum configuration) 0,15W per line may be added to the above values for the whole DSLAM, with a minimum value of 5W.

The above G.fast values apply to fully equipped, maximum configuration DPUs within each category (single line, small, large or very large multiline). These numbers assume no extra allowance for <=128 lines and no extra allowance for vectoring.

To minimize cost, dimensions, and power consumption, the network equipment contains chips that control multiple DSL lines (4-8-16) each. If special care is not taken, a single line in DSL-full-load-state could result in a chip fully operational on the other lines also (in low-power or standby states), resulting in an unnecessary waste of energy. The network systems (and their basic components) shall therefore be designed in order to tackle this issue, maximizing the energy savings also in mixed environments with lines in different power states, being this the typical situation found in the network.

MELT-stand-by state is defined as the state in which the Metallic Line Testing entity (MELT) is in IDLE mode, i.e., inactive, connected in parallel to the broadband port on the DSLAM and provisioned for line testing. MELT standby targets are additional allowances on top of the power consumption targets defined for each of DSL operating states.

Table 18a: Broadband ports – MELT-stand-by state

Power targets for MELT-standby state	Tier 2021 (1.1.2021-31.12.2021) (mW)	Tier 2022 (1.1.2022-31.12.2022) (mW)	Tier 2023 (1.1.2023-31.12.2023) (mW)
VDSL2	+30	+30	+30

Source: JRC, 2021

An additional allowance for each uplink interface (applicable for all power states: full-load, low-power and standby) is defined below:

Table 18b: Uplink Interfaces

Uplink Interfaces (Note 18.2)	Tier 2021 (1.1.2021 - 31.12.2021) (W)	Tier 2022 (1.1.2022 - 31.12.2022) (W)	Tier 2023 (1.1.2023 - 31.12.2023) (W)
PtP 1000Mbit/s (Energy Efficient Ethernet)	1,8	1,8	1,8
PtP 10Gbit/s (Energy Efficient Ethernet)	5,5	5,5	5,5
PtP 25Gbit/s (Energy Efficient Ethernet)	12,5	12,5	12,5
PtP 100Gbit/s (Energy Efficient Ethernet)	45,0	45,0	45,0
PON (GPON) (2.5G/1G)	3,7	3,7	3,7
XG-PON1 (10G/2.5G)	4,6	4,6	4,6
XGS-PON (10G/10G)	8,6	8,6	8,6
NG-PON2 (40G/10G)	11,0	11,0	11,0
PON (1G-EPON)	1,8	1,8	1,8
PON (10G/1G-EPON)	4,6	4,6	4,6
PON (10G/10G-EPON)	5,5	5,5	5,5

Source: JRC, 2021

Notes:

(18.2) The energy consumption targets for 2020 will be revised in 2019.

C.2.2 Combined DSL/Narrowband network equipment

Combined DSL/Narrowband network equipment is covered in the Code of Conduct on Energy Consumption of Broadband Equipment Version 6.

Table 19: Table deleted

This table has been removed from version 7 onwards. The reference has not been deleted to maintain the list of references consistent across versions.

C.2.3 Optical Line Terminations (OLT) for PON and PtP networks

Table 20: Optical Line Terminations for PON ports

	<= 32 PON ports			> 32 PON ports		
Power targets for Optical Line Terminations for PON ports	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)
GPON (2.5G/1G)						
OLT (GPON, fully equipped with maximum configuration implementing standard Layer-2 (Ethernet) aggregation functionalities, including Multicast)	5,0	5,0	5,0	4,5	4,5	4,0
OLT (GPON, fully equipped with maximum configuration implementing also functionalities at the IP layer such as routing, MPLS, and IP QoS, or more advanced Layer 2 functionalities such as QoS, shaping and policing)	5,5	5,5	5,5	5,0	5,0	4,5
Additional per port allowance for GPON OLT implementing network slicing , allows multiple logical networks to be created on top of a common shared physical infrastructure	1,5	1,5	1,5	1,5	1,5	1,5
Additional per port allowance for GPON OLT implementing telemetry	1,0	1,0	1,0	1,0	1,0	1,0
XG-PON1 (10G/2.5G) Note 20.1						
OLT (XG-PON1 10G/2.5G, fully equipped with maximum configuration implementing standard Layer-2 (Ethernet) aggregation functionalities, including Multicast)	10,5	9,5	9,5	8,6	7,3	6,5
OLT (XG-PON1 10G/2.5G, fully equipped with maximum configuration implementing also functionalities at the IP layer such as routing, MPLS, and IP QoS, or more advanced Layer 2 functionalities such as QoS, shaping and policing)	11,5	10,5	10,5	9,5	8,3	7,5
Additional per port allowance for XG-PON1 OLT implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)), providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements.	2,0	2,0	2,0	2,0	2,0	2,0

	<= 32 PON ports			> 32 PON ports		
Power targets for Optical Line Terminations for PON ports	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)
Additional per port allowance for XG-PON1 OLT implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for XG-PON1 OLT implementing telemetry	1,0	1,0	1,0	1,0	1,0	1,0
XGS-PON (10G/10G)						
OLT (XGS-PON 10G/10G, fully equipped with maximum configuration implementing standard Layer-2 (Ethernet) aggregation functionalities, including Multicast)	12,4	11,0	11,0	9,0	7,7	7,0
OLT (XGS-PON 10G/10G, fully equipped with maximum configuration implementing also functionalities at the IP layer such as routing, MPLS, and IP QoS, or more advanced Layer 2 functionalities such as QoS, shaping and policing)	13,3	12,0	12,0	10,0	8,7	8,0
Additional per port allowance for XGS-PON OLT implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)), providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for XGS-PON OLT implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for XGS-PON OLT implementing telemetry	1,0	1,0	1,0	1,0	1,0	1,0
XG-PON+GPON Multi-PON (10G/2.5G+2.5G/1.25G) Note 20.1						
OLT (XG-PON+GPON Multi-PON 10G/2.5G+2.5G/1.25G, fully equipped with maximum configuration implementing standard Layer-2 (Ethernet) aggregation functionalities, including Multicast)	11,9	10,5	10,5	10,0	8,0	7,5

	<= 32 PON ports			> 32 PON ports		
Power targets for Optical Line Terminations for PON ports	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)
OLT (XG-PON+GPON Multi-PON 10G/2.5G+2.5G/1.25G, fully equipped with maximum configuration implementing also functionalities at the IP layer such as routing, MPLS, and IP QoS, or more advanced Layer 2 functionalities such as QoS, shaping and policing)	12,8	11,5	11,5	10,9	9,0	8,5
Additional per port allowance for XG-PON+GPON Multi-PON OLT implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)), providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for XG-PON+GPON Multi-PON OLT implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for XG-PON+GPON Multi-PON OLT implementing telemetry	1,0	1,0	1,0	1,0	1,0	1,0
XGS-PON+GPON Multi-PON (10G/10G+2.5G/1.25G) Note 20.1						
OLT (XGS-PON+GPON Multi-PON 10G/10G+2.5G/1.25G, fully equipped with maximum configuration implementing standard Layer-2 (Ethernet) aggregation functionalities, including Multicast)	13,8	12,0	12,0	10,5	8,5	8,0
OLT (XGS-PON+GPON Multi-PON 10G/10G+2.5G/1.25G, fully equipped with maximum configuration implementing also functionalities at the IP layer such as routing, MPLS, and IP QoS, or more advanced Layer 2 functionalities such as QoS, shaping and policing)	14,7	13,0	13,0	11,5	9,5	9,0
Additional per port allowance for XGS-PON+GPON Multi-PON OLT implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)), providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements	2,0	2,0	2,0	2,0	2,0	2,0

	<= 32 PON ports			> 32 PON ports		
Power targets for Optical Line Terminations for PON ports	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)
Additional per port allowance for XGS-PON+GPON Multi-PON OLT implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for XGS-PON+GPON Multi-PON OLT implementing telemetry	1,0	1,0	1,0	1,0	1,0	1,0
NG-PON2 (10G/2.5G per Lambda)						
OLT (NG-PON2 10G/2.5G per lambda, fully equipped with maximum configuration implementing standard Layer-2 (Ethernet) aggregation functionalities, including Multicast)	12,4	12,4	12,4	9,7	9,7	9,7
OLT (NG-PON2 10G/2.5G per lambda, fully equipped with maximum configuration implementing also functionalities at the IP layer such as routing, MPLS, and IP QoS, or more advanced Layer 2 functionalities such as QoS, shaping and policing)	13,3	13,3	13,3	10,6	10,6	10,6
Additional per port allowance for NG-PON2 (10G/2.5G per Lambda) OLT implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)), providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for NG-PON2 (10G/2.5G per Lambda) OLT implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for NG-PON2 (10G/2.5G per Lambda) OLT implementing telemetry	1,0	1,0	1,0	1,0	1,0	1,0
NG-PON2 (10G/10G per Lambda)						
OLT (NG-PON2 10G/10G per lambda, fully equipped with maximum configuration implementing standard Layer-2 (Ethernet) aggregation functionalities, including Multicast)	14,0	14,0	14,0	10,5	10,5	10,5

	<= 32 PON ports			> 32 PON ports		
Power targets for Optical Line Terminations for PON ports	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)
OLT (NG-PON2 10G/10G per lambda, fully equipped with maximum configuration implementing also functionalities at the IP layer such as routing, MPLS, and IP QoS, or more advanced Layer 2 functionalities such as QoS, shaping, policing)	15,0	15,0	15,0	11,5	11,5	11,5
Additional per port allowance for NG-PON2 (10G/10G per Lambda) OLT implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)), providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for NG-PON2 (10G/10G per Lambda) OLT implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for NG-PON2 (10G/10G per Lambda) OLT implementing telemetry	1,0	1,0	1,0	1,0	1,0	1,0
NG-PON2 (40G/10G)						
Targets to be defined in CoC v9.		N/A	N/A		N/A	N/A
EPON (1G/1G)						
OLT (1G-EPON, fully equipped with maximum configuration implementing standard Layer-2 (Ethernet) aggregation functionalities, including Multicast)	5,0	5,0	5,0	4,5	4,5	4,5
OLT (1G-EPON, fully equipped with maximum configuration implementing also functionalities at the IP layer such as routing, MPLS, and IP QoS, or more advanced Layer 2 functionalities such as QoS, shaping and policing)	5,5	5,5	5,5	5,0	5,0	5,0
Additional per port allowance for EPON OLT implementing network slicing , allows multiple logical networks to be created on top of a common shared physical infrastructure	1,5	1,5	1,5	1,5	1,5	1,5
Additional per port allowance for EPON OLT implementing telemetry	1,0	1,0	1,0	1,0	1,0	1,0

	<= 32 PON ports			> 32 PON ports		
Power targets for Optical Line Terminations for PON ports	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)
10G/1G EPON Note 20.1						
OLT (10/1G-EPON, fully equipped with maximum configuration implementing standard Layer-2 (Ethernet) aggregation functionalities, including Multicast)	10,5	10,5	10,5	8,6	8,6	8,6
OLT (10/1G-EPON, fully equipped with maximum configuration implementing also functionalities at the IP layer such as routing, MPLS, and IP QoS, or more advanced Layer 2 functionality such as QoS, shaping and policing)	11,4	11,4	11,4	9,5	9,5	9,5
Additional per port allowance for 10/1G EPON OLT implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)), providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for 10/1G EPON OLT implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for 10/1G EPON OLT implementing telemetry	1,0	1,0	1,0	1,0	1,0	1,0
10G/10G EPON Note 20.1						
OLT (10/10G-EPON, fully equipped with maximum configuration implementing standard Layer-2 (Ethernet) aggregation functionalities, including Multicast)	12,4	12,4	12,4	9,5	9,5	9,5
OLT (10/10G-EPON, fully equipped with maximum configuration implementing also functionalities at the IP layer such as routing, MPLS, and IP QoS, or more advanced Layer 2 functionalities such as QoS, shaping and policing)	13,3	13,3	13,3	10,5	10,5	10,5

	<= 32 PON ports			> 32 PON ports		
Power targets for Optical Line Terminations for PON ports	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)	Tier 2021 (1.1.2021)- (31.12.2021) (W)	Tier 2022 (1.1.2022)- (31.12.2022) (W)	Tier 2023 (1.1.2023)- (31.12.2023) (W)
Additional per port allowance for 10G/10G EPON OLT implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)), providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for 10/10G EPON OLT implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	2,0	2,0	2,0	2,0	2,0	2,0
Additional per port allowance for 10/10G EPON OLT implementing telemetry	1,0	1,0	1,0	1,0	1,0	1,0

Source: JRC, 2021

Notes:

- (20.1) The state of maturity of this technology is such that power targets can only apply to OLTs with the fiber technology implemented in ASIC. Signatories must report the power consumptions values of any OLT equipment that they manufacture or deploy, so that the state of development of this technology can be taken into account when revising these targets in the future. For OLTs with the fiber technology not implemented in ASIC, such report will not be included in the assessment of whether or not the 90% target has been achieved.
- (20.2) Additional per port allowance implementing network slicing: The Network Slicing feature enabling strict separation of resource of the different slices requires more energy since a set of new functions are added in the hardware including per slice DBA scheduling, increased buffers for fulfilling a variety of SLAs, low latency support on the packet path, increased number of tables and increased table size, and more complex scheduling for priority and low delay.
- (20.3) Additional per port allowance implementing fine-granular telemetry: Fine granular telemetry requires more energy since the granularity in terms of number of counters is increased and the frequency to read-out the counters is increased, with that also the amount of data to be transported is higher and uses more energy. That results in larger chipsets and more computation on a per user and service level.

Table 21: Optical Line Terminations for PtP ports

Power targets for Optical Line Terminations for PtP ports	Tier 2021 (1.1.2021-31.12.2021) (W)	Tier 2022 (1.1.2022-31.12.2022) (W)	Tier 2023 (1.1.2023-31.12.2023) (W)
PtP 1000Mbps			
OLT (PtP up to 1000 Mbit/s, up to 100 ports, fully equipped with maximum configuration)	2,8	2,5	2,5
OLT (PtP up to 1000 Mbit/s, from 100 and 300 ports, fully equipped with maximum configuration)	2,4	2,4	2,4
OLT (PtP up to 1000 Mbit/s, with more than 300 ports, fully equipped with maximum configuration)	1,7	1,7	1,7
Additional per port allowance , implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)), providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements	0,3	0,3	0,3
Additional per port allowance, implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	0,5	0,5	0,5
Additional per port allowance, implementing telemetry	0,2	0,2	0,2
PtP 10Gbps			
OLT (PtP at 10 Gbit/s, up to 16 ports, fully equipped with maximum configuration)	18	18	18
OLT (PtP at 10 Gbit/s, from 16 to 48 ports, fully equipped with maximum configuration)	13	13	13
OLT (PtP at 10 Gbit/s, with more than 48 ports, fully equipped with maximum configuration)	8	8	8
Additional per port allowance, implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	1,5	1,5	1,5
Additional per port allowance, implementing telemetry	0,5	0,5	0,5

Power targets for Optical Line Terminations for PtP ports	Tier 2021 (1.1.2021-31.12.2021) (W)	Tier 2022 (1.1.2022-31.12.2022) (W)	Tier 2023 (1.1.2023-31.12.2023) (W)
PtP 25Gbps			
OLT (PtP at 25 Gbit/s, up to 16 ports, fully equipped with maximum configuration)	28,0	28,0	28,0
OLT (PtP at 25 Gbit/s, from 16 to 32 ports, fully equipped with maximum configuration)	23,0	23,0	23,0
OLT (PtP at 25 Gbit/s, with more than 32 ports, fully equipped with maximum configuration)	20,0	20,0	20,0
Additional per port allowance, implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)), providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements	2,0	2,0	2,0
Additional per port allowance, implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure	3,0	3,0	3,0
Additional per port allowance, implementing telemetry	0,5	0,5	0,5
PtP 40Gbps			
Targets to be defined in CoC v8.	N/A	N/A	N/A
PtP 100Gbps			
OLT (PtP at 10 Gbit/s, up to 8 ports, fully equipped with maximum configuration)	150,0	150,0	150,0
OLT (PtP at 10 Gbit/s, from 8 to 16 ports, fully equipped with maximum configuration)	130,0	130,0	130,0
OLT (PtP at 10 Gbit/s, with more than 16 ports, fully equipped with maximum configuration)	120,0	120,0	120,0
Additional per port allowance , implementing Layer 3 functionalities of Edge Router (at least IP/MPLS routing and interface and policy based hierarchical QoS (H-QoS)),	5,0	5,0	5,0

Power targets for Optical Line Terminations for PtP ports	Tier 2021 (1.1.2021-31.12.2021) (W)	Tier 2022 (1.1.2022-31.12.2022) (W)	Tier 2023 (1.1.2023-31.12.2023) (W)
providing extendable capability to evolve adding new functionalities currently under discussion, and variable traffic processing functions and/or market specific customization requirements			
Additional per port allowance, implementing network slicing, allows multiple logical networks to be created on top of a common shared physical infrastructure.	4,0	4,0	4,0
Additional per port allowance, implementing telemetry.	1,0	1,0	1,0

Source: JRC, 2021

The above values are for fully equipped with maximum configuration OLTs.

An additional allowance for each uplink interface is available from Table 18b:

The above consumption for GPON, XG-PON1 and EPON OLT is per port whatever the number of ONU connected to it is. The above consumption for GPON OLT is with Class B+ (ITU-T G.984.2 amd1) optical modules.

The above consumption for PtP OLT is per user port. The optical budget for the OLT P2P interfaces shall be in line with IEEE 802.3, Clause 58 for the 100BASE-LX10 and 100BASE-BX10 interfaces and IEEE 802.3, Clause 59 for the 1000BASE-LX10 and 1000BASE-BX10 interfaces. The PtP 10 Gbit/s limits are applicable only to PtP links operating at 10 Gbit/s, fully equipped with maximum configuration that directly connect to CPE associated with broadband distribution for residential customers and SOHO.

The above power consumption for EPON OLT is per port and with PRX30 class for 10G/1G-EPON OLT, PR30 class for 10G/10G-EPON and PR30 class for 1G-EPON [11].

C.2.4 Wireless Broadband network equipment

Table 22: Wi-Fi network equipment

Power targets for Wi-Fi network equipment	Tier 2021 (1.1.2021-31.12.2021) (W)	Tier 2022 (1.1.2022-31.12.2022) (W)	Tier 2023 (1.1.2023-31.12.2023) (W)
Wi-Fi access points (Hotspot application) 802.11b/g/n or 802.11b/g/a – ON state and Active Standby Note 22.1	8	8	8

Source: JRC, 2021

Notes:

(22.1) The On-state is defined with no traffic on the Wi-Fi port. Therefore there is no difference in power consumption between the On-state and the Low-load-state (Active Standby) for this equipment.

Table 23: Table deleted

This table has been removed from version 7 onwards. The reference has not been deleted to maintain the list of references consistent across versions.

Definition of Idle-State for RAN Radio Base Station

Port / Component	Idle-State
Radio Base Station GSM/WCDMA/LTE	In Idle-State, there is no transmission of data traffic (no payload data), only transmission of information and synchronization signaling for maintaining the cell coverage and cell availability.

Source: JRC, 2021

Definition of On-State (Active-State) for RAN Radio Base Station

Port / Component	On-State (Active-State)
Radio Base Station GSM/WCDMA/LTE	In Active-State, data traffic is established between radio access network and the user equipment in form of transmitting or receiving payload data.

Source: JRC, 2021

Table 24: GSM/EDGE network equipment

Power targets for GSM/EDGE network equipment	Tier 2021 (1.1.2021- 31.12.2021) (W)	Tier 2022 (1.1.2022- 31.12.2022) (W)	Tier 2023 (1.1.2023- 31.12.2023) (W)
	0,9/1,8/1,9 GHz	0,9/1,8/1,9 GHz	0,9/1,8/1,9 GHz
80W <= Nominal output power of Radio Unit <= 200W			
GSM/EDGE Radio Base Station – Busy-hour-load-state	855	855	tbd
GSM/EDGE Radio Base Station – Medium-load-state	700	700	tbd
GSM/EDGE Radio Base Station – Low-load-state	585	585	tbd
200W < Nominal output power of Radio Unit <= 500W			
GSM/EDGE Radio Base Station – Busy-hour-load-state	960	960	tbd
GSM/EDGE Radio Base Station – Medium-load-state	780	780	tbd
GSM/EDGE Radio Base Station – Low-load-state	655	655	tbd

Source: JRC, 2021

Notes:

- (24.1) Three sectors, four carriers per sector (S444). Nominal output power of Radio Unit: see table above.
 (24.2) Output power: 20W at antenna interface for each carrier (4 × 20W for each sector).

For GSM/EDGE Radio base station the busy hour load, medium load and low load states defined in ETSI ES 202 706-1 v.1.6.1 [9] shall be used.

Table 25: WCDMA/HSDPA network equipment

Power targets for WCDMA/HSDPA network equipment	Tier 2021 (1.1.2021–31.12.2021) (W)	Tier 2022 (1.1.2022–31.12.2022) (W)	Tier 2023 (1.1.2023–31.12.2023) (W)
	2,1 GHz	2,1 GHz	2,1 GHz
Nominal output power of Radio Unit ≤ 80W			
WCDMA/HSDPA Radio Base Station – Busy-hour-load-state	725	650	tbd
WCDMA/HSDPA Radio Base Station – Medium-load-state	600	540	tbd
WCDMA/HSDPA Radio Base Station – Low-load-state	505	455	tbd
80W < Nominal output power of Radio Unit ≤ 200W			
WCDMA/HSDPA Radio Base Station – Busy-hour-load-state	795	715	tbd
WCDMA/HSDPA Radio Base Station – Medium-load-state	660	595	tbd
WCDMA/HSDPA Radio Base Station – Low-load-state	555	500	tbd
200W < Nominal output power of Radio Unit ≤ 500W			
WCDMA/HSDPA Radio Base Station – Busy-hour-load-state	890	800	tbd
WCDMA/HSDPA Radio Base Station – Medium-load-state	740	665	tbd
WCDMA/HSDPA Radio Base Station – Low-load-state	620	560	tbd

Source: JRC, 2021

Notes:

- (25.1) Three sectors, two carriers per sector (S222). Nominal output power of Radio Unit: see above table.
 (25.2) Output power: 20W at antenna interface for each radio cell (20W+ 20W for each sector).

For WCDMA/HSDPA Radio base station the state definitions in ETSI ES 202 706-1 v.1.6.1 [9] shall be used.

Table 26: Wireless broadband network equipment – LTE

Power targets for LTE wireless broadband network equipment	Tier 2021 (1.1.2021-31.12.2021) (W)	Tier 2022 (1.1.2022-31.12.2022) (W)	Tier 2023 (1.1.2023-31.12.2023) (W)
	0,8/1,8/2,6 GHz	0,8/1,8/2,6 GHz	0,8/1,8/2,6 GHz
Nominal output power of Radio Unit <= 80W			
LTE Radio Base Station – Busy-hour-load-state	790	710	tbd
LTE Radio Base Station – Medium-load-state	660	595	tbd
LTE Radio Base Station – Low-load-state	565	510	tbd
80W < Nominal output power of Radio Unit <= 200W			
LTE Radio Base Station – Busy-hour-load-state	870	780	tbd
LTE Radio Base Station – Medium-load-state	725	650	tbd
LTE Radio Base Station – Low-load-state	620	560	tbd
200W < Nominal output power of Radio Unit <= 500W			
LTE Radio Base Station – Busy-hour-load-state	975	880	tbd
LTE Radio Base Station – Medium-load-state	810	730	tbd
LTE Radio Base Station – Low-load-state	695	625	tbd

Source: JRC, 2021

Configuration of LTE Radio Base Station:

- 1) 3 sectors, 10 MHz bandwidth channel 2 × 2MIMO. Nominal output power of Radio Unit: see table above.
- 2) Output power: 40W (20W × 2) at antenna interface for each sector.

For LTE Radio base station the state definitions in ETSI ES 202 706-1 v.1.6.1 [9] shall be used.

C.2.5 Cable Network Equipment

Cable network system vendors developed the Converged Cable Access Platform (CCAP) a number of years ago which incorporates multiple headend functionalities into a single piece of equipment. Suitable power metrics and targets for this equipment are now included in the Code of Conduct replacing I-CMTS and M-CMTS equipment going forward.

Most current CCAP installations are located in the headend in a single chassis and are referred to as Integrated CCAP (I-CCAP). There has been recent strong interest in Distributed CCAP Architectures (DCA) where some or all of the CCAP functionality is pushed to a remote location including the outside plant in the field.

The first DCA system from CableLabs to be included in the Code of Conduct is the Remote PHY (R-PHY) system that consists of a R-PHY device (RPD) located either in a node or shelf product; and a CCAP core chassis or server located in the headend or data center. The RPD performs the DOCSIS PHY layer processing while the

CCAP core handles the DOCSIS MAC and upper layer CCAP protocols. The RPD plus CCAP core are functionally equivalent to I-CCAP. Some additional Ethernet aggregation switching may be needed in a DCA system.

The CableLabs Flexible MAC Architecture (FMA) working group is in the process of defining several other variants of DCA including interfaces for various Remote MAC-PHY (R-MACPHY) systems. Much new product development is happening in this area. The first DCA system from FMA to be included in the Code of Conduct is the R-MACPHY system that consists of a R-MACPHY device (RMD) located either in a node or shelf product; along with some core functions located in the headend or data center. The RMD performs the DOCSIS MAC and PHY layer processing. Additional processing may still be necessary in the headend or data center to provide full CCAP functionality. This may include routers, ethernet switches, MAC manager and a video processing core. These collectively will be referred to as RMD core components.

Table 27: Table deleted

This table has been removed from version 7 onwards. The reference has not been deleted to maintain the list of references consistent across versions.

C.2.5.1 CCAP Power Consumption Metrics

The two metrics below are to be used to evaluate the power consumption characteristics of CCAP equipment, both I-CCAP and DCA system implementations. It is important to note that evaluation and consideration of both metrics is required in order to ensure a comprehensive understanding of these characteristics.

C.2.5.1.1 CCAP Power Consumption per Service Group

The *CCAP power consumption per Service Group* shall be determined with the metric specified in [24] – section 8.2.1.

C.2.5.1.2 CCAP Power Consumption per Throughput

The *CCAP power consumption per Throughput* shall be determined as specified in [24] – section 8.2.2. This is the power per combined DSSG + USSGs throughput across all composite SGs.

C.2.5.1.3 CCAP Power Consumption – Configuration

The configuration and test procedures specified in [24] – sections 10.1, 10.2, 10.3, 10.5, and 10.8 (and their subsections) shall be applied in the evaluation of the I-CCAP and DCA power consumption metrics. The general testing standards and configuration specified in [23] shall also be applied. Note that configuration includes redundancy if supported by the I-CCAP equipment under test per [24] – section 10.2.

C.2.5.2 I-CCAP Power Consumption – Allowances

Table 28: I-CCAP Power Consumption per Service Group

Power targets for I-CCAP equipment	Scenario C (2021) 1 DSSG, 1-2 USSGs per composite SG (Watts / SG)	Scenario C (2022) 1 DSSG, 1-2 USSGs per composite SG (Watts / SG)	Scenario C (2023) 1 DSSG, 1-2 USSGs per composite SG (Watts / SG)
I-CCAP Power per SG: 1x2	115	100	100
I-CCAP Power per SG: 1x1	92	80	80

Source: JRC, 2021

Table 29: I-CCAP Power Consumption per Throughput

Power targets for I-CCAP equipment	Scenario C (2021) 1 DSSG, 1-2 USSGs per composite SG (Watts / Gbps)	Scenario C (2022) 1 DSSG, 1-2 USSGs per composite SG (Watts / Gbps)	Scenario C (2023) 1 DSSG, 1-2 USSGs per composite SG (Watts / Gbps)
I-CCAP Power per Throughput: 1x2	50	40	32
I-CCAP Power per Throughput: 1x1	50	40	32

Source: JRC, 2021

C.2.5.3 DCA Power Consumption – Allowances**Table 30:** DCA Power Consumption per composite SG

Power targets for DCA equipment	Scenario C (2021) 1 DSSG, 1-2 USSGs per composite SG (Watts / SG)	Scenario C (2022) 1 DSSG, 1-2 USSGs per composite SG (Watts / SG)	Scenario C (2023) 1 DSSG, 1-2 USSGs per composite SG (Watts / SG)
RPD Module Power per SG: 1x2	86	74	64
RPD Module Power per SG: 1x1	78	67	58
CCAP Core: 1x2	43	37	32
CCAP Core: 1x1	43	37	32
RMD Module Power per SG: 1x2	100	86	72
RMD Module Power per SG: 1x1	90	78	64
RMD Core components	TBD	TBD	TBD

Source: JRC, 2021

Table 31: DCA Power Consumption per Throughput

Power targets for DCA equipment	Scenario C (2021) 1 DSSG, 1-2 USSGs per composite SG (Watts / Gbps)	Scenario C (2022) 1 DSSG, 1-2 USSGs per composite SG (Watts / Gbps)	Scenario C (2023) 1 DSSG, 1-2 USSGs per composite SG (Watts / Gbps)
RPD Power per Throughput: 1x2	13	11	9
RPD Power per Throughput: 1x1	13	11	9
CCAP Core Power per Throughput: 1x2	14	12	10

Power targets for DCA equipment	Scenario C (2021) 1 DSSG, 1-2 USSGs per composite SG (Watts / Gbps)	Scenario C (2022) 1 DSSG, 1-2 USSGs per composite SG (Watts / Gbps)	Scenario C (2023) 1 DSSG, 1-2 USSGs per composite SG (Watts / Gbps)
CCAP Core Power per Throughput: 1x1	14	12	10
RMD Power per Throughput: 1x2	15	13	11
RMD Power per Throughput: 1x1	15	13	11
RMD Core Power per Throughput	TBD	TBD	TBD

Source: JRC, 2021

C.2.5.4 Other Cable Network Equipment

Allowances for older legacy cable network equipment such as I-CMTS, M-CMTS and Edge QAM devices are specified in the earlier version of Code of Conduct V6.

D. Example Home Gateway Power Consumption Targets

The home gateway power consumption targets are computed from the components according to the configuration (profile) of the home gateway. Some example profiles are provided below. Home gateways having these exact configurations must meet these power targets, and by using this approach it is possible to create the targets that must be met for a home gateway of arbitrary functionality.

D.1 ADSL Home Gateway

ADSL home gateway with 4 Fast Ethernet LAN ports, a single radio IEEE 802.11g Wi-Fi interface and 2 USB 2.0 ports:

- in idle-state: all Ethernet LAN ports disconnected, no traffic on Wi-Fi
- in on-state: all Ethernet LAN ports active, traffic on Wi-Fi

Table 32: ADSL Home Gateway Example

Function	idle-state		on-state	
	2021	2022	2020	2021
Central functions + ADSL WAN interface	2,0	2,0	2,4	2,1
4 Fast Ethernet LAN ports	$4 \times 0,2 = 0,8$	$4 \times 0,2 = 0,8$	$4 \times 0,3 = 1,2$	$4 \times 0,2 = 0,8$
single radio IEEE 802.11g Wi-Fi interface (23 dBm EIRP)	0,7	0,7	1,1	1,0
USB 2.0 ports	$2 \times 0,1 = 0,2$	$2 \times 0,1 = 0,2$	$2 \times 0,1 = 0,2$	$2 \times 0,1 = 0,2$
Total equipment	3,7W	3,7W	4,9W	4,1W

Source: JRC, 2021

D.2 VDSL2 Home Gateway

VDSL2 home gateway with 4 Gigabit Ethernet LAN ports, a single radio 802.11n Wi-Fi interface, 2 USB 2.0 ports and 2 FXS ports:

- in idle-state: all Ethernet LAN ports disconnected, no traffic on Wi-Fi, no voice call
- in on-state: all Ethernet LAN ports active, traffic on Wi-Fi, 1 active voice call (the second FXS port has no device connected and for this port the idle target needs to be considered)

Table 33: VDSL2 Home Gateway Example

Function	idle-state		on-state	
	2021	2022	2021	2022
Central functions + VDSL2 WAN interface (17a)	3,0	3,0	3,7	3,5
4 Gigabit Eth. LAN ports	$4 \times 0,2 = 0,8$	$4 \times 0,2 = 0,8$	$4 \times 0,4 = 1,6$	$4 \times 0,3 = 1,2$
single IEEE 802.11n radio Wi-Fi interface with 3 RF chains 3x3 MIMO (23 dBm)	$0,8+0,1 = 0,9$	$0,8+0,1 = 0,9$	$1,6+0,3 = 2,1$	$1,4+0,2 = 1,6$
USB 2.0 ports	$2 \times 0,1 = 0,2$	$2 \times 0,1 = 0,2$	$2 \times 0,1 = 0,2$	$2 \times 0,1 = 0,2$
FXS ports	$2 \times 0,2 = 0,4$	$2 \times 0,2 = 0,4$	$0,9+0,2 = 1,1$	$0,8+0,2 = 1,0$
Total equipment	5,3W	5,3W	8,5W	7,3W

Source: JRC, 2021

D.3 Ethernet router with 4 Fast Ethernet LAN ports

Fast Ethernet router with 1 WAN and 4 LAN Ethernet ports:

Table 34: Ethernet router with 4 Fast Ethernet LAN ports Example

Function	idle-state		on-state	
	2021	2022	2021	2022
Central functions + Fast Ethernet WAN interface	1,4	1,4	1,7	1,7
4 Fast Ethernet LAN ports	$4 \times 0,2 = 0,8$	$4 \times 0,2 = 0,8$	$4 \times 0,3 = 1,2$	$4 \times 0,2 = 0,8$
Total equipment	2,2W	2,2W	2,9W	2,5W

Source: JRC, 2021

D.4 Cable DOCSIS 3.0 CPE

DOCSIS 3.0 CPE in 32x4 configuration with 1 Gigabit Ethernet LAN port:

Table 35: Cable DOCSIS 3.0 CPE Example

Function	idle-state		on-state	
	2021	2022	2021	2022
Central functions + DOCSIS 3.0 basic configuration WAN interface	5,0	5,0	5,5	5,5
1 DOCSIS 3.0 Additional power allowance for the additional 28 downstream channels	$1,2 \times 7 = 8,4$	$1,2 \times 7 = 8,4$	$1,8 \times 7 = 12,6$	$1,8 \times 7 = 12,6$
1 Gigabit Ethernet LAN port	0,2	0,2	0,4	0,3
Total equipment	13,6W	13,6W	18,5W	18,4W

Source: JRC, 2021

D.5 Complex HNID

Dual-band 11n access point with 4 Gigabit Ethernet LAN ports:

Table 36: Complex HNID Example

Function	idle-state		on-state	
	2021	2022	2021	2022
Wi-Fi Access Points with single band IEEE 802.11n radio (23 dBm), 2x2 MIMO	1,9	1,9	2,7	2,5
single IEEE 802.11n radio Wi-Fi interface (23 dBm), 2x2 MIMO	0,8	0,8	1,6	1,4
3 additional Gigabit Ethernet LAN ports	$3 \times 0,2 = 0,6$	$3 \times 0,2 = 0,6$	$3 \times 0,4 = 1,2$	$3 \times 0,3 = 0,8$
Total equipment	3,3W	3,3W	5,5W	4,7W

Source: JRC, 2021

E. Reporting Form

See Reporting Sheet on the homepage of the EU Standby Initiative [3].

The reporting spreadsheet should be filled in on the basis of equipment capability, in particular the actual number of ports on cards or chassis should be entered, regardless of any design or regulatory constraints which may result in the suboptimal use of those cards.

For Network Operators, the tier to be used for compliance purposes should be that pertaining to the year when equipment of a given type was ordered for the first time.

F. Test methods

F.1 Customer premises equipment

Customer premises equipment with an external power supply shall be measured 230V AC input in all states (when existing) as they are described in section B.1. In the future, standardization bodies like ETSI could provide a more detailed specification for the measurement of the power consumption in different states.

F.2 Network equipment

The values given in section C.2 are indicating the averaged power consumption per port for a fully equipped system as delivered by the manufacturer.

Systems powered by DC voltage shall comply with the standard ETSI EN 300 132-2 [7].

The method of power measurement of equipment in line with point C.2.1, C.2.2 and C.2.3 shall comply with the Technical Specification ETSI EN 303 215 [15]. The method of power measurement for equipment in line with point C.2.4 shall comply with the Technical Specification ETSI TS 202 706-1 v1.5.1 static mode [9].

In case of systems powered directly by AC mains voltage, the power consumption will have to be measured at the AC input. For AC mains powered systems, the power limits stated in Table 16 through Table 26 are increased by 10%. In case of integrated remote or reverse powered systems, the power limits stated are increased by 15% for remote and reverse powered systems.

The power limits have to be fulfilled for the system operating at ambient temperature ($25 \pm 2^\circ \text{C}$). Fans, if present in network equipment in line with points C.2.1 and C.2.2, have to be set at maximum speed.

Note: for both Customer premises and network equipment the xDSL test conditions under which energy consumption is measured should be representative of the scenario(s) under which network equipment or CPE is to be deployed (e.g., selection of band plan for VDSL2). The Broadband Forum and ETSI EE provide xDSL test plans, which may be used prior to the general availability of a unified test methodology which is fully compatible with the Code of Conduct.

In the spirit of industry harmonization, ETSI EE and the Broadband Forum will collaborate on the review/definition of the Broadband Energy efficiency measurement methods standards and test plans for xDSL CPE and network equipment published by ETSI with the aim of making joint recommendations for the next revision of the Code of Conduct.

G. Evolution of power saving for broadband equipment

The volume of deployed broadband equipment is increasing dramatically and so does its combined power consumption. Due to low customer aggregation ratios (typically, one CPE per customer), such equipment is typically idle most of the time, most of the time exchanging data only to maintain its network status. It is therefore evident that such equipment can be optimized in terms of its power consumption and activity profiles. Examples of such techniques include dynamic adaptation (e.g., performance scaling), smart standby (e.g., through proxying network presence and virtualization of functions) and energy aware management. The following list gives an overview of some of available optimization techniques.

- Energy Efficient Ethernet (EEE) as defined in IEEE Std 802.3-2012 SECTION SIX – wired copper Ethernet interfaces on CPEs have the ability to operate at a data rate lower than their nominal data rate, reducing power consumption of the interface as a whole. Different port-type-specific signalling mechanisms are used in EEE, including Low Power Idle. To take the full advantage of the EEE potential, both link peers must support EEE.
- Network Proxying defined by the ECMA task group under the work programme of TC38-TG4 - Proxying Support for Sleep Modes. The work is focused on providing support for the Network Proxy function for various types of broadband equipment, including VoIP phones. A proxy in this context is an entity that maintains network presence for a sleeping higher-power broadband device. A VoIP phone remains idle most of the time. VoIP phones cannot be put into a full standby mode, since they are required to maintain network presence through persistent data connectivity. Through proxying, another entity within the broadband network can assure such persistent data connectivity on behalf of a VoIP phone and wake it up when required. In this way, a device can enter a full standby mode, without any adverse effects on associated communication protocols.
- Energy aware management IETF EMAN. Provides a framework for Energy Management for devices within or connected to communication networks, and components thereof. It defines an Energy Management Domain as a set of Energy Objects, for which each Energy Object is identified, classified and given context. Energy Objects can be monitored and/or controlled with respect to Power, Power State, Energy, Demand, Power Quality, and battery. <https://datatracker.ietf.org/wg/eman/>
- Energy aware management within ETSI - The Green Abstraction Layer (GAL) is an architectural interface/middleware that intends to give a flexible access to the power management capabilities of the future energy aware BroadBand nodes to effectively exploit the capability of adapting their energy consumption with respect to the function (typically the traffic) variations. The GAL aims at synthesizing and at correctly exposing power management capabilities and corresponding consumption variation.

Implementing those functions in broadband equipment enhances its capabilities for power saving.

Code of Conduct On Energy Consumption of Broadband Equipment

SIGNING FORM

The organisation/company/

.....

signs the Code of Conduct on Energy Consumption of Broadband Equipment and commits itself to abide to the principles described in point 3 “Commitment” for the equipment it produces, buys, installs or specifies.

The organisation, through regular upgrade reports, will keep the European Commission informed on the implementation of the Code of Conduct of Broadband Equipment.

for the organisation

Director or person authorised to sign:

Name:

Managerial Function:

Address:

Tel. / Fax:

Email:

Date:

Signature

Please send the signed form to:

Paolo Bertoldi
European Commission - DG JRC
TP 450
I-21027 Ispra (VA)
Tel. +39 0332 78 9299
Fax +39 0332 78 9992
E-mail: paolo.bertoldi@ec.europa.eu

References

- [1] ITU-T recommendation I.113, "Vocabulary of terms for broadband aspects of ISDN"
- [2] Code of Conduct for Digital TV Services (version 9 – 01.07.2013), https://e3p.jrc.ec.europa.eu/sites/default/files/documents/publications/code_of_conduct_digital_tv_service_systems_v9_final.pdf
- [3] Reporting sheet CoC BB equipment, <https://ec.europa.eu/jrc/en/energy-efficiency/code-conduct/broadband>
- [4] EU Code of Conduct for External Power Supplies (version 5 – 31.10.2013), https://e3p.jrc.ec.europa.eu/sites/default/files/documents/publications/code_of_conduct_for_eps_version_5_-_final.pdf
- [5] ETSI Standard EN 300019-1-3 European Standard, Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-3: Classification of environmental conditions; Stationary use at weather protected locations
- [6] ETSI Standard EN 300019-1-4 European Standard, Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-4: Classification of environmental conditions; Stationary use at non-weather protected locations
- [7] ETSI EN 300 132-2 European Standard, Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc)
- [8] COMMISSION REGULATION (EC) No 1275/2008 of 17 December 2008 implementing Directive 2005/32/EC of the European Parliament and of the Council with regard to eco design requirements for standby and off mode electric power consumption of electrical and electronic household and office equipment
- [9] ETSI ES 202 706-1 v.1.6.1, "Technical Specification, Environmental Engineering (EE), Energy Efficiency of Wireless Access Network Equipment"
- [10] IEEE Std 802.3™-2012, IEEE Standard for Ethernet
- [11] IEEE P802.3bk, draft D2.0, Draft Standard for Ethernet, Amendment 2: Physical Layer Specifications and Management Parameters for Extended Ethernet Passive Optical Networks
- [12] Broadband Forum TR-100 Issue 2 (August 2012), ADSL2/ADSL2plus Performance Test Plan, http://www.broadband-forum.org/technical/download/TR-100_Issue-2.pdf
- [13] Broadband Forum TR-114 Issue 2 (November 2012), VDSL2 Performance Test Plan, http://www.broadband-forum.org/technical/download/TR-114_Issue-2.pdf
- [14] ITU-T Recommendation G.984, "Gigabit-capable passive optical networks (GPON): General characteristics"
- [15] ETSI EN 303 215 V1.3.1, "ETSI Standard, Environmental Engineering (EE); Measurement Methods and Limits for Power Consumption in Broadband Telecommunication Networks Equipment"
- [16] ITU-T Recommendation G.993.5 (2019), "Self-FEXT cancellation (vectoring) for use with VDSL2 transceivers"
- [17] ITU-T Recommendation G.993.2 (2019), "Very high speed digital subscriber line transceivers 2 (VDSL2)"
- [18] ITU-T Recommendation G.992.3, "Asymmetric digital subscriber line transceivers 2 (ADSL2)"
- [19] ITU-T Recommendation G.992.5, "Asymmetric digital subscriber line 2 transceivers (ADSL2)– Extended bandwidth ADSL2 (ADSL2plus)"
- [20] ITU-T Recommendation G.998.4 (2018), "Improved impulse noise protection for DSL transceivers"
- [21] Broadband Forum Amendment 2 to TR-114 Issue 3, VDSL2 Performance Test Plan.
- [22] ITU-T Recommendation G.9701 (2019), "Fast Access to Subscriber Terminals (FAST) – Physical layer specification"
- [23] SCTE 231 2019, "General Test Procedures for Evaluation of Energy Efficiency Metrics and in Support of Functional Density Metrics"

- [24] SCTE 232 2019, "Key Performance Metrics: Energy Efficiency & Functional Density of CMTS, CCAP, and Time Server Equipment"
- [25] Ward Van Heddeghem, Sofie Lambert, Bart Lannoo, Didier Colle, Mario Pickavet, Piet Demeester, "Trends in worldwide ICT electricity consumption from 2007 to 2012", in Computer Communications 50 (2014) 64–76
- [26] COMMISSION NOTICE The 'Blue Guide' on the implementation of EU products rules 2016 (2016/C 272/01), Official Journal of the European Union EN C 272/1
- [27] 3GPP TS 36.211: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical channels and Modulation

List of abbreviations

1G-EPON	EPON operating at 1 Gbit/s downstream and 1Gbit/s upstream (IEEE 802.3)
10/1G-EPON	EPON operating at 10 Gbit/s downstream and 1Gbit/s upstream (IEEE 802.3)
10/10G-EPON	EPON operating at 10 Gbit/s downstream and 10Gbit/s upstream (IEEE 802.3)
ADSL	Asymmetric Digital Subscriber Line
ADSL2plus	Second generation ADSL with extended bandwidth
ATA	Analogue Terminal Adapter
CCAP	Converged Cable Access Platform
CoC	Code of Conduct
COP	Coefficient Of Performance
CPE	Customer Premises Equipment
CRC	Cyclic Redundancy Check
DCA	Distributed CCAP Architectures
DSSG	Downstream CMTS Service Group
DECT	Digital Enhanced Cordless Telecommunications
DOCSIS	Data Over Cable Service Interface Specification
DPU	Distribution Point Unit
DSL	Digital Subscriber Line
DSLAM	Digital Subscriber Line Access Multiplexer
EEE	Energy Efficient Ethernet
EIRP	Effective Isotropic Radiated Power
EPON	Ethernet Passive Optical Network, as specified by IEEE 802.3
ETSI	European Telecommunications Standards Institute
FFT	Fast Fourier Transform
FXO	Foreign eXchange Office
FXS	Foreign eXchange Station
GAP	Generic Access Profile
GPON	Gigabit Passive Optical Network
GSM/EDGE	Global System for Mobile communication/Enhanced Datarate GSM Evolution
HDMI	High-Definition Multimedia Interface
HNID	Home Network Infrastructure Devices
HPNA	Home PNA Alliance
IEEE	Institute of Electrical and Electronics Engineers
I-CMTS	Integrated Cable Modem Termination System
IP	Internet Protocol
ITU	International Telecommunication Union
LAN	Local Area Network
LT	Line Termination
LTE	Long Term Evolution

M-CMTS	includes CMTS core and EQAM (Edge Quadrature Amplitude Modulator)
MELT	Metallic Line Testing Entity
MIMO	Multiple-Input and Multiple-Output
MoCA	Multimedia over Coax Alliance
MPLS	Multiprotocol Label Switching
MSAN	Multi-Service Access Node
NAT	Network Address Translation
NT	Network Termination
OAM	Operations, Administration and Maintenance
OFDM	Orthogonal Frequency-Division Multiplexing
OLT	Optical Line Termination
ONU	Optical Network Unit
PIC	Physical Interface Cards
POF	Plastic Optical Fiber
PtP	Point-to-Point Optical Network
PLC	PowerLine Communication
PoE	Power over Ethernet
PSD	Power Spectral Density
PON	Passive Optical Network
POTS	Plain Old Telephone Service
QAM	Quadrature Amplitude Modulation
QoS	Quality of Service
RMD	Remote MAC-PHY Device
RPD	Remote PHY Device
SATA	Serial Advanced Technology Attachment
SC-QAM	Single- Carrier Quadrature Amplitude Modulation
SNR	Signal to Noise Ratio
SOHO	Small Office, Home Office
USSG	Upstream CMTS Service Group
ULE	Ultra Low Energy
USB	Universal Serial Bus
VDSL2	Very High Speed Digital Subscriber Line 2nd generation
VoIP	Voice over IP
VPN	Virtual Private Network
WAN	Wide Area Network
WCDMA/HSDPA	Wideband Code Division Multiple Access/High Speed Packet Access
Wi-Fi	Wireless Fidelity; technology using IEEE 802.11 standards
XG-PON1	10-Gigabit passive optical network

List of figures

Figure 1: Examples of configurations	4
---	---

List of tables

Table 1: CPE covered.....	4
Table 2: Network equipment covered.....	5
Table 3: Definition of the idle-state for home gateways.....	11
Table 4: Definition of the idle-state for simple broadband access devices (modems and NTs).....	12
Table 5: Definition of the idle-state for Home Network Infrastructure Devices (HNID).....	12
Table 6: Definition of the idle-state for other home network devices.....	13
Table 7: Definition of the on-state for home gateways.....	13
Table 8: Definition of the on-state for simple broadband access devices (modems and NTs).....	16
Table 9: Definition of the on-state for other home networking devices.....	16
Table 10: Power values for home gateway central functions plus WAN interface.....	18
Table 10a: Power values for home gateway additional Backup WAN interface.....	19
Table 10b: Power values for home gateway additional Simultaneous WAN interface.....	19
Table 11: Power values for home gateway LAN interfaces and additional functionality.....	20
Table 12: Power targets for simple broadband access devices (modems and NTs).....	24
Table 13: Power values for USB dongles.....	25
Table 14: Power targets for Home Network Infrastructure Devices (HNID).....	25
Table 15: Power targets for other home network devices.....	27
Table 16: DSL Broadband ports – full-load state (with service traffic on the lines as specified in Table 7)....	29
Table 16a: DSL Broadband ports – full-load state for Vectoring capable VDSL2 equipment.....	30
Table 16b: G.fast broadband ports – full-load-state (with service traffic on the lines as specified in Table 7)	30
Table 16c: Allowances for different types of powering of DPU.....	31
Table 17: Broadband ports – DSL-low-power-state.....	32
Table 17a: Broadband ports – G.fast low-power-state.....	32
Table 18: Broadband ports – DSL and G.fast standby-state.....	32
Table 18a: Broadband ports – MELT-stand-by state.....	33
Table 18b: Uplink Interfaces.....	33
Table 19: Table deleted.....	34
Table 20: Optical Line Terminations for PON ports.....	35
Table 21: Optical Line Terminations for PtP ports.....	42
Table 22: Wi-Fi network equipment.....	44
Table 23: Table deleted.....	44
Table 24: GSM/EDGE network equipment.....	45
Table 25: WCDMA/HSDPA network equipment.....	46
Table 26: Wireless broadband network equipment – LTE.....	47
Table 27: Table deleted.....	48
Table 28: I-CCAP Power Consumption per Service Group.....	48

Table 29: I-CCAP Power Consumption per Throughput.....	49
Table 30: DCA Power Consumption per composite SG	49
Table 31: DCA Power Consumption per Throughput.....	49
Table 32: ADSL Home Gateway Example.....	51
Table 33: VDSL2 Home Gateway Example.....	51
Table 34: Ethernet router with 4 Fast Ethernet LAN ports Example	52
Table 35: Cable DOCSIS 3.0 CPE Example	52
Table 36: Complex HNID Example.....	52

GETTING IN TOUCH WITH THE EU

In person

All over the European Union there are hundreds of Europe Direct information centres. You can find the address of the centre nearest you at: https://europa.eu/european-union/contact_en

On the phone or by email

Europe Direct is a service that answers your questions about the European Union. You can contact this service:

- by freephone: 00 800 6 7 8 9 10 11 (certain operators may charge for these calls),
- at the following standard number: +32 22999696, or
- by electronic mail via: https://europa.eu/european-union/contact_en

FINDING INFORMATION ABOUT THE EU

Online

Information about the European Union in all the official languages of the EU is available on the Europa website at: https://europa.eu/european-union/index_en

EU publications

You can download or order free and priced EU publications from EU Bookshop at: <https://publications.europa.eu/en/publications>. Multiple copies of free publications may be obtained by contacting Europe Direct or your local information centre (see https://europa.eu/european-union/contact_en).

The European Commission's science and knowledge service

Joint Research Centre

JRC Mission

As the science and knowledge service of the European Commission, the Joint Research Centre's mission is to support EU policies with independent evidence throughout the whole policy cycle.



EU Science Hub

ec.europa.eu/jrc



@EU_ScienceHub



EU Science Hub - Joint Research Centre



EU Science, Research and Innovation



EU Science Hub



Publications Office
of the European Union

doi:10.2760/10053

ISBN 978-92-76-40636-5