


openETCS System Architecture and Design Specification

Bernd Hekele, Uwe Steinke and Christian Stahl

September 2014

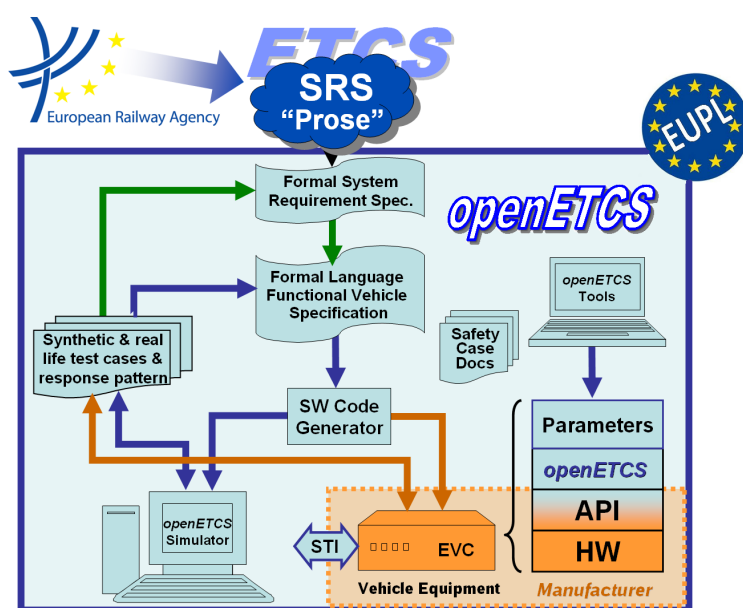

Funded by:



Federal Ministry
of Education
and Research

Région de
Bruxelles-
Capitale

GOBIERNO
DE ESPAÑA



TRIA, ENERGÍA



This page is intentionally left blank

Work-Package 3: “Modeling”

OETCS/WP3/D3.5 – 01.01
September 2014

openETCS System Architecture and Design Specification

First Iteration: ETCS Kernel Functions

Document approbation

Lead author:	Technical assessor:	Quality assessor:	Project lead:
location / date	location / date	location / date	location / date
signature	signature	signature	signature
Bernd Hekele (DB-Netz)	[assessor name] ([affiliation])	Izaskun de la Torre (SQS)	Klaus-Rüdiger Hase (DB Netz)

Bernd Hekele

DB-Netz AG, Peter Mahlmann, Peyman Farhangi
Völckerstrasse 5
D-80959 München Freimann, Germany

Uwe Steinke

Siemens AG

Christian Stahl

TWT-GmbH

Description of work

Prepared for openETCS@ITEA2 Project

Abstract: This document gives an introduction to the architecture of the first openETCS iteration, the openETCS kernel functions. It has to be read as an add-on to the models in SysML, Scade and to additional reading referenced from the document.

Disclaimer: This work is licensed under the "openETCS Open License Terms" (oOLT) dual Licensing: European Union Public Licence (EUPL v.1.1+) AND Creative Commons Attribution-ShareAlike 3.0 – (cc by-sa 3.0)

THE WORK IS PROVIDED UNDER openETCS OPEN LICENSE TERMS (oOLT) WHICH IS A DUAL LICENSE AGREEMENT INCLUDING THE TERMS OF THE EUROPEAN UNION PUBLIC LICENSE (VERSION 1.1 OR ANY LATER VERSION) AND THE TERMS OF THE CREATIVE COMMONS PUBLIC LICENSE ("CCPL"). THE WORK IS PROTECTED BY COPYRIGHT AND/OR OTHER APPLICABLE LAW. ANY USE OF THE WORK OTHER THAN AS AUTHORIZED UNDER THIS OLT LICENSE OR COPYRIGHT LAW IS PROHIBITED.

BY EXERCISING ANY RIGHTS TO THE WORK PROVIDED HERE, YOU ACCEPT AND AGREE TO BE BOUND BY THE TERMS OF THIS LICENSE. TO THE EXTENT THIS LICENSE MAY BE CONSIDERED TO BE A CONTRACT, THE LICENSOR GRANTS YOU THE RIGHTS CONTAINED HERE IN CONSIDERATION OF YOUR ACCEPTANCE OF SUCH TERMS AND CONDITIONS.

<http://creativecommons.org/licenses/by-sa/3.0/>
<http://joinup.ec.europa.eu/software/page/eupl/licence-eupl>

Modification History

Version	Section	Modification / Description	Author
0.1	Document	Initial document providing the structure	Bernd Hekele
0.2	Sect. 3.4.2	initial contribution and some pretty printing	Christian Stahl

Table of Contents

Modification History.....	3
1 Introduction.....	6
1.1 Motivation	6
1.2 Objectives	6
1.3 History	6
1.4 Goals of the openETCS Modelling Work	6
1.5 Glossary and Abbreviations	7
1.6 References.....	8
2 The openETCS Architecture of the initial kernel functions	8
2.1 The openETCS Tool-Chain and its impacts on the actual model.....	8
3 Functions of the openETCS Model.....	9
3.1 openETCS Data Dictionary	9
3.2 openETCS Generic API	9
3.3 openETCS Balise Group	9
3.4 openETCS Train Position.....	10
References	13
References	14

Figures and Tables

Figures

Figure 1. Structure of calculateTrainPosition 11

Tables

1 Introduction

1.1 Motivation

The openETCS work package WP3 aims to provide the architecture and the design of the openETCS OBU software as mainly specified in UNISIG Subset_026 version_3.3.0.

The appropriate functionality has been divided into a list of functions of different complexity (see https://github.com/openETCS/SRS-Analysis/blob/master/SystemAnalysis/List_Functions.xlsx).

All these functions are object of the openETCS project and have to be analysed from their requirements and subsequently modelled and implemented. With limited manpower, a reasonable selection and order of these functions is required for the practical work that allows the distribution of the workload, more openETCS participants to join and leads to an executable—limited—kernel function as soon as possible.

While the first version of this document focuses on the first version of the limited kernel function, it is intended to grow in parallel to the growing openETCS software.

1.2 Objectives

The first objective of WP3 software shall be

- “Make the train run as soon as possible, with a very minimum functionality, and in the form of a rapid prototype.”

This does not contradict the openETCS goal to conform to EN50128.

- After a phase of prototyping, the openETCS software shall be implemented in compliance to EN50128 for SIL4 systems.

Additional goals for this document are

- Identification of the functions required for a minimum OBU kernel
- Architecture overview regarding the minimum OBU kernel
- Technical approach: Description of the proceeding and methods to be used
- Road map of the minimum OBU kernel functions
- Road map thereafter

Note: This document will be extended according to the progress of WP3.

1.3 History

1.4 Goals of the openETCS Modelling Work

1.4.1 Functional Scope: The Minimum OBU Kernel Function

The objective “Make the train run with a very minimum functionality” shall be in terms of ETCS OBU translated into

- The Train moves on a track equipped with balises and determines its position.

That means, for this very first step, the train shall not supervise the maximum speed nor activate the brakes. Instead, the minimum function set shall be limited to (see <https://github.com/openETCS/SRS-Analysis/issues/9>)

- Receive, filter and manage balise information received from track (see <https://github.com/openETCS/SRS-Analysis/issues/12>)
- Calculate the actual train position based on balise and odometry information (see <https://github.com/openETCS/SRS-Analysis/issues/8>)
- Calculate the distances between the actual train position to track elements in its front

A more detailed architectural breakdown of these functions is available as a SysML model at (see <https://github.com/openETCS/modeling/tree/master/model/sysml>).

In addition, the work on this minimum functionality requires to be supported by

- The availability of the ETCS language as specified in Subset UNISIG Subset_026, chapters 7 and 8
- The ability to link intermediate and final results with the requirements of the ETCS specification (subset_026, ...)
- The usability of a data dictionary (see <https://github.com/openETCS/dataDictionary>)

These supporting prerequisites are under construction and therefore not completely operable actually. How to deal with these restrictions, will be outlined in chapter ???

1.4.2 Actual Status

Some first analysis steps for the required minimum functionality have been performed as results from the SRS-Analysis task force. These results are available at <https://github.com/openETCS/SRS-Analysis>.

1.4.3 Practical Approach

The architecture and design of the minimum OBU kernel shall be developed in consideration of the actual status, restricted prerequisites and limited resources as follows.

1.5 Glossary and Abbreviations

1.6 References

SRS-Subset 26

QA-Plan: D1.3.1

Process: D2.3

Methods: D2.4

API: D2.7

2 The openETCS Architecture of the initial kernel functions

2.1 The openETCS Tool-Chain and its impacts on the actual model

For understanding the modelling process and the modeling guidelines, we refer to <https://github.com/openETCS/modeling/blob/master/DescriptionOfWork/NewModelingDescriptionOfWork.pdf>.

To summarize the design process, the following rules are in use:

- Papyrus / SysML is used for modelling the architecture. Functions are visible on this SysML level.
- No behaviour model is allowed on SysML level.
- For referencing the requirements, links from the SysML model to the requirements document (in ProR) are being used.
- Details and especially behaviour is part of the Scade models.
- All interfaces (see also data-dictionary below) are available on bit-level.
- In the architecture model in SysML, all interfaces are available on a functional level for interfaces inside and outside the model and for interfaces between dedicated functions. Due to tool constraints the current model does not show all details for all interfaces (see dataDictionary).

The openETCS tool-chain for doing the modelling work consists of the following components:

Papyrus : for modelling the architecture (Kepler version).

In this phase only the Kepler version of the tool can be used due to incompatibilities of the Kepler and the Luna version on the SysML model. The SysML models are stored in the following location: <https://github.com/openETCS/modeling/tree/master/model/sysml>.

ProR : for keeping the requirements (REQIF).

The subset 26 is converted into a REQIF-format and also stored in the modeling repository on Github. The openETCS toolchain supports the linking of SysML model parts to SRS-Requirements. These results are also part of the architecture.

Scade : for designing and formalising the functions Scade version 15.2 is used.

The models are stored in this location: <https://github.com/openETCS/modeling/tree/master/model/Scade>. With the component Scade System Scade also has a component for designing the architecture.

In principle, the synchronisation mechanism of Scade was planned to be used for synchronising the SysML architecture and the Scade models. The idea is to automatically synchronise the SysML types and blocks with the Scade type definitions and the Scade Operators. Unfortunately, with the current set of tools this idea cannot be realised. We will investigate other tools and models to find a solution.

In addition, faults in the Kepler Papyrus version made it difficult for several members of the team to work on different submodels of the openETCS model. The issue will be solved when changing to the Luna version of Papyrus.

3 Functions of the openETCS Model

3.1 openETCS Data Dictionary

/subsubsectiondataDictionary

3.2 openETCS Generic API

3.2.1 Generic API

Because the API is currently not defined to that level, the following assumptions are implemented:

- **Eurobalise (BTM):** One telegram per call ...

3.3 openETCS Balise Group

3.3.1 Receive Eurobalise From API

- **Short Description of Functionality**

This function defines the interface of the OBU model to the openETCS generic API for Eurobalise Messages. On the interface, either a valid telegram is provided or a telegram is indicated which could not be received correct when passing the balise. The function passes the telegram without major changes of the information to the next entity for collecting the balise group information.

- **Design Constrains and Choices**

1. Decoding of balises is done at the API. Also, packets received via the interface are already transformed into a usable shape.
2. Only packets used inside the current model are passed via the interface:
Packet 5: Linking Information.
Linking Information is filled into the linking array starting from index 0 without gaps. Used elements are marked as valid. Elements are sorted according to the order given by the telegram sequence.

3.3.2 Build BG Group

- **Short Description of Functionality**

This entity collects telegrams received via the interface into Balise Group Information.

- **Reference to the SRS (or other requirements)**
- **Design Constrains and Choices**
 1. Telegrams received as invalid are passed to the “Check-Function” in order to process errors in communication with the trackside according to the requirements and in a single place. Telegrams are filled into the telegram array starting from index 0 without gaps. Used elements are marked as valid. Elements are stored according to the order given by the telegram sequence.
 2. Only packets used inside the current model are passed via the interface:
Packet 5: Linking Information.
 3. In this function packets past with the telegrams is accumulated into a balise group information.
 4. Further assumption on packet 5 (based on SRS subset 26, section 8.4.1.4)
(In this statement the term “message” is ambiguous since it can reflect to a telegram or a balise group message) Linking Information can only be passed once. This means, if linking information for the balise group is already collected with one of the earlier telegrams, the information will not be accumulated but overwritten.

3.3.3 Check BG Consistency

3.3.4 Determine BG- Orientation and LRBG

- **Short Description of Functionality**
- **Reference to the SRS (or other requirements)**
- **Design Constrains and Choices**

3.3.5 Select Usable Info

3.3.6 Perform Balise Decoding

3.4 openETCS Train Position

3.4.1 Calculate Train Position

- **Short Description of Functionality**

The main purpose of the function is to calculate the locations of linked and unlinked balise groups (BGs) and the current train position while the train is running along the track.

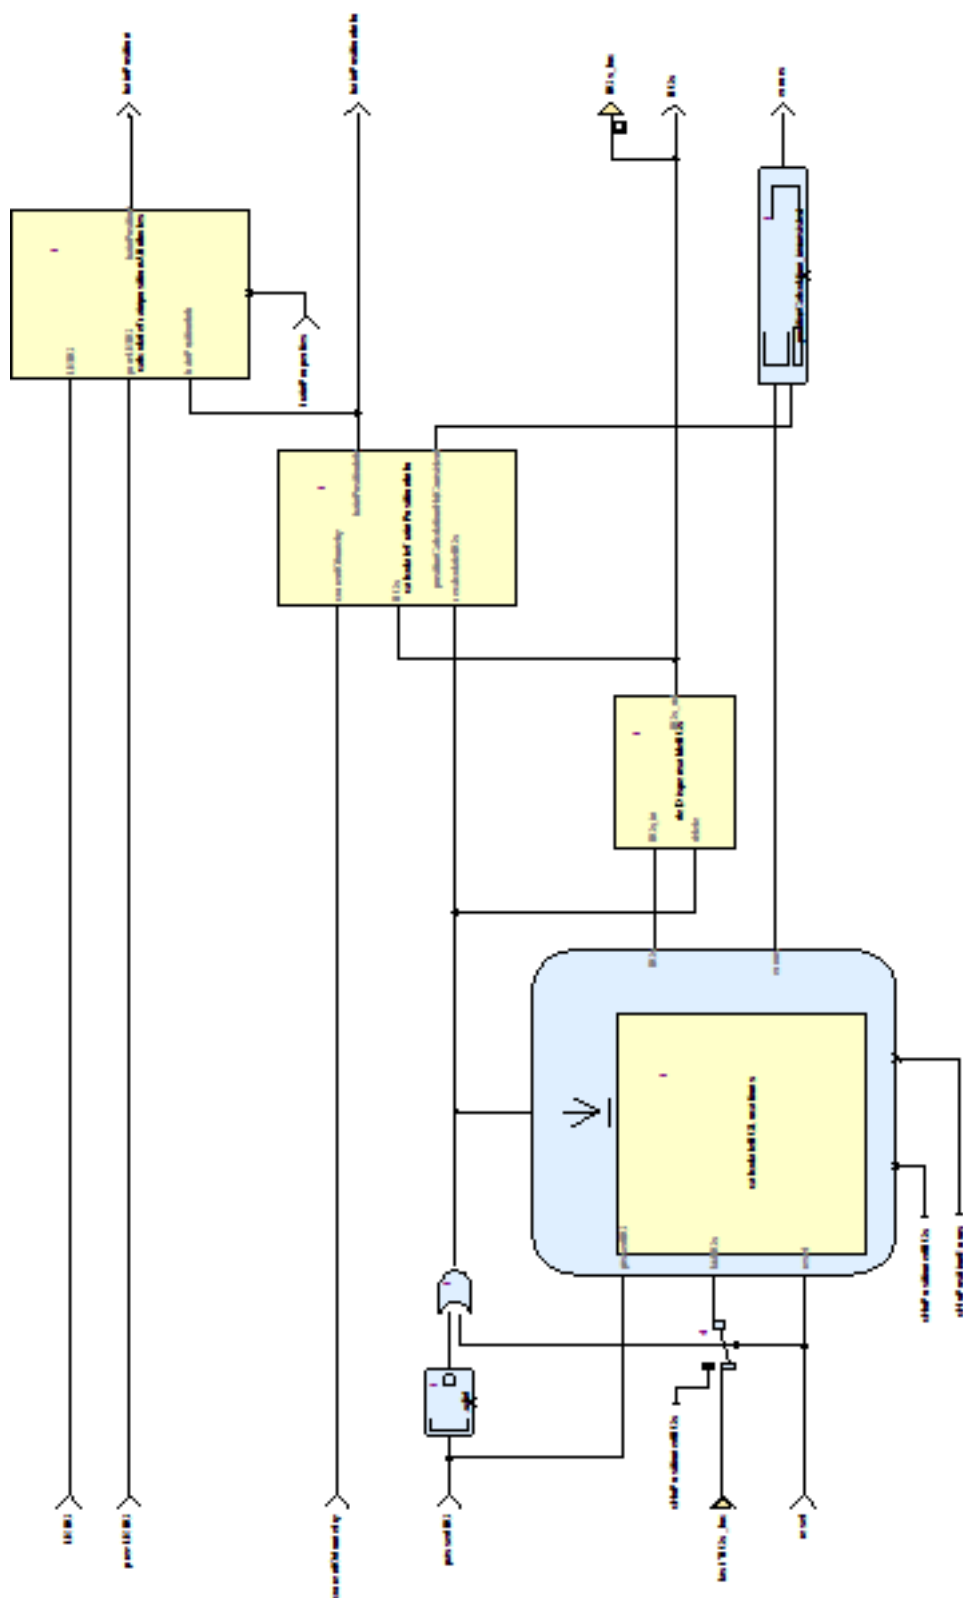


Figure 1. Structure of calculateTrainPosition

Functional Structure in Stages

The whole function `calculateTrainPosition` is subdivided into the following steps, which are performed sequentially:

1. ***calculateBGLocations***: Calculate the balise group locations
 The first stage is triggered each time the train passes a balise group (input *passedBG*). It takes the balise group header with the BG identification, the linking information (Subset 26, packet 5) and the current odometry values as inputs and calculates the location of the the passed balise group. If the passed BG has been announced via linking information previously, it takes into account the linking as well as the odometry information. If the passed BG does not meet the tolerance window announced by linking, an error flag is set. If the passed BG is an unlinked BG, its location is determined by odometry only, but related to the next previously passed linked BG, if there is one.
 Then, if the passed BG is a linked BG comprising linking information for BGs ahead, the linking information is evaluated by creating the announced BGs and computing their locations from the linking distances.
 The passed and the announced BGs are stored in a list *BGs*, ordered by their nominal location on the track.
 Afterwards the locations of all BGs are further improved by re-adjusting their locations with reference to the just passed BG. This optimizes the BG location inaccuracies around the current train position (= location of the passed BG).
2. ***delDispensableBGs***: Delete dispensable balise groups
 The second stage removes balise groups supposed not to be needed any longer from the list of *BGs*.
 If the number of stored passed linked BGs exceeds the maximum number of eight as specified in subset-26-3.6.2.2.2 c), all BGs astern are deleted. If only (passed) unlinked BGs are in the list and exceed the number of *cNoOfAtLeast_x_unlinkedBGs*, all passed BGs astern to those are removed from the list.
3. ***calculateTrainPositionInfo***: Calculate train position information.
 This stage take the list of stored BGs and the current odometry values as inputs and steadily provides the current train position.
4. ***calculateTrainpositionAttributes***: Calculate train position attribute information.
 This stage provides several additional position related attributes that might conveniently be used by subsequent consumers in the architecture. It requires the actual LRBG and the previous LRBG to be assigned external from the list *BGs*.

- **Reference to the SRS (or other requirements)**

The component `calculateTrainPosition` determines the location of linked and unlinked balise groups and the current train position during the train trip as specified mainly in subset-026-3.6

- **Design Constraints and Choices**

The following constraints and prerequisites apply:

1. The input data received from the balises groups must have been checked and filtered for validity, consistency and the appropriate train orientation before delivering them to `calculateTrainPosition`.
2. The storage capacity for balise groups is finite. `calculateTrainPosition` will raise an error flag when a balise group cannot be stored due to capacity limitations.

3. calculateTrainPosition will raise an error flag if a just passed balise group is not found where announced by linking information. It will not (yet) detect when an announced balise group is missing.
4. calculateTrainPosition is not yet prepared for train movement direction changes.
5. calculateTrainPosition does not yet consider repositioning information.

3.4.2 Provide Position Report

- **Short Description of Functionality**

This function takes the current train position and generates a position report which is sent to the RBC. The point in time when such a report is sent is determined from event, on the one hand, and position report parameters—which are basically triggers—provided by the RBC, on the other hand.

- **Reference to the SRS (or other requirements)**

Most of the functionality is described in subset 26, chapter 3.6.5.

- **Design Constrains and Choices**

1. The message length (i.e., attribute L_MESSAGE) is by default set to 0; the actual value will be set by the Bitwalker/API.
2. The attribute Q_SCALE is assumed to be constant; that is, all operations using this attribute do not convert between different values of that attribute.
3. PositionReportHeader: The time stamp (i.e., attribute T_TRAIN) is not set; this should be done once the message is being sent by the API
4. Packet4: When aggregating the data for this packet, an error message might be overwritten by another error message. Because the specification only allows to sent one error in one position report, errors are not being stored in a queue, for instance.
5. Packet44: This packet is currently not contained in a position report as it is not part of the kernel functions.
6. The usage of attributes D_CYCLOC and T_CYCLOC as part of the triggers specified by the position report parameters (i.e., Packet 58 sent by the RBC) may lead to unexpected results if a big clock cycle together with small values for the attributes is used. The cause is that the current model increments at every clock cycle the reference value for the distance and time by at most D_CYCLOC and T_CYCLOC, respectively and not a factor of it.

References

- [1] US Army Corps of Engineers, Engineer Research and Development Center. *Guide for Preparing Technical Information Reports of the Engineer Research and Development Center*, January 2006.
- [2] Walter Schmidt. *Using Common PostScript Fonts With L^AT_EX*. PSNFSS Version 9.2, September 2004. <http://ctan.tug.org/tex-archive/macros/latex/required/psnfss>.
- [3] Hideo Umeki. *The geometry Package*, December 2008. <http://ctan.tug.org/tex-archive/macros/latex/contrib/geometry>.

- [4] Piet van Oostrum. *Page Layout in L^AT_EX*, March 2004. <http://ctan.tug.org/tex-archive/macros/latex/contrib/fancyhdr>.
- [5] D. P. Carlisle. *Packages in the ‘Graphics’ Bundle*, November 2005. <http://ctan.tug.org/tex-archive/macros/latex/required/graphics>.
- [6] UK T_EX Users Group. UK list of T_EX frequently asked questions. <http://www.tex.ac.uk/cgi-bin/texfaq2html>, 2006.
- [7] Leslie Lamport. *L^AT_EX: a Document Preparation System*. Addison-Wesley Publishing Company, Reading, Ma., 2 edition, 1994. Illustrations by Duane Bibby.
- [8] Department of Defense, Washington, DC. *Distribution Statements on Technical Documents. DoD Directive 5230.24*, 1987.
- [9] Axel Sommerfeldt. *Typesetting Captions with the caption Package*, February 2007. <http://ctan.tug.org/tex-archive/macros/latex/contrib/caption>.
- [10] Patrick W. Daly. *Natural Sciences Citations and References (Author-Year and Numerical Schemes)*, February 2009. <http://ctan.tug.org/tex-archive/macros/latex/contrib/natbib>.
- [11] Michael Downes and Barbara Beeton. *The amsart, amsproc, and amsbook document classes*. American Mathematical Society, August 2004. <http://www.ctan.org/tex-archive/macros/latex/required/amslatex/classes>.
- [12] David Carlisle. *The longtable Package*, February 2004. <http://www.ctan.org/tex-archive/macros/latex/required/tools>.
- [13] Martin Schröder. *The ragged2e Package*, March 2003. <http://ctan.tug.org/tex-archive/macros/latex/contrib/ms>.
- [14] Leslie Lamport, Frank Mittelbach, and Johannes Braams. *Standard Document Classes for L^AT_EX version 2e*, 1997. <http://ctan.tug.org/tex-archive/macros/latex/base>.
- [15] David Carlisle. *The dcolumn Package*, May 2001. <http://ctan.tug.org/tex-archive/macros/required/tools>.
- [16] American Mathematical Society. *User’s Guide for the amsmath Package (Version 2.0)*, February 2002. <http://ctan.tug.org/tex-archive/macros/latex/required/amslatex/math/amsldoc.pdf>.
- [17] Boris Veytsman. *L^AT_EX Support for Microsoft Georgia and ITC Franklin Gothic In Text and Math*, July 2009. <http://ctan.tug.org/tex-archive/fonts/mathgiffg/>.

References

- [1] Leslie Lamport, *L^AT_EX: A Document Preparation System*. Addison Wesley, Massachusetts, 2nd Edition, 1994.