

Robust Model Predictive Control

Learning Dynamical Systems

Lorenzo Favaron
2128830

Luca Galeazzo
2158514

Lorenzo Trubian
2125512

July 15, 2026

1 Introduction

$$\begin{aligned}x(k+1) &= Ax(k) + Bv(k) + Ku(k) \\ y(k) &= Cx(k) + Dv(k)\end{aligned}$$

2 Model Predictive Control

$$\begin{aligned}x(k+1) &= Ax(k) + Ku(k) \\ y(k) &= Cx(k) \\ x(k) &= x_k,\end{aligned}$$

over the time horizon $[k, k+N]$, in the presence of polyhedral constraints on the state and input variables. Let the control sequence be $\mathbf{u}_k = (u(k), u(k+1), \dots, u(k+N-1))$. The cost function is

$$\begin{aligned}J(x(k), \mathbf{u}_k, k) &= \sum_{i=0}^{N-1} [y^T(k+i)Qy(k+i) + u^T(k+i)Ru(k+i)] + y^T(k+N)P_f y(k+N) \\ &= \sum_{i=0}^{N-1} [x^T(k+i)C^TQCx(k+i) + u^T(k+i)Ru(k+i)] + x^T(k+N)C^TP_fCx(k+N) \\ &= \sum_{i=0}^{N-1} [\|x(k+i)\|_{C^TQC}^2 + \|u(k+i)\|_R^2] + \|x(k+N)\|_{C^TP_fC}^2\end{aligned}\tag{1}$$

Let us define

$$z = \begin{bmatrix} x(k+1) \\ \vdots \\ x(N) \\ u(k) \\ \vdots \\ u(N-1) \end{bmatrix}$$

The *non-condensed form* of the MPC problem can be written as

$$\begin{aligned}\min_z \bar{J}(x(k), U(k), k) &= \min_z z^T \bar{H} z \\ \text{subject to} \quad &G_{eq} z = E_{eq} x(k).\end{aligned}\tag{2}$$

where the system evolution is encoded as equality constraint using the matrices

$$G_{eq} = \left[\begin{array}{cccc|ccc} I & & & & -K & & \\ -A & I & & & -K & & \\ & -A & I & & -K & & \\ & & \ddots & \ddots & & \ddots & \\ & & & -A & I & & \\ & & & & & & -K \end{array} \right] E_{eq} = \begin{bmatrix} A \\ 0 \\ \vdots \\ 0 \end{bmatrix} \quad (3)$$

and the cost function matrix $\bar{H}$ describing (1) is

$$\bar{C} = \left[\begin{array}{ccc|ccc} C & & & & & \\ & \ddots & & & & \\ & & C & & & \\ \hline & & & I & & \\ & & & & \ddots & \\ & & & & & I \end{array} \right], \quad \bar{H} = \bar{C}^\top \left[\begin{array}{ccc|ccc} Q & & & & & \\ & \ddots & & & & \\ & & P_f & & & \\ \hline & & & R & & \\ & & & & \ddots & \\ & & & & & R \end{array} \right] \bar{C} \quad (4)$$

A natural question noticing the form of (3) is: what role do $x(k)$ and E_{eq} actually play in this problem? The key point is that the starting condition is not simply the current state, but rather the predicted free evolution based on the current state. This becomes especially important when estimators are involved: it is not strictly necessary to provide the MPC with $x(k)$; instead, one can supply the one-step-ahead prediction $\hat{x}_{free}(k+1 | k)$ of the free evolution. In practice, this is what is usually done, and the matrix E_{eq} is often completely discarded, with the state-evolution constraints being reformulated accordingly as

$$G_{eq}z = x_0 \quad \text{with} \quad \begin{bmatrix} \hat{x}_{free}(k+1|k) \\ 0 \\ \vdots \\ 0 \end{bmatrix}$$

3 Robust state space estimation

In this section only, the matrix K will be assigned a meaning that differs from that of the input-state matrix. This does not pose a problem, since the matrix introduced here is used purely internally, and the lack of inputs prevents any lasting ambiguity in the notation. This convention is adopted to remain as consistent as possible with the notation commonly used in the Robust Kalman Filter literature.

3.1 Kalman Filter

$$\begin{aligned} G_t &= K_{x_{t+1}y_t} K_{y_t}^{-1} \\ &= \left(A_t V_t C_t^\top + B_t D_t^\top \right) \left(C_t V_t C_t^\top + D_t D_t^\top \right)^{-1}. \end{aligned}$$

The least-favorable covariance matrix $\tilde{K}_{x_{t+1}}$ can be evaluated as follows. Let

$$\begin{aligned} P_{t+1} &= K_{x_{t+1}} - K_{x_{t+1}y_t} K_{y_t}^{-1} K_{y_t x_{t+1}} \\ &= (A_t - G_t C_t) V_t (A_t - G_t C_t)^\top + (B_t - G_t D_t)(B_t - G_t D_t)^\top \end{aligned}$$

and

$$V_{t+1} = \tilde{K}_{x_{t+1}} - K_{x_{t+1}y_t} K_{y_t}^{-1} K_{y_t x_{t+1}}$$

denote the nominal and least-favorable conditional covariance matrices of x_{t+1} given $\mathcal{Y}_t$. Then

$$V_{t+1}^{-1} = P_{t+1}^{-1} - \lambda_t^{-1} I_n$$

where the Lagrange multiplier $\lambda_t > r(P_{t+1})$ is selected such that

$$\gamma_t(\lambda_t) = \frac{1}{2} \left[\text{tr} \left((I_n - \lambda_t^{-1} P_{t+1})^{-1} - I_n \right) + \ln \det (I_n - \lambda_t^{-1} P_{t+1}) \right] = c \quad (5)$$

A direct computation of its derivative shows that $\gamma_t(\lambda_t)$ is monotone decreasing over $(r(P_{t+1}), \infty)$ and has for range $\mathbb{R}^+$. Thus, for any divergence tolerance $c > 0$, there exists a matching Lagrange multiplier $\lambda_t > r(P_{t+1})$. Given that it is evaluated repeatedly throughout the algorithm, and that subsequent computations depending on its value exhibit high sensitivity, both numerical stability and computational efficiency must be considered when determining λ_t . In this work, we employ a variant of the regula falsi secant method, incorporating the modifications proposed by Anderson and Björk in [1] (a general pseudo-code for this family of algorithms can be found in [2]).

Algorithm 1 Robust Kalman filter at time t .

Require: $c_t, \hat{x}_t, V_t, y_t$

Ensure: $\hat{x}_{t+1}, V_{t+1}, G_t, \lambda_t$

- 1: $G_t \leftarrow (A_t V_t C_t^\top + B_t D_t^\top)^\top (C_t V_t C_t^\top + D_t D_t^\top)^{-1}$
 - 2: $\hat{x}_{t+1} \leftarrow A_t \hat{x}_t + G_t (y_t - C_t \hat{x}_t)$
 - 3: $P_{t+1} \leftarrow (A_t - G_t C_t) V_t (A_t - G_t C_t)^\top + (B_t - G_t D_t)(B_t - G_t D_t)^\top$
 - 4: Find λ_t such that $c_t = \gamma_\tau(P_{t+1}, \lambda_t)$
 - 5: Compute
 $V_{t+1} \leftarrow (I_n - \lambda_t^{-1} P_{t+1})^{-1} P_{t+1}$
-

3.2 Least-Favorable Model

Freely inspired by fifth section of [3], equations (86)-(92). Starting with

$$W_{T+1}^{-1} = \lambda_t^{-1} I_{n+p}$$

the backward recursion requires to compute the matrices

$$\begin{aligned} \tilde{K}_t &= \left(I_{n+p} - (B_t - G_t D_t)^\top W_{t+1}^{-1} (B_t - G_t D_t) \right)^{-1} \\ H_t &= \tilde{K}_{v_t} (B_t - G_t D_t)^\top W_{t+1}^{-1} (A_t - G_t C_t) \\ \Omega_t^{-1} &= (A_t - G_t C_t)^\top W_{t+1}^{-1} (A_t - G_t C_t) + H_t^\top \tilde{K}_t^{-1} H_t. \end{aligned}$$

The recursion continues setting the next W as:

$$W_t^{-1} = \Omega_t^{-1} + \lambda_{t-1}^{-1} I_n.$$

where L_t is an arbitrary matrix square root of $\tilde{K}_t$, i.e., $L_t L_t^\top = \tilde{K}_t$.

Freely inspired by fifth section of [3], equations (93)-(95)

$$\xi_t \triangleq \begin{bmatrix} x_t \\ e_t \end{bmatrix}$$

the least-favorable model admits a state-space representation

$$\begin{aligned}\xi_{t+1} &= \tilde{A}_t \xi_t + \tilde{B}_t \epsilon_t \\ y_t &= \tilde{C}_t \xi_t + \tilde{D}_t \epsilon_t\end{aligned}$$

with twice the dimension of the nominal state-space model, where

$$\begin{aligned}\tilde{A}_t &= \begin{bmatrix} A_t & B_t H_t \\ 0 & A_t - G_t C_t + (B_t - G_t D_t) H_t \end{bmatrix}, & \tilde{B}_t &= \begin{bmatrix} B_t \\ (B_t - G_t D_t) \end{bmatrix} L_t, \\ \tilde{C}_t &= [C_t \quad D_t H_t], & \tilde{D}_t &= D_t L_t.\end{aligned}\tag{6}$$

Algorithm 2 Least-Favorable Model for the time interval $[k, k + N]$.

Require: $c, V_k, N, N_f > N$ (default $N_f = 2N$)

Ensure: $\tilde{A}_t, \tilde{B}_t, \tilde{C}_t, \tilde{D}_t$ for $t \in [k, k + N]$

```

1:  $\triangleright$  Forward Riccati iterations at least to large enough time  $N_f$   $\triangleleft$ 
2: for  $t = 1, \dots, N_f$  do
3:    $V_{t+1}, G_t, \lambda_t \leftarrow \text{RKf}(c, V_t)$   $\triangleright$  Algorithm 1 without state-prediction (step 2)
4:    $\triangleright$  Backward sweep to compute LFM covariances  $\triangleleft$ 
5:    $W_{N_f}^{-1} \leftarrow \lambda_{N_f}^{-1} I_n$ 
6:   for  $t = N_f - 1, \dots, 1$  do
7:      $\triangleright$  temporary matrices  $\triangleleft$ 
8:      $A_{tmp} \leftarrow A_t - G_t C, \quad B_{tmp} \leftarrow B_t - G_t D$ 
9:      $\triangleright$  computation of  $K^{-1}, H, L$   $\triangleleft$ 
10:     $K_t^{-1} \leftarrow I_{n+p} - B_{tmp}^\top W_t^{-1} B_{tmp}$ 
11:     $H_t \leftarrow K_t B_{tmp}^\top W_t^{-1} A_{tmp}$ 
12:     $L_t \leftarrow \text{cholesky}(K^{-1})^{-1}$ 
13:     $\triangleright$  update values for next iteration  $\triangleleft$ 
14:    if  $t = 1$  then
15:      exit cycle
16:    else
17:       $\Omega_t^{-1} \leftarrow A_{tmp}^\top W_{t+1} A_{tmp} + H_t^\top K_t^{-1} H_t$ 
18:       $W_t^{-1} \leftarrow \Omega_t^{-1} + \lambda_{t-1}^{-1} I_n$ 
19:   $\triangleright$  Forward sweep to compute the LFM matrices to  $N$   $\triangleleft$ 
20:  for  $t = 1, \dots, N$  do
21:     $A_{tmp} \leftarrow A_t - G_t C, \quad B_{tmp} \leftarrow B_t - G_t D$ 
22:    Compute the matrices of LFM:
    
$$\tilde{A}_t \leftarrow \begin{bmatrix} A_t & B H_t \\ 0 & A_{tmp} + B_{tmp} H_t \end{bmatrix}, \quad \tilde{B}_t \leftarrow \begin{bmatrix} B_t \\ B_{tmp} \end{bmatrix} L_t, \quad \tilde{C}_t \leftarrow [C_t \quad D H_t], \quad \tilde{D}_t \leftarrow D_t L_t$$


```

4 Least favorable model for MPC

Thus, QP is now solving the MPC problem with a time-varying nominal model wich corresponds to the Least-Favorable Model produced by the previous analysis. Considering the matrices (6), the

system evolution constraint (3) becomes

$$G_{eq} = \left[\begin{array}{cccccc|cccc} I & & & & & & -K & & & \\ -\tilde{A}_2 & I & & & & & & -K & & \\ & -\tilde{A}_3 & I & & & & & & -K & \\ & & \ddots & \ddots & & & & & \ddots & \\ & & & -\tilde{A}_N & I & & & & & -K \end{array} \right] E_{eq} = \begin{bmatrix} \tilde{A}_1 \\ 0 \\ \vdots \\ 0 \end{bmatrix}$$

and the cost function (4) is

$$\bar{C} = \left[\begin{array}{ccc|ccc} \tilde{C}_1 & & & & & \\ & \ddots & & & & \\ & & \tilde{C}_N & & & \\ \hline & & & I & & \\ & & & & \ddots & \\ & & & & & I \end{array} \right], \quad \bar{H} = \bar{C}^\top \left[\begin{array}{ccc|ccc} Q & & & & & \\ & \ddots & & & & \\ & & P_f & & & \\ \hline & & & R & & \\ & & & & \ddots & \\ & & & & & R \end{array} \right] \bar{C}.$$

Algorithm 3 Robust MPC at time k .

Require: $N, c, \hat{x}_k, V_k, y_k$

Ensure: u_k, J_k

- 1: $\hat{x}_{k+1,free} \leftarrow RKF(c, \hat{x}_k, V_k, y_k)$ $\triangleright$ Algorithm 1 to predict the free evolution
 - 2: $\{\tilde{A}_t, \tilde{C}_t\}_{t \in [k, k+N]} \leftarrow LFM(c, V_k, N)$ $\triangleright$ Algorithm 2
 - 3: find u_k solving the QP (2) using the time-varying matrices $G_{eq}, \bar{H}$ showed above
-

5 Selection of the optimal tolerance c

Up to this point, the tolerance c has been chosen a priori. The proposed approach instead allows the controller to determine c by adding an additional term to the quadratic programming (QP) problem (2) with an additional term. In this formulation, the controller autonomously balances the quality of the prediction achieved so far against the prediction adopted by the optimal control law.

$$\min_{c, u, \hat{y}, \hat{x}} \sum_{t=-L}^0 \beta^t \|y_t - \hat{y}_{t|t-1}(c)\|^2 + J(x(k), \mathbf{u}_k, k) \quad (7)$$

Once the optimal tolerance has been selected in the MPCs, using the free-evolution prediction $\hat{x}_{c_j, free}(k+1|k)$ obtained from the RKF, the optimal prediction $\hat{x}_{c_{best}}(k+1|k)$ (which already includes both the free evolution and the effect of the selected input) will serve as the initial condition for all filters in the subsequent iteration.

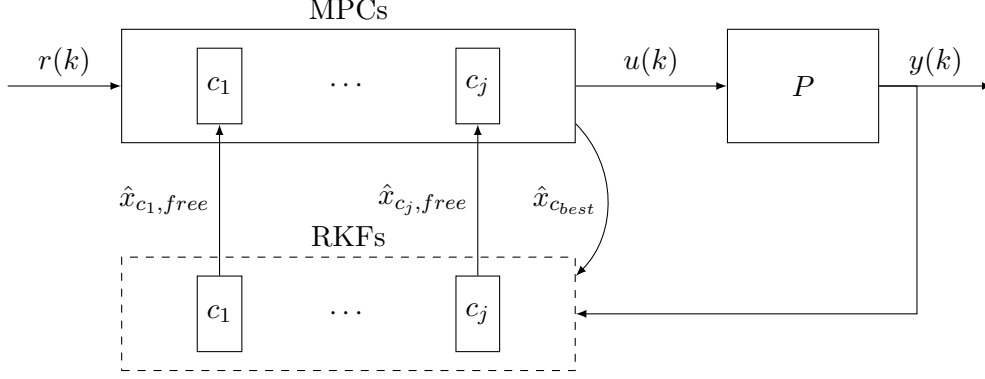


Figure 1: The dashed line emphasizes that each RKF operates independently from the others (apart from the shared initial estimate $\hat{x}$ and the measured output y), and therefore no computations are performed across filters. This independence does not hold for the MPCs: after each MPC solves its own optimization problem, an additional minimization problem is formulated that also incorporates past predictions, producing a single control input u along with an optimal tolerance and the corresponding best prediction $\hat{x}_{best}$.

As illustrated by the global scheme in Figure 1, the minimization problem (7) is addressed only for a discrete set of tolerance values c . The main difficulty in tackling the full minimization problem in a single step lies in the fact that there is no closed-form expression for the Lagrange multiplier λ that satisfies equation (5).

Algorithm 4 Robust MPC with tolerance selection at time k .

Require: $N, \{c_j\}_j, \hat{x}_k, V_k, y_k, \beta, L$

Ensure: $u_k, \hat{x}_{k+1}$

- 1: **for all** c_j **do**
 - 2: $u_{k,c_j}, \hat{x}_{k+1,c_j}, J_{k,c_j} \leftarrow \text{RMPC}(c_j, \hat{x}_{k,free}, V_k, y_k)$
 - 3: $J_{k,c_j} \leftarrow J_{k,c_j} + \text{estimate_uncertainty}(c_j)$
 - 4: $c_{best} \leftarrow \arg \min_{c_j} J_{k,c_j}$
 - 5: $u_k \leftarrow u_{k,c_{best}}$
 - 6: $\hat{x}_{k+1} \leftarrow \hat{x}_{k+1,c_{best}}$
-

▷ Algorithm 3

References

- [1] N. Anderson and Å. Björck, “A new high order method of regula falsi type for computing a root of an equation,” *BIT Numerical Mathematics*, vol. 13, no. 3, pp. 253–264, 1973.
- [2] S. M. L. Galdino, “A family of regula falsi root-finding methods,” 2011. [Online]. Available: <https://api.semanticscholar.org/CorpusID:15854811>.
- [3] B. C. Levy and R. Nikoukhah, “Robust state space filtering under incremental model perturbations subject to a relative entropy tolerance,” *IEEE Trans. Autom. Control*, vol. 58, no. 3, pp. 682–695, Mar. 2013.