

J4
B_PLUS
B_DRV
B_V1
VBIAS_NEG
HEATER_A
HEATER_B
GND
OFFBOARD SUPPLY
B_V1
100k R3
C3
100n
J2
IN_RAW
GND
IN
IN_C
R1
1k
V1_G
V1B
ECC83
470k R2
GND
V1_A
C5
1u 630V
V1_K
1k R4
GND
R9
120k
OT_S_HI
C6
18p
OT_S_HI
LTP_G1
1M R5
GND
B_DRV
82k R6
C15
470p 630V
LTP_STEP
10k
V2B
ECC83
LTP_K
22k R8
VBIAS_NEG
B_DRV
82k R7
R26
LTP_A2
V2A
ECC83
V2_G2
470k R10
GND
C7
1u 630V
G3_IN
R13
5k
V3_G1
V3A
KT88
G2_V3
R17
470R 2W
OT_A1
100k R11
BIAS_A
1R 1W R19
GND
C8
1u 630V
LTP_A1
G4_IN
R14
5k
V4_G1
V4A
KT88
G2_V4
R18
470R 2W
OT_A2
100k R12
BIAS_B
1R 1W R20
GND
TR2
OT_UL1
B_PLUS
OT_UL2
OT_S_HI
GND
OT 4k a-a UL 70W
OT_S_HI
J3
GND
SPEAKER
RV1
10k bias V3
VBIAS_NEG
BIAS_A
15k R15
GND
C9
1u 100V
BIAS_A
GND
RV2
10k bias V4
VBIAS_NEG
BIAS_B
15k R16
GND
C10
1u 100V
BIAS_B
GND
V1A
ECC83
GND
V1C
ECC83
HEATER_A
HEATER_B
HEATER_A
V2C
ECC83
HEATER_A
HEATER_B
HEATER_A
V3B
KT88
HEATER_A
HEATER_B
V4B
KT88
HEATER_A
HEATER_B
Power supply
File: power.kicad_sch
Sheet: /
File: amplikt88.kicad_sch
Title: amplikt88 – KT88 push-pull, ECC83 LTP driver
Size: A3
Date:
Rev:
KiCad E.D.A. 10.0.8
Id: 1/2

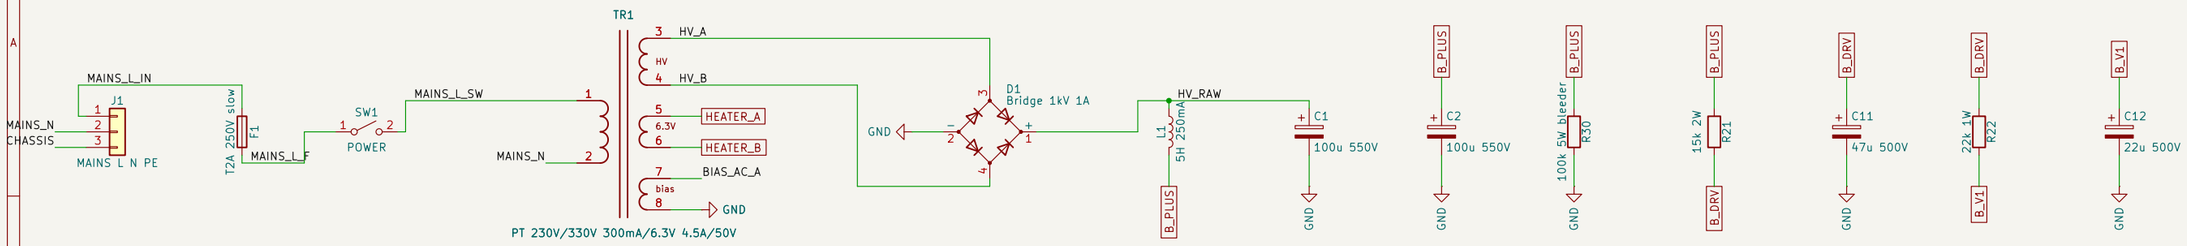

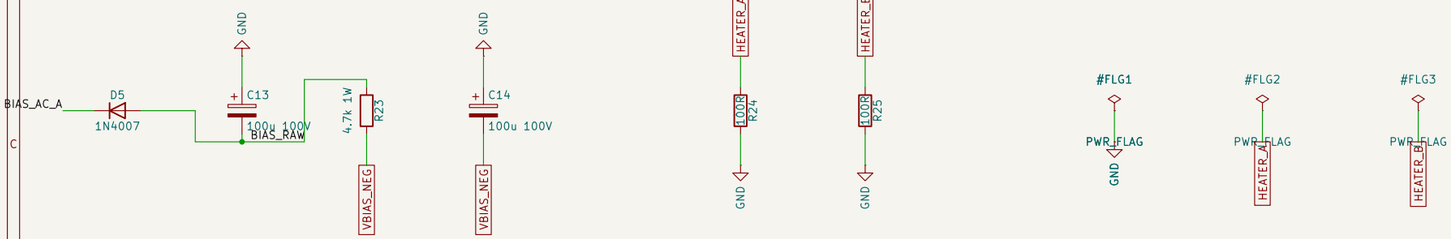

Sheet: /Power supply/
File: power.kicad_sch

Title: amplikt88 – power supply

Size: A3	Date:	Rev:
KiCad E.D.A. 10.0.8		Id: 2/2