


SENNDIK

D SERIES SINGLE-PHASE SOLID-STATE RELAY

Integrated heat dissipation product

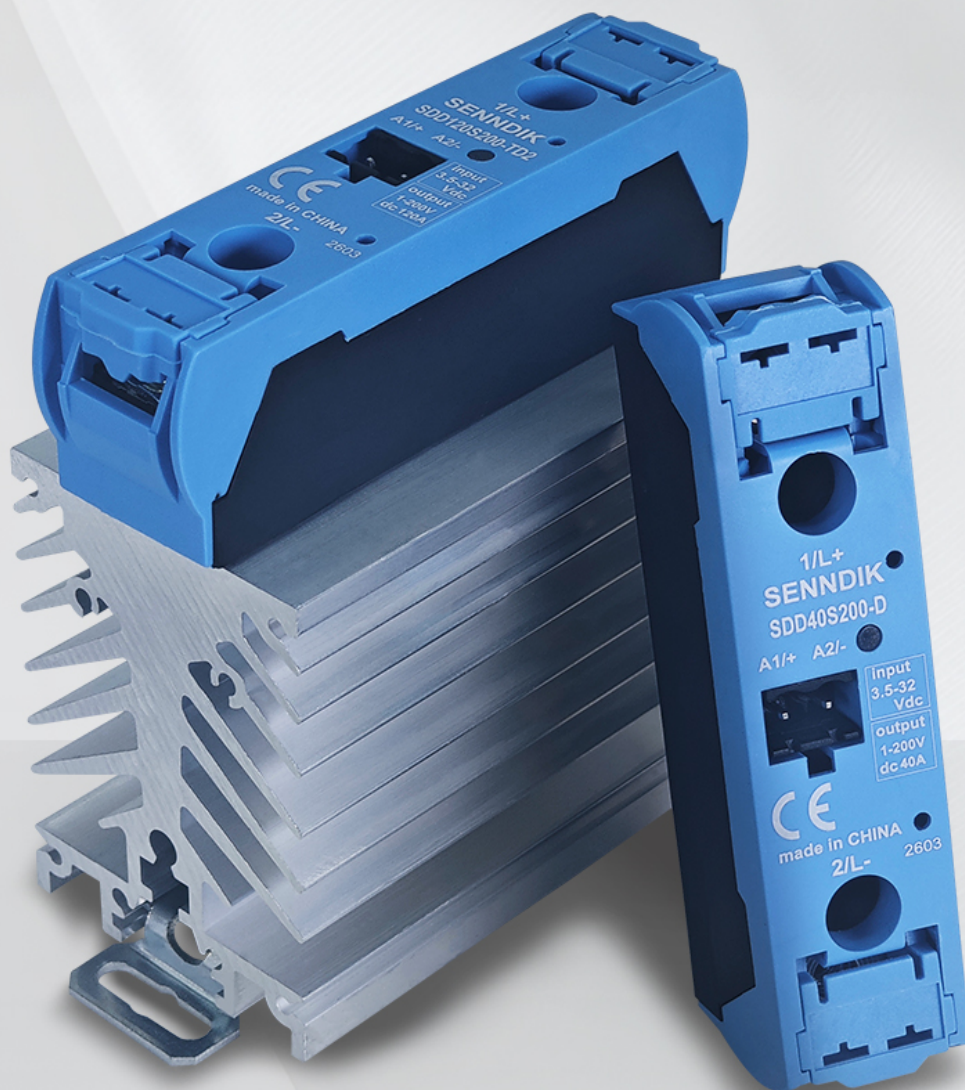

Built in TVS protection, IP20 protection level, standard size 22.5mm rail installation

- Application scenarios
- Mainly used in glass, photovoltaics, etc



Product Introduction


The D-encapsulated series is a rail-mounted DC solid-state relay designed specifically for industrial control applications. It utilizes MOSFET technology, features integrated TVS protection at the output, supports load voltage ranges of 1-60VDC and 5-200VDC, and operates with a control voltage of 3.5-32VDC.

Using ultra-thin heat sink integrated solid-state relays, this ultra-narrow solid-state relay represents an evolution in **SENNDIK**'s expertise in solid-state switching. Our ultra-thin heat sink integrated solid-state relay has a width half that of the K-type solid-state relay, saving 50% of installation space, reducing installation time, and enabling faster and easier wiring without any impact on the performance or reliability of the solid-state relay. The D-packaged series solid-state relays, due to their compact size, offer a unique opportunity to conserve panel space.

Has the following characteristics:

- TVS protection
- IP20 protection level
- Integrated heat dissipation and packaging
- EMC anti-interference design
- MOSFET technology
- Can install 35mm standard guide rail (DINBN50022) can also fix screws

SELECTION GUIDE

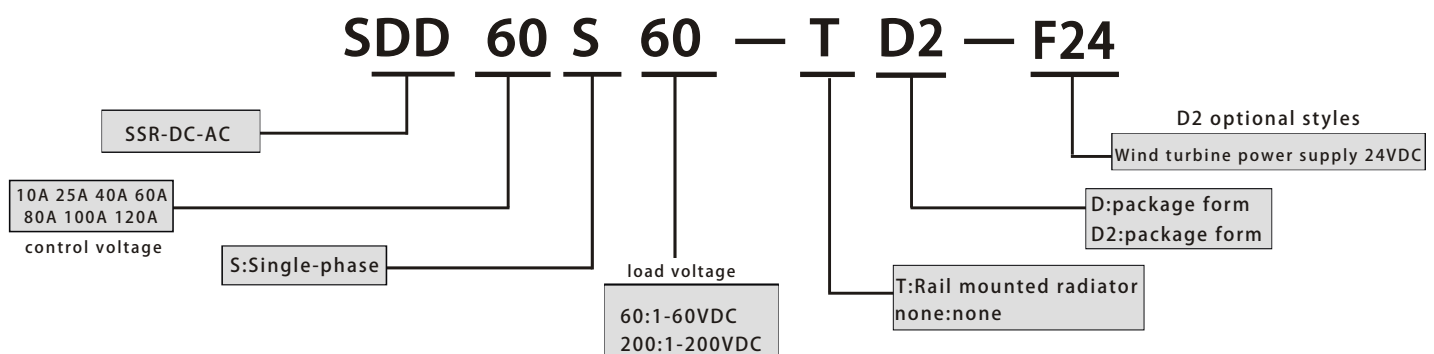


Product parameters (input TA=25 °)	
Control voltage range	3.5-32VDC
Connected voltage	3.5VDC
Turn off voltage	1VDC
Maximum input current	25ma
Reverse polarity voltage	-32VDC

Output parameters (TA = 25° C)								
Operating voltage range		□□S60:1-60VDC			□ □S200:5-200VDC			
Off-state leakage current		1ma						
Minimum load current		0.6ma						
Start Time		1ms						
Turn-off time		1ms						
Maximum surge current (@10ms)		30A	75A	120A	180A	240A	300A	360A
Breakdown Voltage		60VDC				200VDC		
Maximum On-Resistance	60VDC	11mΩ	11mΩ	11mΩ	6. 2mΩ	4. 2mΩ	4. 2mΩ	2. 4mΩ
	200VDC	150mΩ	75mΩ	40mΩ	45mΩ	17. 5mΩ	4. 2mΩ	9. 7mΩ
Transient Voltage VPK		1600[VPK]						
Insulation voltage between input and output terminals, and between output and base plate (50/60Hz)		>2000Vrms						
Operating temperature range		-40℃~+80℃						
Storage ambient temperature range		-40℃~+100℃						

Other parameters	
frequency range	47H-63Hz
insulation resistance	1000MoΩ (500VDC)
dielectric withstand	4000Vrms,1 minute,Between input and output
	2500Vrms,1 minute,Between input, output, and radiator
Working environment temperature range	-30 °C ~+80 °C
Storage environment temperature range	-30 °C ~+100 °C

SCHEMATIC DIAGRAM OF WIRING

Please contact us to select the correct protection originals C1 and C2

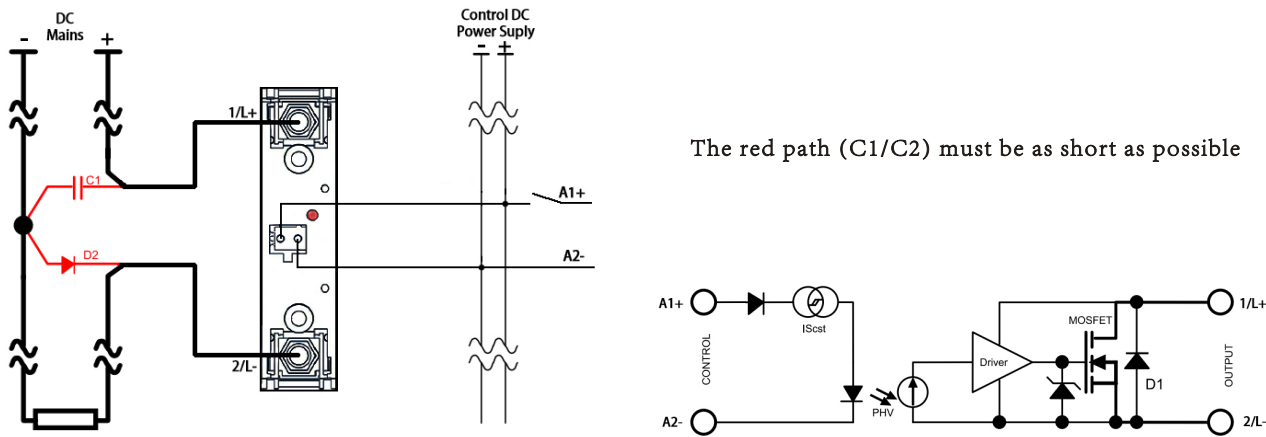

Precautions

1. Relays are power devices, and space should be left between relays during installation, as shown in Figure 1
2. The installation environment of the relay requires ventilation and heat dissipation, ensuring that the temperature of the relay radiator does not exceed 90 °C under any circumstances
3. It is necessary to use a screwdriver and wires as required to connect the relay, as shown in Figure 1
4. Do not use this product beyond the scope of the instruction manual






Figure 1 Installation distance requirements

		Input terminals A1, A2	Load end 1/L1, 2/T1
Screwdriver specifications		slotted screw, 0.6x3.5mm	slotted screw 2#, 0.8x5.5mm
Recommended torque		0.6N.m	1N.m
Stripping length		7cm	10cm
Select wire diameter	single-core wire	1x0.5~2.5mm ² 2x0.5~1mm ²	1x0.5~2.5mm ² 2x0.5~1mm ²
	Multi core wire (with cold pressed terminals)	1x0.5~2.5mm ² 2x0.5~1mm ²	1x1.5~10mm ² 2x1.5~6mm ²
	American Standard Wire (AWG)	1x20 ~12	2x14 ~10




INSTALLATION INSTRUCTIONS

Use two screws, first tighten the two screws with a maximum torque of 1 Nm, and then continue to use the nominal torque of 1.8 Nm. It is recommended to use an electric screwdriver instead of a pneumatic tool. It can better adjust the specified tightening parameters, especially to achieve a smoother final torque. When using pneumatic systems, impact and torque overshoot may occur. Suggest limiting the speed of installing screws to ensure even flow and diffusion of thermal paste, especially when using denser thermal paste. If tightened at high speed, internal damage may occur. The maximum screw speed for tightening should not exceed 250 rpm. Soft tightening (without torque overshoot) will reduce internal stress.


install

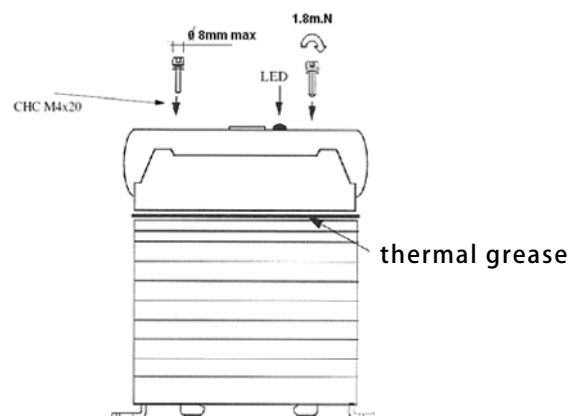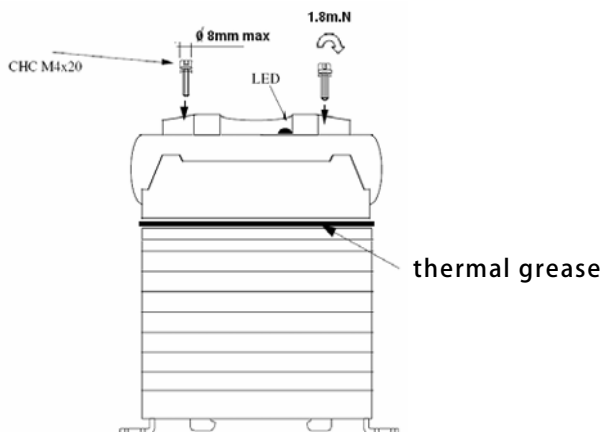





SIZE CHART

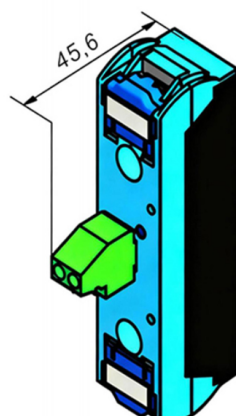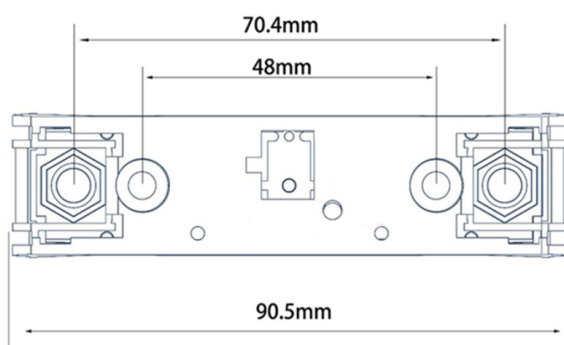




SIZE CHART

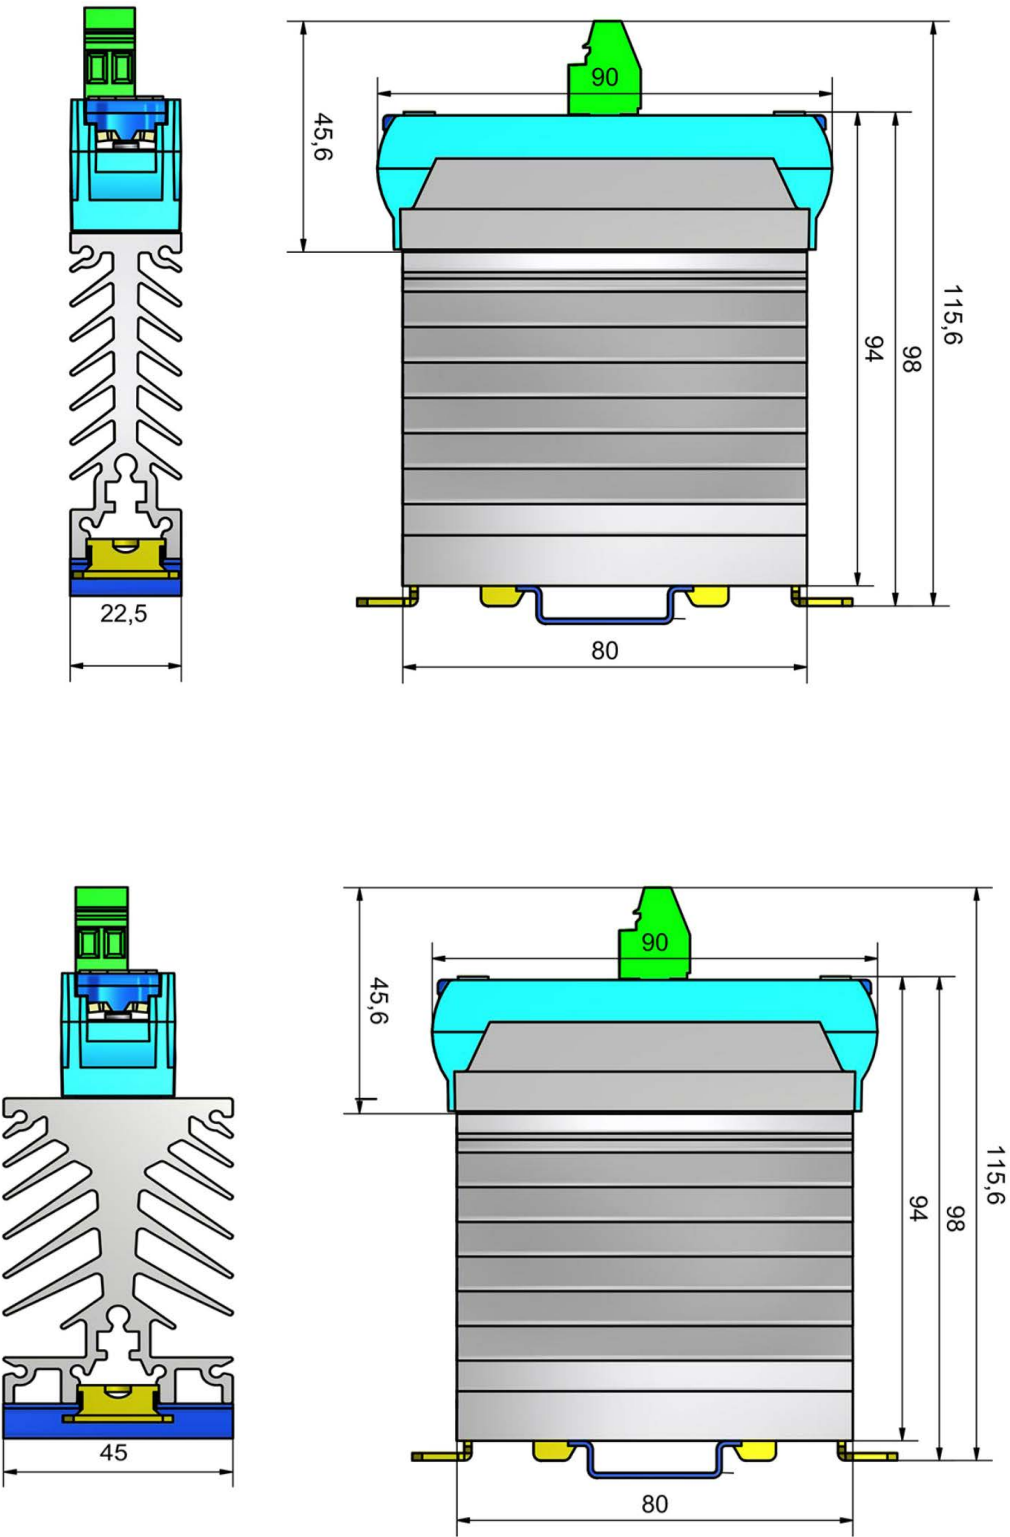

TEMPERATURE

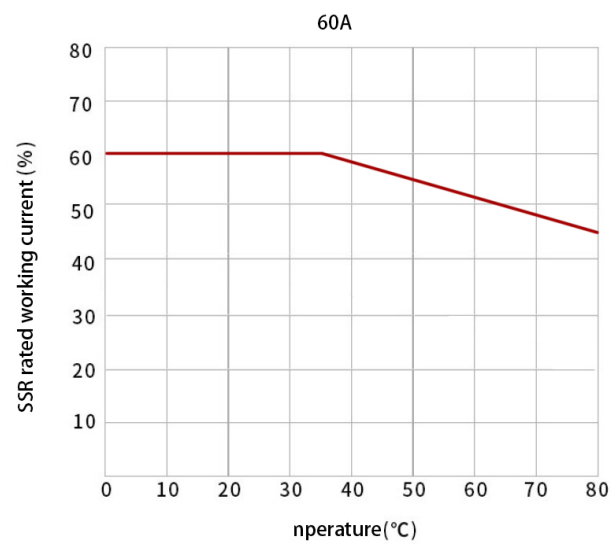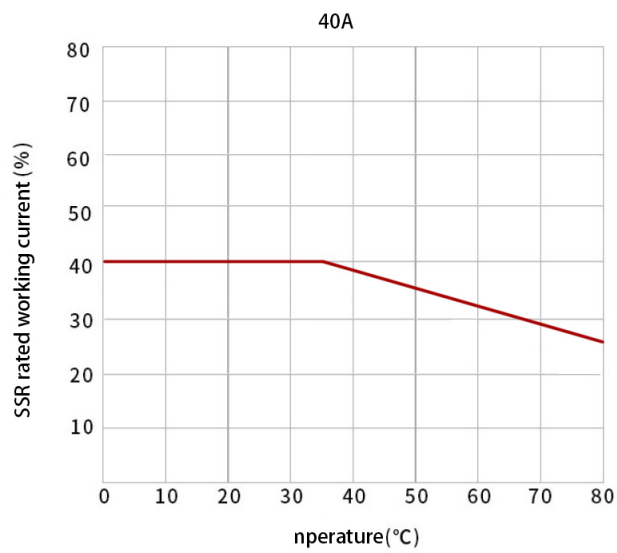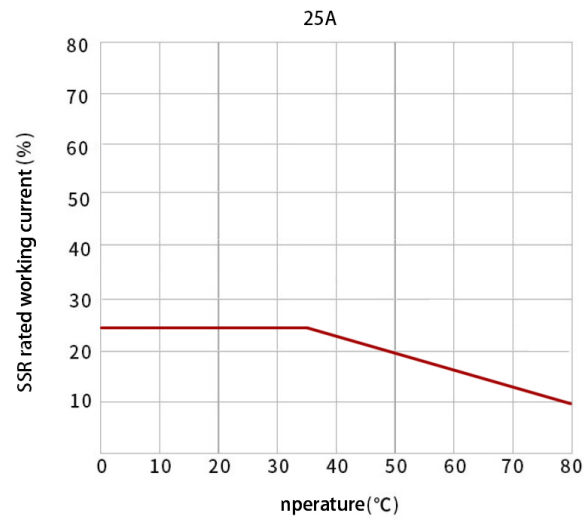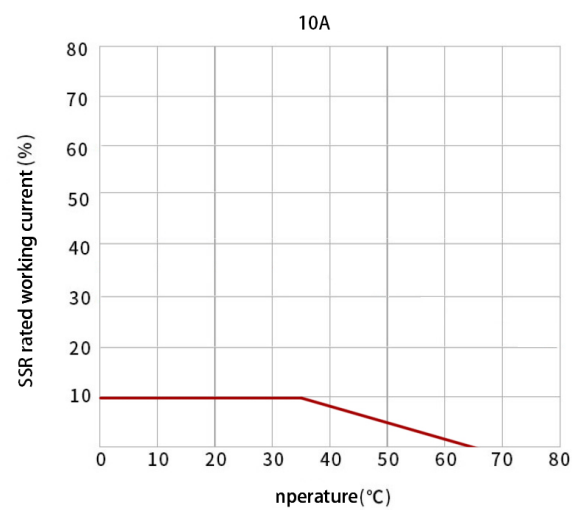

TEMPERATURE

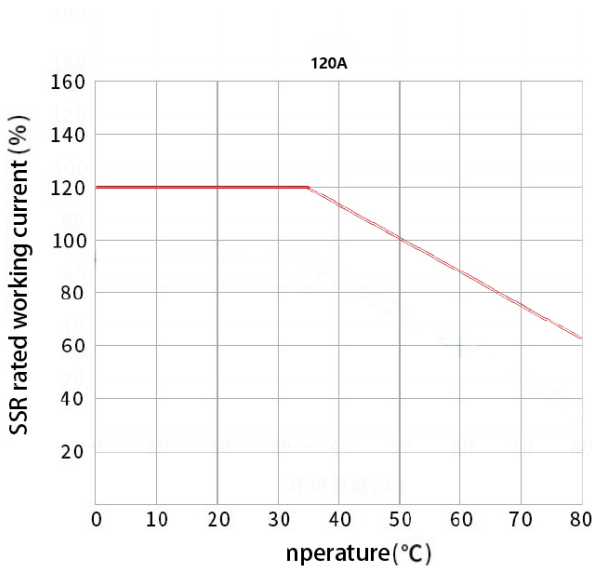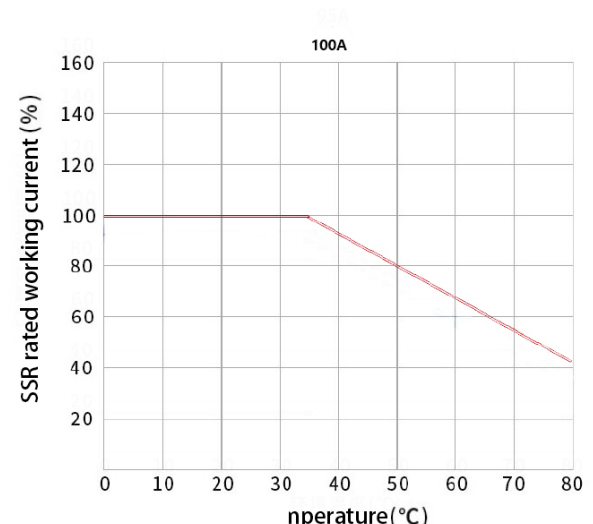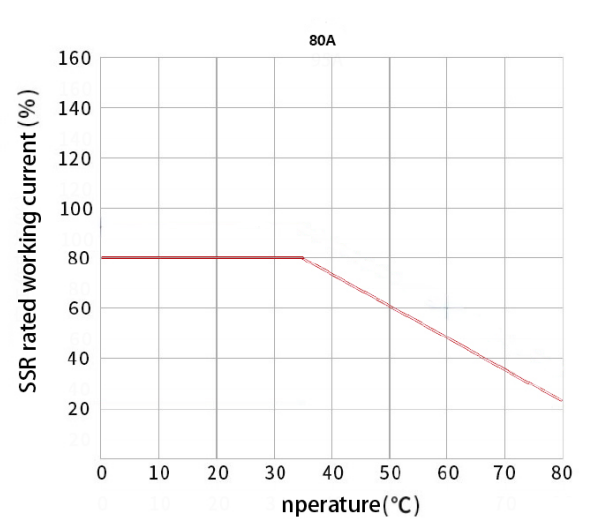

浙江申帝克电气有限公司

Zhejiang Shendike Electric Co., Ltd

全国服务热线: 400-888-9277

天猫: www.Sennidik.tmall.com

Any changes will not be notified separately.

官方网站: www.zcximandun.com

地址: 浙江省乐清市百亨路5号