




SELECTION GUIDE

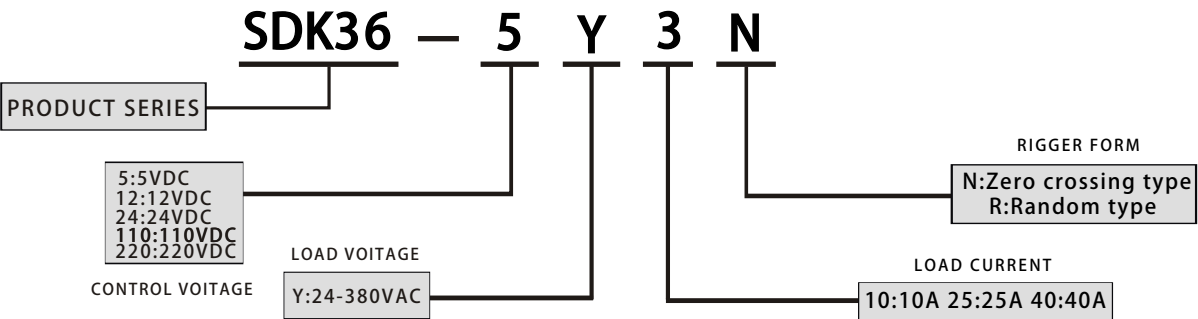

ENTER THE PARAMETERS

INPUT VPLTAGE RANGE	5	[4 – 6]VDC
	12	[9.6 – 14.4]VDC
	24	[19.2 – 28.8]VDC
	110	[110]VAC
	220	[220]VAC
ENSURE THE VOLTAGE IS CONNEATED	5	4VDC
	12	9.6VAC
	24	19.2VAC
	110	110VAC
	220	220VAC
MAXIMUM INPUT CURRENT	DC INPUT:25mA AC INPUT:6.7mA	


OUTPUT PARAMETERS

OUTPUP VOLTAGE RANGE	[24– 380] VAC		
LOAD CURRENT	(0.1 –10) A	(0.1 –25) A	(0.1 –40) A
MAXIMUM SURGE CURRENT (10ms)	512A	1250A	1250A
MAXIMUM OUTPUT LEAKAGE CURRENT	5MA		
MAXIMUM OUTPUT VOLTAGE DROP	1.55Vr.m.s.		
MAXIMUM CONNECTION TIME	ZERO CROSSING TYPE	1/2 PERIOD+1ms	
	RANDOM TYPE	1MS	
MAXIMUN SHUTDOWN TIME	ZERP CROSSING TYPE	1/2 PERIOD+1ms	
	RANDOM TYPE	1ms	
MAXIMUM TRANSIENT VOLTAGE	800Vpk		
RISE RATE OF OFF STATE VOLTAGE INDEX (DV/DT)	500V/ μ s		


OTHER PARAMETERS

DIELECTRIC WITHSTAND	2500VAC, 50Hz/60Hz, 1MIN
POPERATING TEMPERATURE	- 30°C - 80°C
STOREGET TEMPERATURE	- 30°C - 100°C
WEIGHT	ABOUT 385




MECHANICAL SPECIFICATIONS

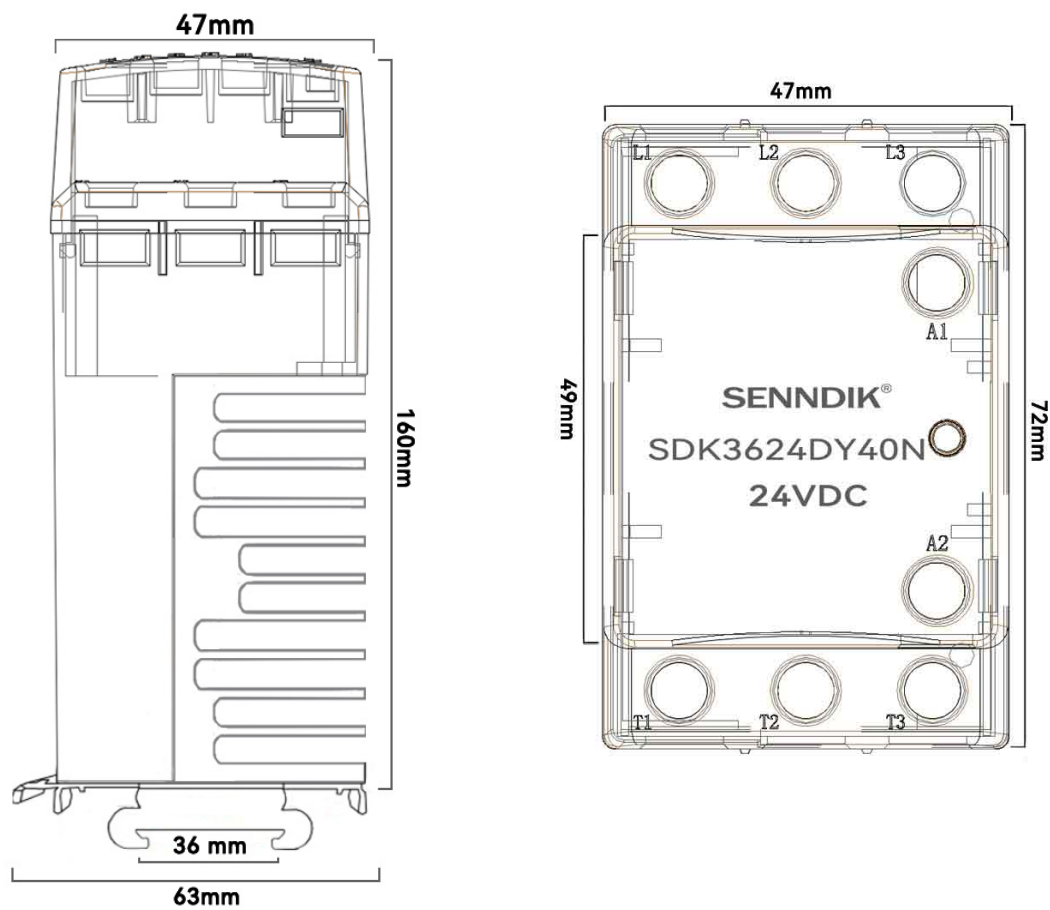

USAGE

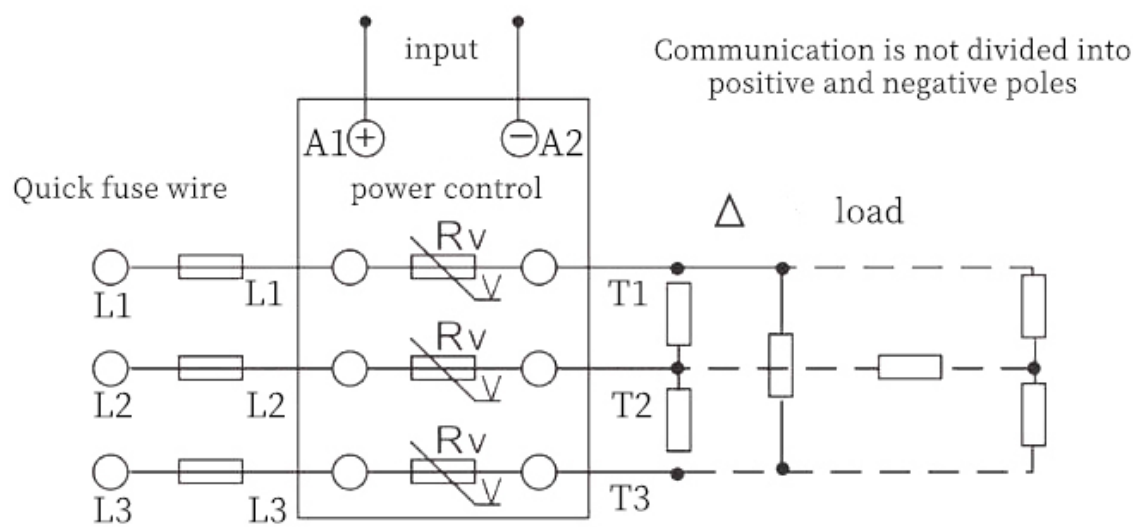

TEMPERATURE

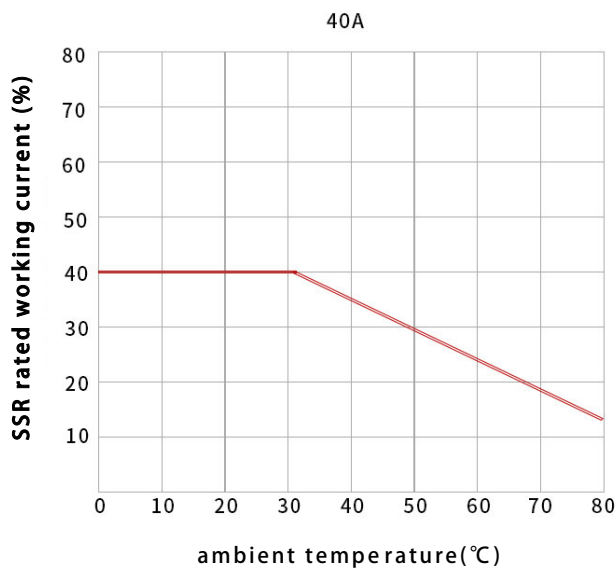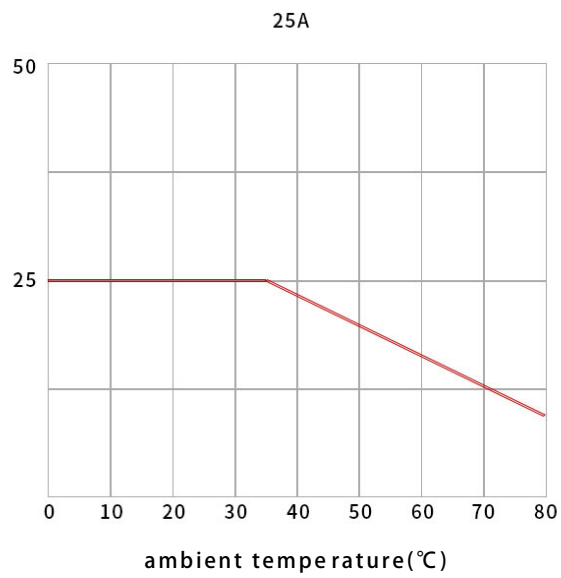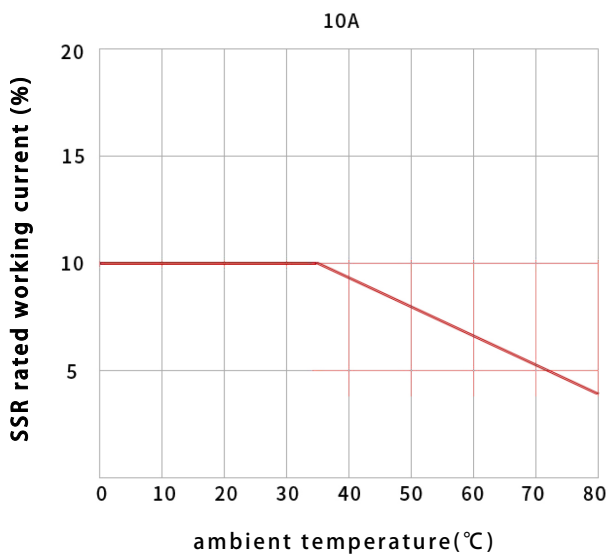

浙江申帝克电气有限公司
Zhejiang Shendike Electric Co., Ltd

全国服务热线: 400-888-9277 Tmall: www.Senndik.tmall.com

official website: www.zcximandun.com

If there are any changes, no further notice will be given