


SENNDIK®


SDA SERIES PCB SOLID STATE RELAY

METAL SHELL WITH HIGH HEAT DISSIPATION

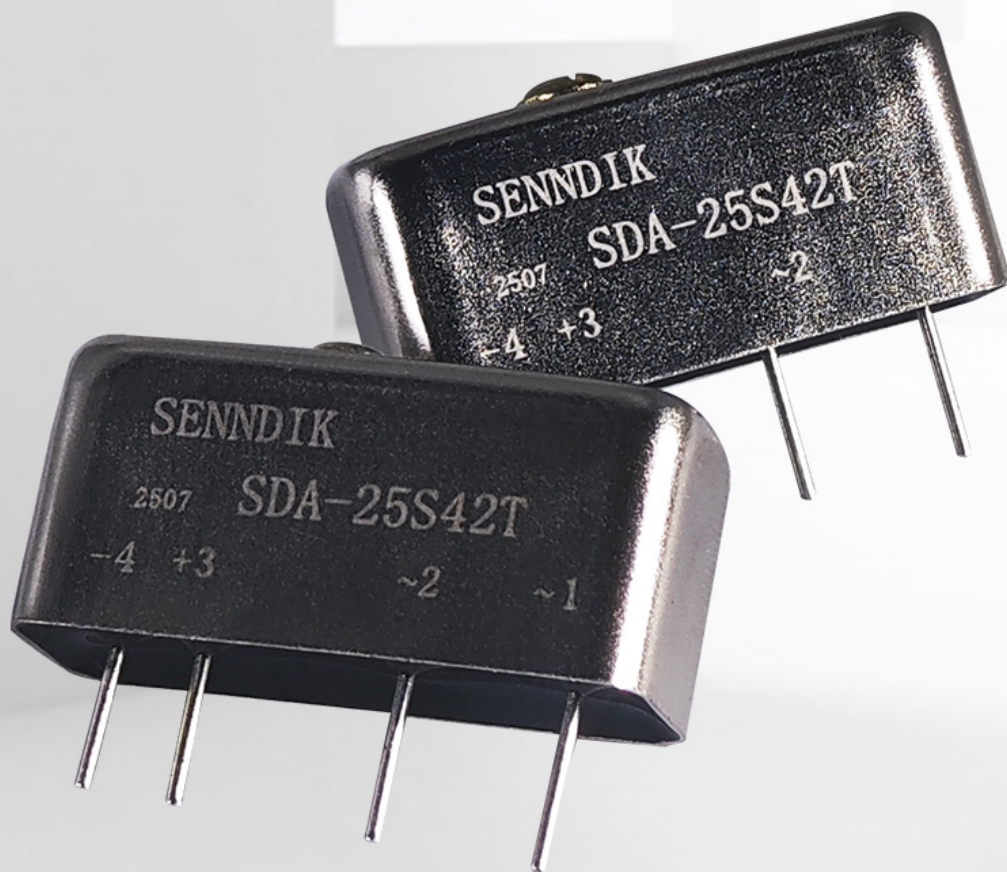

INSTALLATION METHOD OF CIRCUIT BOARD

SELECTION GUIDE

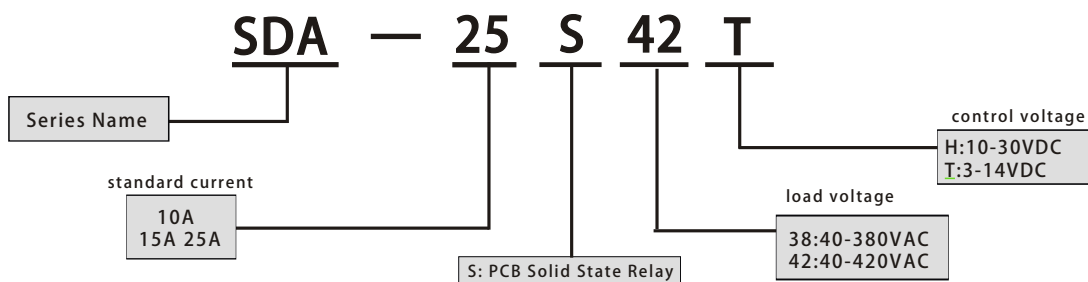

ENTER THE PARAMETERS


input parameters		
Input voltage range	H	[10–30]VDC
	T	[3–14]VDC
Ensure the voltage is connected	H	10VDC
	T	3VDC
Ensure the voltage is turned off	1VDC	
Maximum input current	25mA	

output parameters	10A	15A	25A
Output voltage range	38:[40–380]VAC		42:[40–420]VAC
load current	0.1–10A	0.1–15A	0.1–25A
Maximum surge current (10ms)	120A	160A	240A
Maximum output leakage current	1.5mA		
Maximum output voltage drop	1.55Vr.m.s.		
Maximum connection time	Zero crossing type		1/2 cycle+1ms
	Random type		1ms
Maximum shutdown time	Zero crossing type		1/2 cycle+1ms
	Random type		1ms
Maximum transient voltage	600Vpk		800Vpk
Rise rate of off state voltage index (dv/dt)	500V/μs		


OTHER PARAMETERS

Other parameters	
Dielectric withstand voltage (between input and output)	2500Vrms, 50Hz/60Hz, 1min
vibration	10Hz–55Hz 1.5mmDouble amplitude
impact	80m/s ²
Operating Temperature	-30°C - 80°C
Storage temperature	-30°C - 100°C
humidity	45% - 85% RH
weight	25g




MECHANICAL SPECIFICATIONS

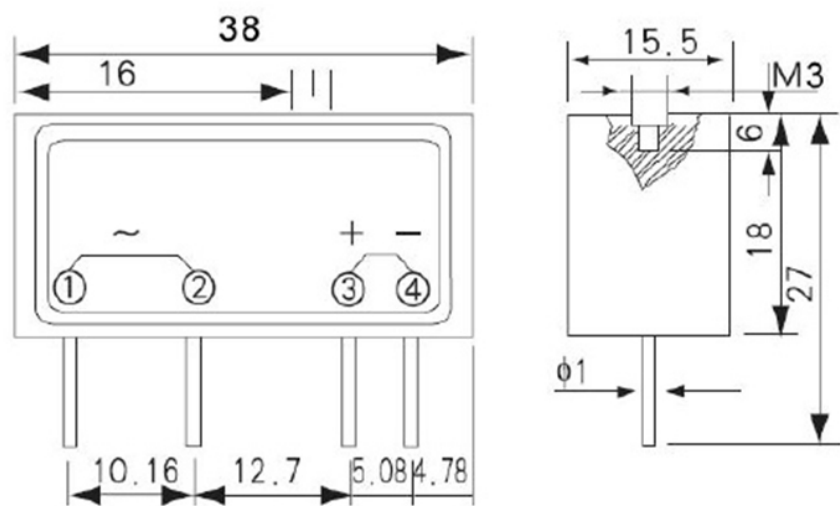

WIRING DIAGRAM

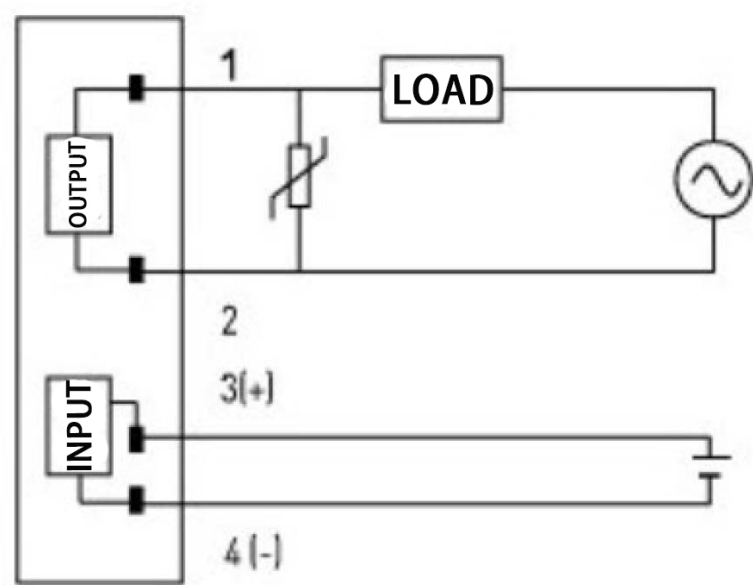

TEMPERATURE

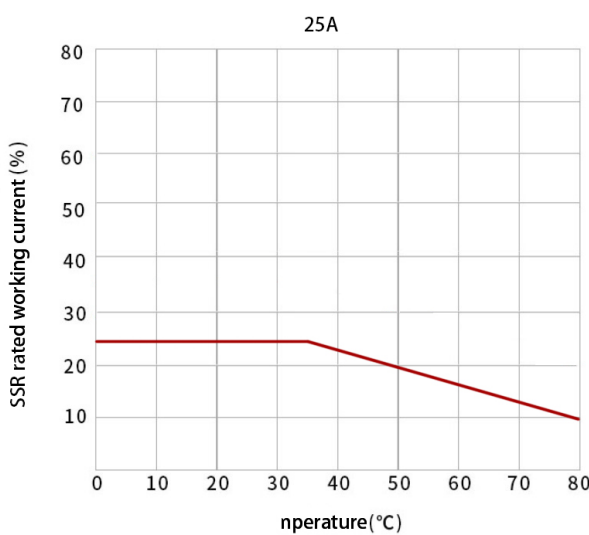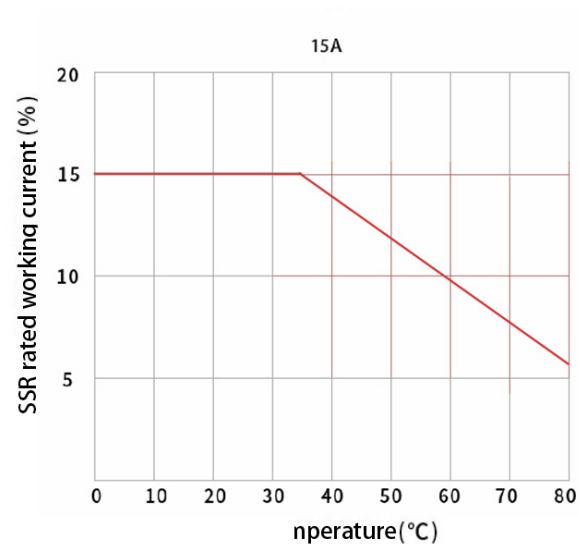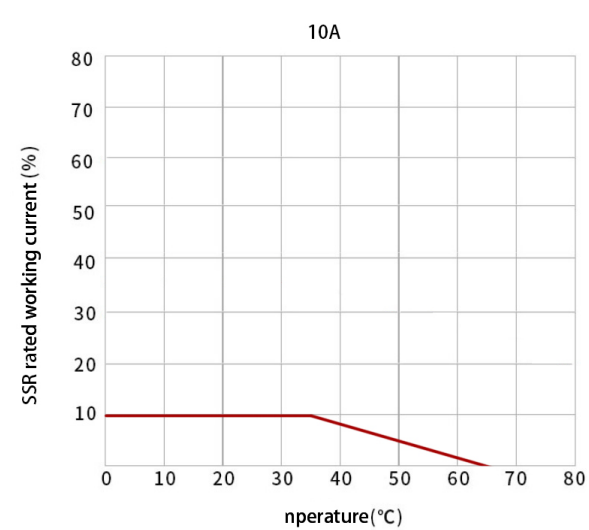

浙江申帝克电气有限公司

Zhejiang Shendike Electric Co., Ltd

全国服务热线: 400-888-9277

天猫: www.Sennidik.tmall.com

若有更改, 恕不另行通知

官方网站: www.zcximandun.com

地址: 浙江省乐清市百亨路5号