



DEALER BEST PRACTICE SERIES

Schematics Work Station

Application Maintenance Site Management Component Rebuild Component Life Management Safety MARC Management

Schematics Work Station 0

1.0 Introduction 1

2.0 Best Practice Description..... 1

3.0 Implementation Steps 2

4.0 Benefits..... 2

5.0 Resources Required 3

6.0 Supporting Attachments / References 4

7.0 Related Best Practices 5

8.0 Acknowledgements..... 5

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices”. Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

1.0 Introduction

This Best Practice introduces a simple workstation that has improved both the efficiency of workshop schematic diagnosis, tidiness of the workshop bays and office, and helped protect printed and laminated schematic diagrams.

Schematics are frequently used in the repair bays to diagnose system faults. The workstation provides a dedicated, well-lit working surface, protects and houses laminated schematics (organized by model), plus has eliminated lost time and frustration brought about by trying to find the required schematic diagrams.

2.0 Best Practice Description

As depicted in Illustration 1, the workstation has a sloped work surface that is illuminated from above. This surface is dedicated for schematic work and is at the height requested by the technicians. The station includes 27 horizontally positioned storage canisters for housing the schematics by machine model. These canisters are made from 100 mm PVC threaded end water pipe. Threaded pipe ends chained to the front panel act as end caps. Beneath the canisters are two cupboards for extra storage of manuals and spare schematics. The workstation has lockable wheels but, in this situation, remains dedicated to the auto-electrician area.



THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Schematics Work Station

DATE
1/13/2015

CHG
NO
02

NUMBER
0707-2.14-1088



3.0 Implementation Steps

- Build workstation as per diagram in section 6.0 below.
- Print and laminate schematics in the largest size practical.
- Dedicate a location in the workshop for the workstation.

4.0 Benefits

Prior to this workstation, schematics were hung from a metal frame on newspaper-style clamps. This consumed a large area of the workshop office or bay space. It was untidy and often resulted in lost time by having to walk to the office from the repair bay and then try to find the required schematics. The new workstation has realized the following benefits:

- Less space required for storage
- Laminated schematics are better protected and no longer require folding
- Schematics are stored by model
- Dedicated and lit schematic reviewing surface
- Workstation is now located in the repair bay area (rather than the office)
- Technicians are happier with the new arrangement. This should not be underestimated.


THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Schematics Work Station	DATE 1/13/2015	CHG NO 02	NUMBER 0707-2.14-1088
-------------------------	-------------------	-----------------	--------------------------

5.0 Resources Required

The workstation costs approximately AUD \$4,500 to construct. Refer to the diagrams of the workstation for dimensions and some basic instructions. Below is the required bill of materials:

- 27 lengths of 100 mm Diameter PVC water pipe with one treaded end
- 27 x 100 mm diameter threaded end caps
- 27 x chains to connect end caps to canisters
- 3 mm black steel as per diagrams
- 6mm rivet nuts as per attached
- Fluorescent tube for lighting with associated power supply and sealed plug
- 1" steel RHS for lighting bracket
- RHS for strengthening as per diagrams
- 4 x heavy duty castors / wheels
- Rubber matting for bench top
- Lock, handles, hinges & urethane door seals for cupboards

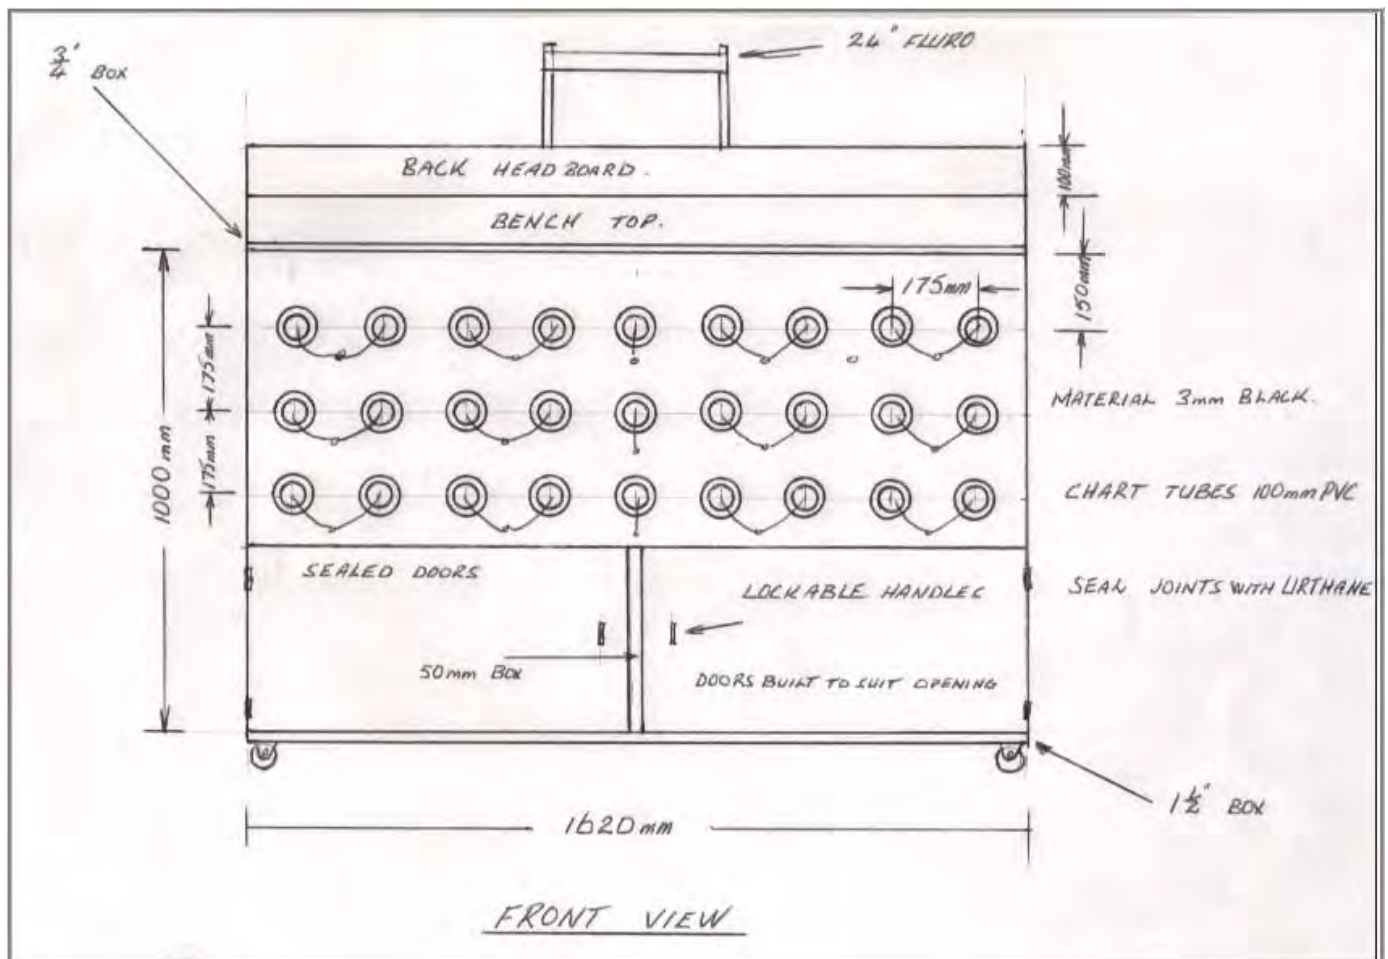


THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Schematics Work Station

DATE
1/13/2015

CHG
NO
02

NUMBER
0707-2.14-1088

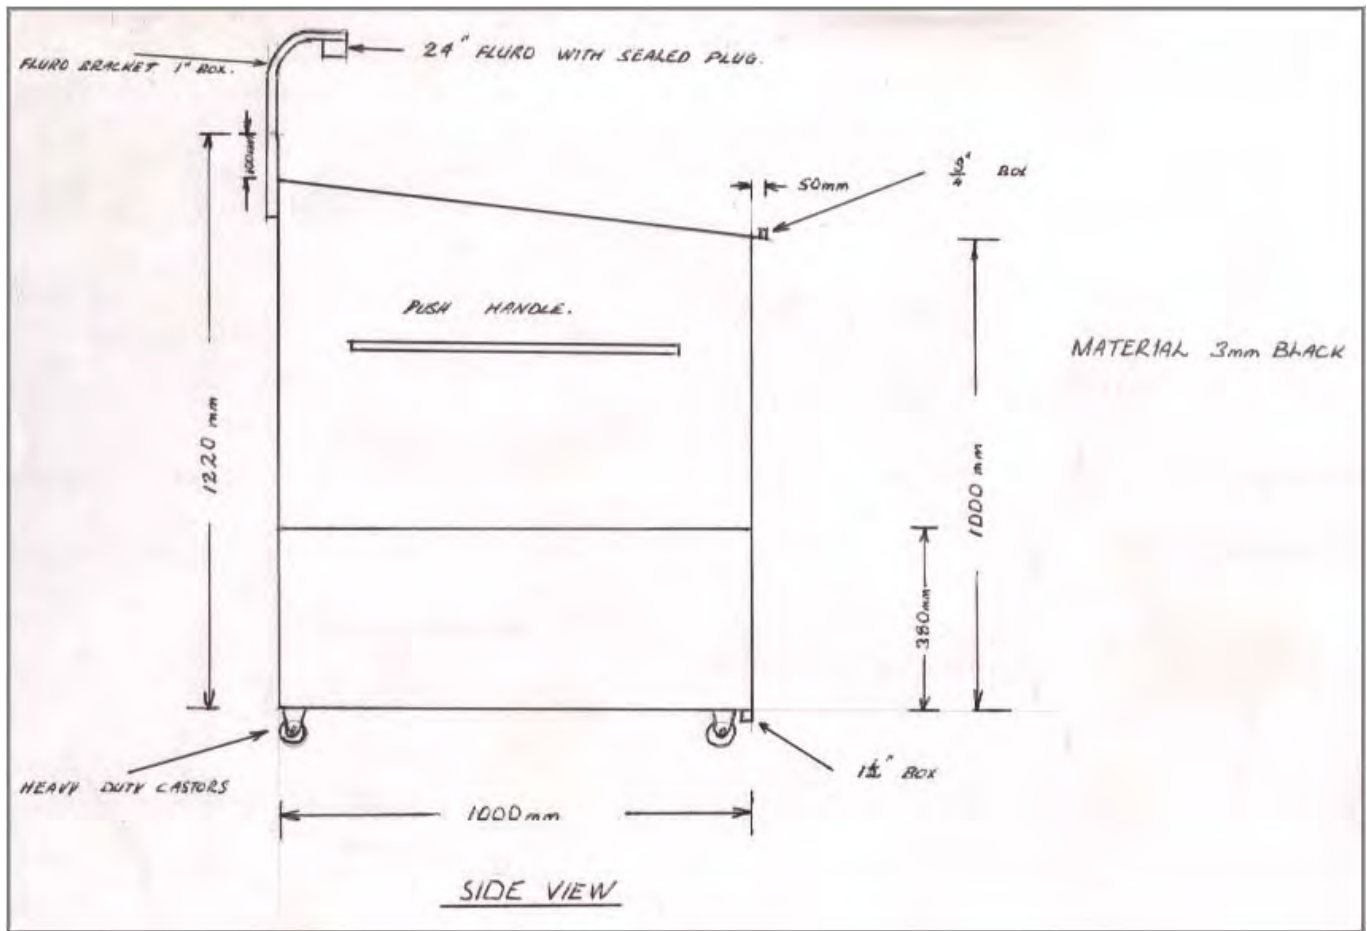

SCHEMATICS CABINET IS CONSTRUCTED FROM 3mm BLACK STEEL.

CHART TUBES ARE CONSTRUCTED FROM 100mm PVC PIPE USING A BLANKING CAP AT THE BACK WITH A 6mm RIVET NUT IN THE CENTER TO SECURE IT TO THE BACK WALL. THE FRONT HAS A THREADED END SO THAT THE END CAP CAN BE SCREWED ON.

24" FLURO MUST BE FITTED WITH A SEALED PLUG.

THE OPENING FOR THE DOORS SHOULD HAVE A 1" LIP ON THE INSIDE OF THE CABINET SO THAT THE DOORS WILL SEAL.

6.0 Supporting Attachments / References

- Refer to the drawing of the workstation above

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Schematics Work Station	DATE 1/13/2015	CHG NO 02	NUMBER 0707-2.14-1088

7.0 Related Best Practices

None.

8.0 Acknowledgements

This Best Practice written by:

Tim Mansfield
Equipment Management Consultant
Caterpillar Global Mining
Australia
tmansfield@cat.com
+61 3 9953 9230

Please contact the author for further details or information regarding this Best Practice.

Special mention must be made of Hastings-Deering Australia for their willingness to share this Best Practice. In particular, we wish to recognize:

Matt Pacey
Team Leader
Hastings-Deering
Maintenance Department
Queensland Australia

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Schematics Work Station	DATE 1/13/2015	CHG NO 02	NUMBER 0707-2.14-1088
-------------------------	-------------------	-----------------	--------------------------