

xantech®

MODEL

284D


Dual Designer Emitter

INSTALLATION INSTRUCTIONS




DESCRIPTION

The 284D Designer Emitter each contain a tiny infrared LED housed in a miniature, designer styled, black appearing, injection molded plastic shell. They emit IR (infrared) control signals sent to them by IR receivers or other Xantech controllers. The 284Ds can be installed directly on the IR sensor window of the controlled devices or other suitable location.

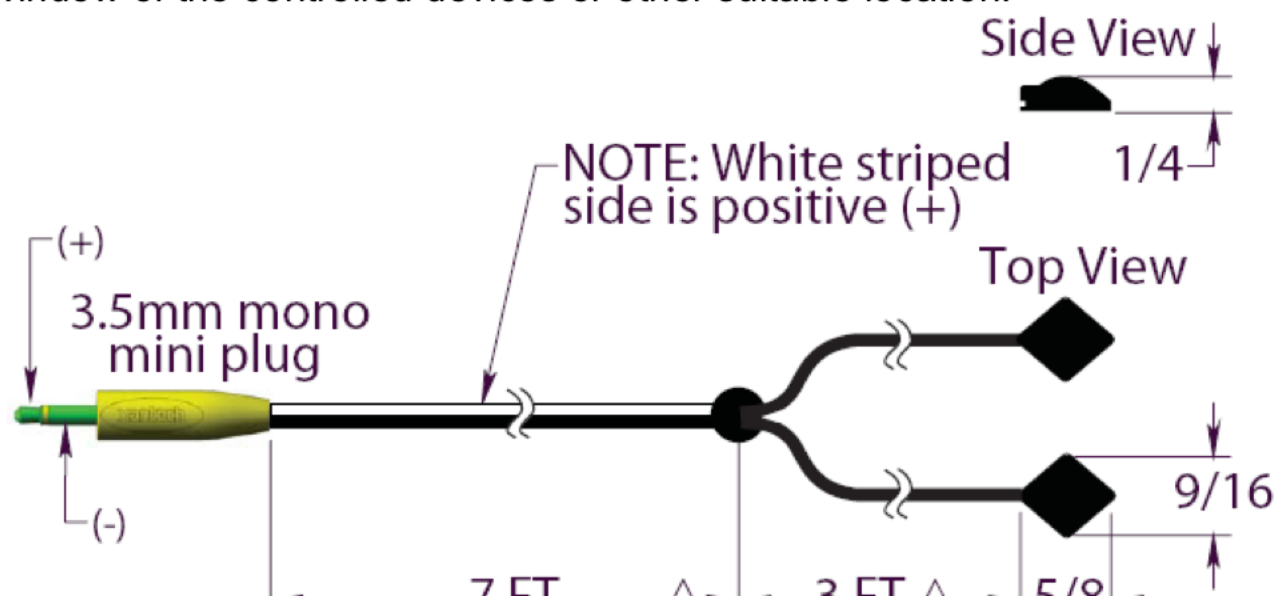

ATTACHING THE EMITTERS TO OTHER LOCATIONS

- The high output from the curved top side of the emitter permits control from as much as 3 feet away when on the axis of the IR sensor window of the component.
- This allows placement on surfaces just below, above or in front of the controlled components for a more pleasing aesthetic appearance.
- Choose a location on a cabinet shelf, door, etc., as shown in Figs. 3b, c and d. Be sure the edge of the component does not block the IR signal (Figs. 3c and d).

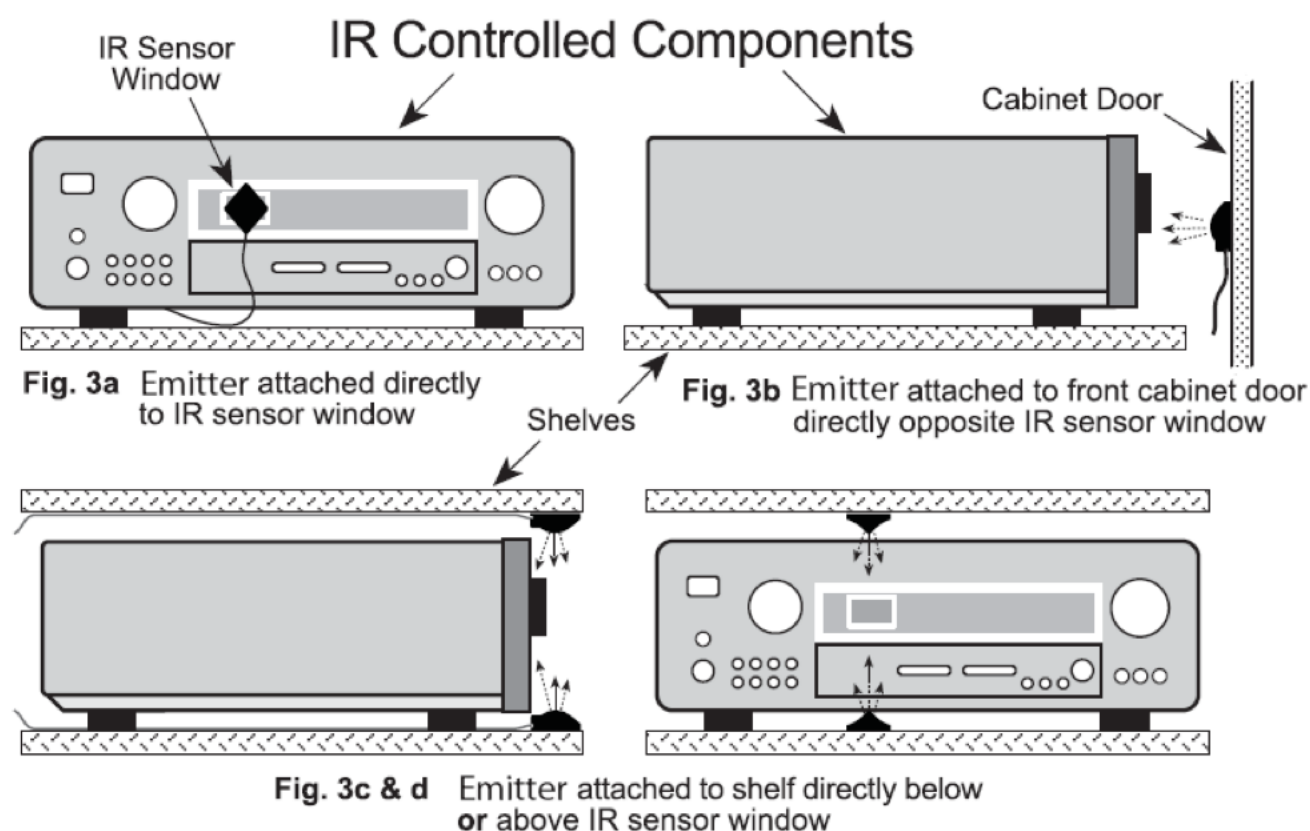

CAUTION: Cabinet door locations (Fig. 3b) will usually result in interruption of the IR control signals to the components when the door is open.

CONNECTING THE EMITTERS

- Simply insert the mono mini plug of the 284D emitter into the "EMITTERS" or "OUT" jacks on any of the Xantech Connecting Blocks or Controllers.
- **CAUTION: DO NOT plug emitters into the IN/OUT or HIGH OUT jacks on the 790-00 and 791-44 Connecting Blocks.** To do so will