

IO-6000

8-channel cinema
DSP amplifier





The IO Series marks a new era of simplicity and convenience for professional audio installations. These amplifiers feature state-of-the-art DSP technology and incorporate MAG Audio's unique amplifier connection and control architecture for seamless system integration and operation.


Built on highly efficient Class D amplification, IO amplifiers support 16 AES3 input channels, making them ideal for crafting high-performance installation sound systems. The Phoenix connectors ensure effortless speaker wiring, while additional analog inputs provide easy integration for a wide range of signal sources.

Control is at your fingertips with the intuitive WebUI, granting one-stop access to all system functions. This includes a fully customizable input-to-output matrix, room EQ, automation tools, and much more.

The IO-6000 model exemplifies efficiency, offering 8 output channels at 750W into 4 Ohm, delivering powerful performance with uncompromising reliability.

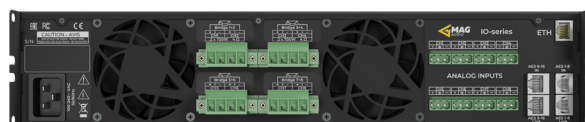

DIMENSIONS

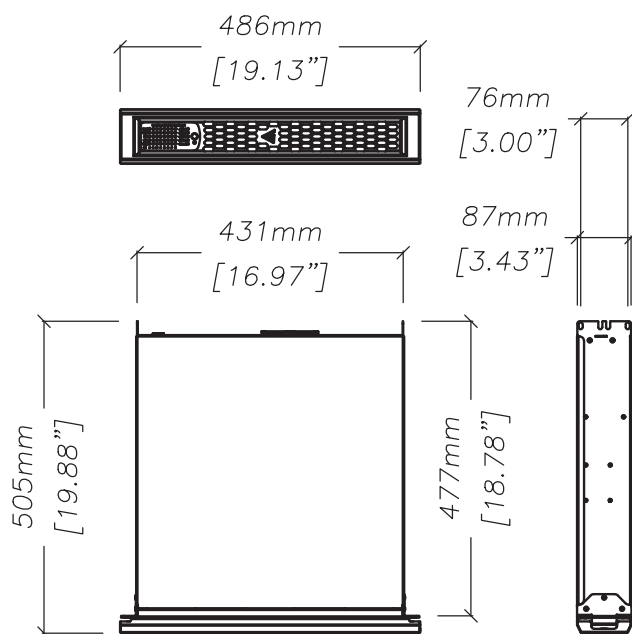

SAFETY INSTRUCTIONS

1. Do not use this equipment near water.
2. Clean only with dry cloth.
3. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
4. Do not use near heat sources such as stoves, heat registers, radiators or other equipment (including amplifiers) that produces heat.
5. Do not use the unit near open fire sources.
6. Connect the unit only to the electric network with grounding. Use only electric plugs that provide grounding.
7. Protect the power cord from being walked on, pinched, or otherwise damaged.
8. Use only accessories specified by the manufacturer.
9. Unplug this unit during lightning storms or when unused for long periods of time.
10. Refer all servicing to qualified service personnel. Servicing is required when the system has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the unit, the unit has been exposed to rain or moisture, does not operate normally, or has been dropped.
11. WARNING - TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS SYSTEM UNIT TO RAIN OR MOISTURE.

SPECIFICATIONS

Number of channels	8	
Power rating	4 Ohm	8 x 750 W
	8 Ohm	8 x 400 W
	16 Ohm	8 x 200 W
	8 Ohm bridge	4 x 1400 W
	16 Ohm bridge	4 x 700 W
Frequency range	20 Hz - 20 kHz	
Amplifier	Class D high efficiency	
Input sensitivity	+16dBu / +4dBu selectable	
Maximum input level	+22dBu / 10 dBu	
Input impedance	10 kOhm unbal., 20 kOhm bal.	
DSP	Full DANA compatibility 24bit 96kHz	
DSP functions	- Input gain	
	- Input-to-output matrix	
	- Room graphic, parametric	
	- EQ, Hi and Lo shelf	
	- Delay	
	- Speaker presets	
	- Output gain	
	- Master volume, mute, stand by	
Crosstalk separation	100 dB @ 1 kHz	
	<0.5%	
THD	<0.5%	
Power consumption, 1/8 of max output power @ 8 Ohm	750 W	
Damping factor, 8 Ohm	> 500 @ 1kHz	
S/N ratio, analog	100 dB	
Connectors	- 8 x 3-pin Phoenix analog input	
	- 4 x 4-pin Phoenix speaker output	
	- RJ-45 Ethernet	
	- RJ-45 AES 1-8 input	
	- RJ-45 AES 9-16 input	
	- RJ-45 AES 1-8 link	
	- RJ-45 AES 9-16 link	
Dimensions (W x H x D)	486 x 87 x 505 mm, 2U	
	Net weight	10 kg