


### Quick Reference Guide

#### Introduction

The Nice 4x4 HDBaseT matrix offers unprecedented performance and value for the custom installation market. The EL-4KM-V44-18G is a HDMI 2.0 4K 60Hz 4:4:4 HDCP 2.2 matrix utilizing CSC technology to deliver HDMI, bi-directional IR and PoC up to lengths of 70m over a single CAT cable. The matrix also provides advanced features including simultaneous HDBaseT / HDMI on output 1, video down conversion on HDBaseT outputs and a web browser interface module for control and configuration of the matrix.


#### EL-4KM-V44-18G Front Panel

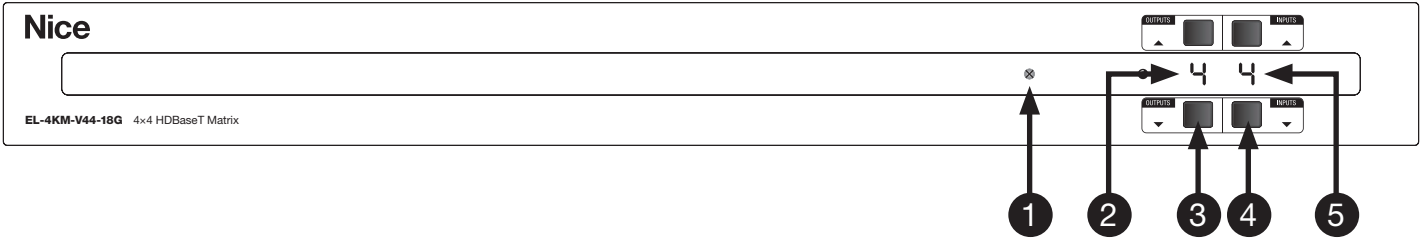

|                            |                                                                                                        |
|----------------------------|--------------------------------------------------------------------------------------------------------|
| 1. IR Receiver             | Built in IR sensor for IR pass through.                                                                |
| 2. Output LCD              | Shows the currently selected output.                                                                   |
| 3. Output Up / Down Button | Press to adjust the selected output up or down                                                         |
| 4. Input Up / Down Button  | Press to adjust the selected input up or down / Press and hold Input Up to power the matrix on or off. |
| 5. Input LCD               | Shows the currently selected input                                                                     |

**Note:** Press and hold Output Up and Input Down for 10 seconds to factory reset the matrix.

#### EL-4KM-V44-18G Rear Panel

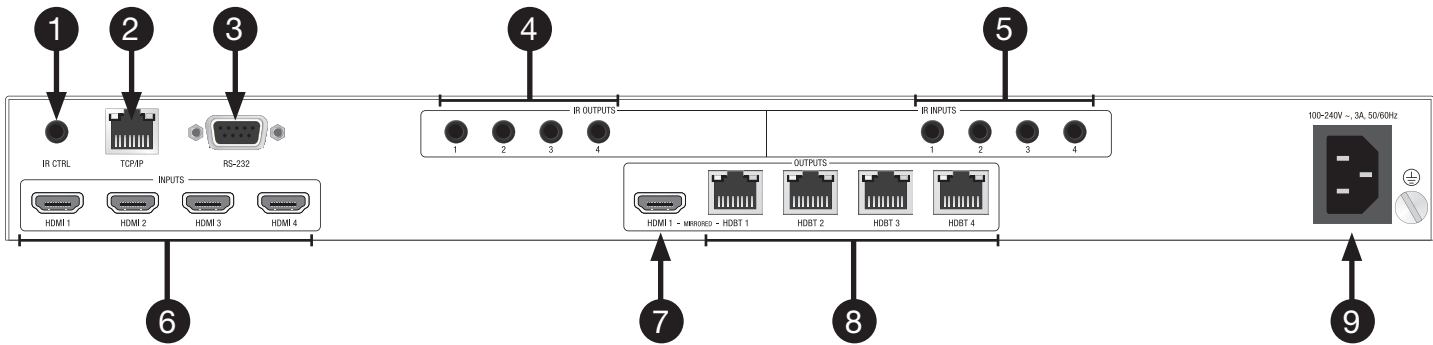

|                       |                                                                                                                                           |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| 1. IR Control Input   | 3.5mm stereo connector to connect to Nice 5V 3.5mm IR receiver for IR control of the matrix                                               |
| 2. TCP/IP             | RJ45 connector for TCP/IP and Web GUI control of the matrix                                                                               |
| 3. RS-232             | DB9 connector for RS-232 control of the matrix                                                                                            |
| 4. IR Receiver Output | 3.5mm mono connector to connect to Nice 5V 3.5mm IR emitter. Used for local Source control                                                |
| 5. IR Receiver Input  | 3.5mm stereo connector to connect to Nice 5V 3.5mm IR receiver or Control Processor. Used to extend IR from Matrix to HDBaseT Outputs 1-4 |
| 6. HDMI Inputs        | Connect to source devices                                                                                                                 |
| 7. HDMI Output        | Connect to display device                                                                                                                 |
| 8. HDBaseT Outputs    | RJ45 HDBaseT port to connect to the HDBaseT input port of the compatible Nice HDBaseT receiver                                            |
| 9. IEC Power Socket   | Use supplied IEC power cable                                                                                                              |

## RS-232 Configuration

The RS-232 port is used for configuration and control of the product, as well as pass through of RS-232 commands to a compatible Nice HDBaseT receiver / matrix device. For a complete RS-232 command list please see the EL-4KM-V44-18G user manual - available to download from [www.niceforyou.com](http://www.niceforyou.com). The default RS-232 communication settings are:

|                         |                    |                    |                         |
|-------------------------|--------------------|--------------------|-------------------------|
| <b>Baud Rate:</b> 57600 | <b>Data Bit:</b> 8 | <b>Stop Bit:</b> 1 | <b>Parity Bit:</b> none |
|-------------------------|--------------------|--------------------|-------------------------|

## Specifications


|                                      |                                                                |
|--------------------------------------|----------------------------------------------------------------|
| <b>Video Input Connectors</b>        | 4 x HDMI Type A, 19-pin, female                                |
| <b>Video Output Connectors</b>       | 1 x HDMI Type A, 19-pin, female, 4 x HDBaseT RJ45 connectors   |
| <b>Audio Input Connectors</b>        | 1 x Analog audio L/R (3.5mm stereo Jack), 1 x Optical (S/PDIF) |
| <b>RS-232 Serial Port</b>            | 1 x 3-pin phoenix connector                                    |
| <b>IR Input Ports</b>                | 5 x 3.5mm stereo jack                                          |
| <b>IR Output Ports</b>               | 4 x 3.5mm mono jack                                            |
| <b>Rack Mountable</b>                | 1U rack height, rack ears included                             |
| <b>Casing Dimensions (W x H x D)</b> | 437mm x 44mm x 377mm (without feet)                            |
| <b>Dimensions (W x H x D)</b>        | 437mm x 53mm x 384mm (without feet)                            |
| <b>Shipping Weight</b>               | 6.25kg                                                         |
| <b>Operating Temperature</b>         | 23°F to 122°F (-5°C to +50°C)                                  |
| <b>Storage Temperature</b>           | -13°F to 158°F (-25°C to +70°C)                                |
| <b>Power Supply</b>                  | Internal 100-240V AC 3A                                        |
| <b>HDBT Power Output</b>             | 24V DC 0.8A Per Port                                           |

## Package Contents

- 1 x Rack mounting kit
- 4 x Mounting feet and screws
- 1 x Remote control
- 4 x IR emitters
- 5 x IR receivers
- 1 x RS-232 control cable
- 1 x IR control cable - 3.5mm-3.5mm cable
- 1 x Quick Reference Guide
- 4 x IEC Power cables (US, UK, EU & AU)

**NOTE:** Battery not included. CR2025 battery required for remote control.

# Example Schematic EL-4KPM-V88-A268-18G

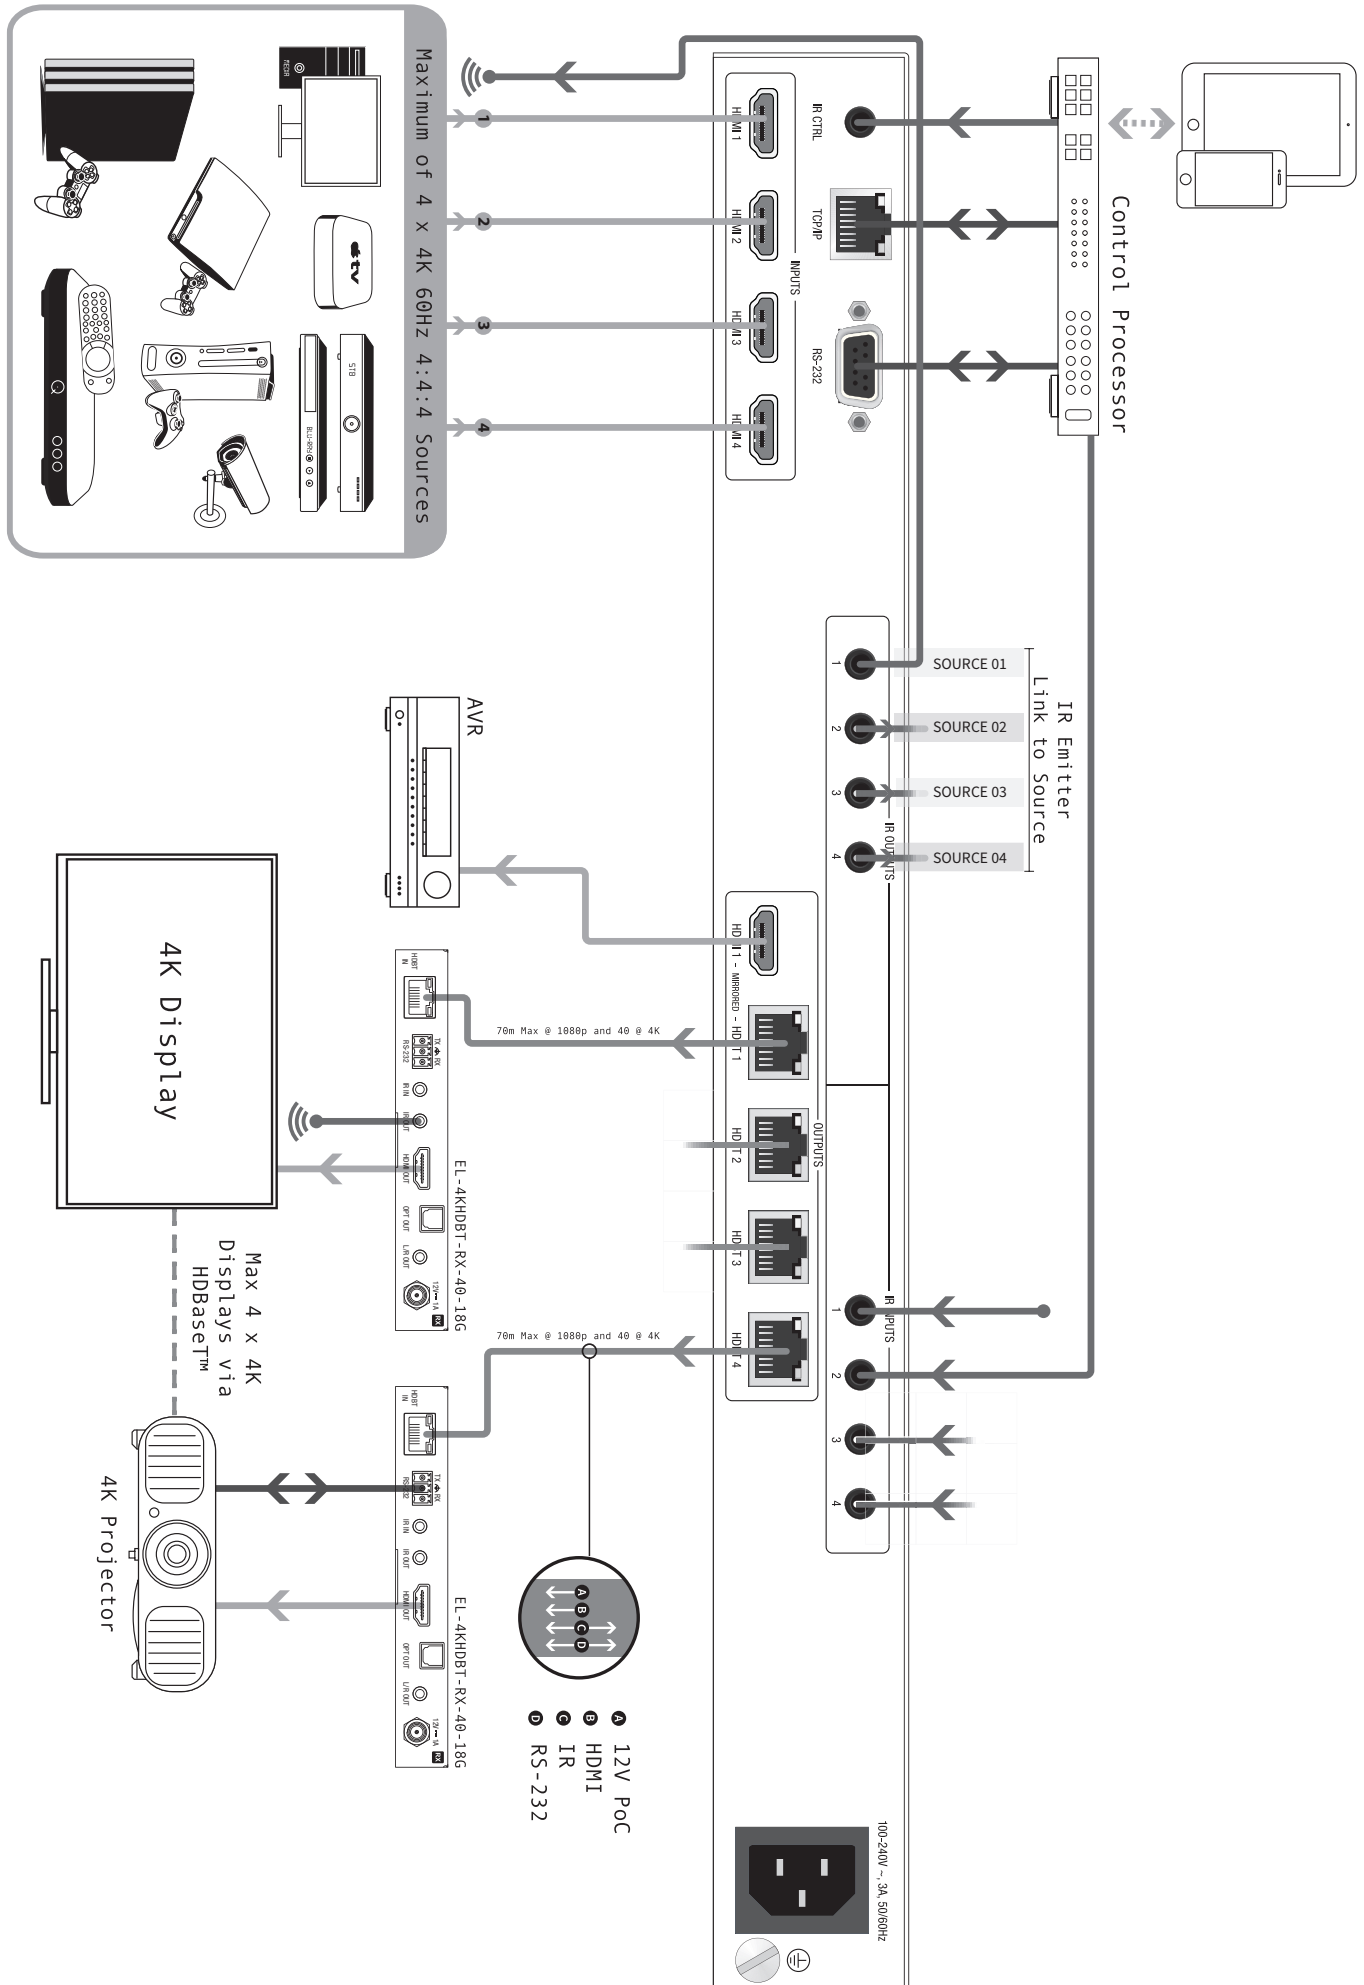

## Certifications

### FCC Notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**CAUTION** - changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### CANADA, INDUSTRY CANADA (IC) NOTICES

This Class B digital apparatus complies with Canadian ICES-003.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

### CORRECT DISPOSAL OF THIS PRODUCT

This marking indicates that this product should not be disposed with other household wastes. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmentally safe recycling.

## Information

- A.** Read these instructions – All the safety and operating instructions should be read before this product is operated.
- B.** The apparatus should be connected to a mains socket outlet with a protective earthing connection.
- C.** The socket-outlet shall be installed near the equipment and shall be easily accessible.
- D.** Do not ingest battery, Chemical Burn Hazard
- E.** This product contains a coin / button cell battery. If the coin / button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- F.** Keep new and used batteries away from children.
- G.** If the battery compartment does not close securely, stop using the product and keep it away from children.
- H.** If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- I.** **WARNING:** Please refer the information on exterior bottom enclosure for electrical and safety information before installing or operating the apparatus.
- 
- A.** Lisez ces instructions - Toutes les instructions de sécurité et d'utilisation doivent être lues avant d'utiliser ce produit.
- B.** L'appareil doit être raccordé à une prise de courant avec une mise à la terre de protection.
- C.** La prise de courant doit être installée à proximité de l'appareil et doit être facilement accessible.
- D.** Ne pas ingérer la batterie, risque de brûlure chimique
- E.** Ce produit contient une pile bouton. Si la pile bouton est avalée, elle peut provoquer de graves brûlures internes en seulement 2 heures et peut entraîner la mort.
- F.** Conservez les piles neuves et usagées hors de portée des enfants.
- G.** Si le compartiment à piles ne ferme pas correctement, cessez d'utiliser le produit et tenez-le hors de portée des enfants.
- H.** Si vous pensez que des piles ont pu être avalées ou placées à l'intérieur d'une partie du corps, consultez immédiatement un médecin.
- I.** **AVERTISSEMENT :** Avant d'installer ou d'utiliser l'appareil, veuillez vous référer aux informations figurant sur le boîtier inférieur extérieur pour les informations relatives à l'électricité et à la sécurité.

Nice

Niceforyou.com

©2023 Nice North America LLC.  
All rights reserved.

### Technical Support:

800-421-1587

### Technical Support Hours:

M – F, 6:00 a.m. – 4:00 p.m. PST

### Nice North America

c/o Customer Service  
5919 Sea Otter Place, Suite 100  
Carlsbad, CA 92010