Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

IS : 2551 - 1982

Indian Standard

(Reaffirmed 2005)
(Reaffirmed 2015)
(Reaffirmed 2020)

DANGER NOTICE PLATES

(*First Revision*)

First Reprint NOVEMBER 1992

UDC 621·3—783·2 ; 614·8·013 : 003·62

© *Copyright* 1983

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

Gr 3 *May* 1983

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151

Indian Standard

DANGER NOTICE PLATES

(First Revision)

Code of Practice for Power Installation and Maintenance Sectional Committee, ETDC 20

Chairman	*Representing*
SHRI P. C. MANKODI*	Gujarat Electricity Board, Vadodara
Members	
SHRI B. C. ALVA	Karnataka Electricity Board, Bangalore
SHRI T. N. R. RAO (*Alternate*)	
SHRI M. J. ANANDAMURTHY	Chief Electrical Inspector to the Government of Tamil Nadu, Madras
ELECTRICAL INSPECTOR (TECHNICAL) TO THE GOVERNMENT OF TAMIL NADU (*Alternate*)	
SHRI P. D. BAGADE	Tata Consulting Engineers, Bombay
SHRI R. C. BAJPAI (*Alternate*)	
SHRI V. S. BHATIA	Siemens India Ltd, Bombay
SHRI K. K. PANT (*Alternate*)	
SHRI K. V. CHAUBAL	The Federation of Electricity Undertakings of India, Bombay
SHRI K. S. JOSHI (*Alternate*)	
CHIEF ELECTRICAL ENGINEER	Railway Board (Ministry of Railways)
DEPUTY DIRECTOR STANDARDS (ELEC)-IV, RDSO (*Alternate*)	
CHIEF ENGINEER (ELEC)-I	Central Public Works Department, New Delhi
SURVEYOR OF WORKS (ELEC)-I (*Alternate*)	
SHRI B. L. DESHPANDE	Electrical Engineer to the Government of Maharashtra, Bombay
SHRI DEVENDER NATH	Larsen & Toubro Ltd, Bombay
SHRI T. P. R. SARMA (*Alternate*)	

(*Continued on page* 2)

*Shri P. C. Mankodi was the Chairman for the meeting in which this standard was finalized.

© *Copyright* 1983
BUREAU OF INDIAN STANDARDS
This publication is protected under the *Indian Copyright Act* (XIV of 1957) and reproduction in whole or in part by any means except with written permission of the publisher shall be deemed to be an infringement of copyright under the said Act.

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

(*Continued from page* 1)

Members	*Representing*
SHRI K. W. DHARMADHIKARI	Jyoti Ltd, Vadodara
SHRI G. L. DUA SHRI S. K. SETHI (*Alternate*)	Rural Electrification Corporation Ltd, New Delhi
SHRI D. J. HASTAK	Maharashtra State Electricity Board, Bombay
MEMBER (HYDRO-ELECTRIC) DIRECTOR (HED)-I (*Alternate*)	Central Electricity Authority, New Delhi
SHRI D. R. NEELAPPA REDDY SHRI G. S. N. MURTHY (*Alternate*)	NGEF Ltd, Bangalore
SHRI K. P. R. PILLAI SHRI C. R. R. MENON (*Alternate*)	Fact Engineering & Design Organization, Udyogamandal
LT-COL B. B. RAJPAL SHRI S. K. SHANGARI (*Alternate*)	Engineer-in-Chief's Branch, Army Headquarters (Ministry of Defence)
SHRI RANES RAY CHOUDHURI SHRI L. E. D. CRUZ (*Alternate*)	Engineering Construction Corporation Limited, Bombay
REPRESENTATIVE SHRI R. CHAKRAVARTY (*Alternate* I) SHRI G. L. PAHWA (*Alternate* II)	Bharat Heavy Electricals Ltd, Secunderabad
SHRI B. M. SAMANT SHRI V. T. WARANG (*Alternate*)	The Bombay Electric Supply & Transport Undertaking, Bombay
SHRI I. C. SANGER SHRI P. S. SAWHNEY (*Alternate*)	Delhi Electric Supply Undertaking, New Delhi
SHRI SARDUL SINGH SHRI D. S. UPPAL (*Alternate*)	Chief Electrical Inspector, Government of Punjab, Chandigarh
SHRI V. SATHYANATHAN SHRI S. KRISHNARAJ (*Alternate*)	Tamil Nadu Electricity Board, Madras
SHRI R. SATYABAL SHRI K. K. MANDAL (*Alternate*)	Tariff Advisory Committee, General Insurance Association of India, Bombay
DR T. C. SIDHAN	Chief Electrical Inspector, Government of Kerala, Trivandrum
SHRI H. K. SITARAM SHRI S. K. PALIT (*Alternate*)	The Calcutta Electric Supply Corporation Ltd, Calcutta
SHRI G. N. THADANI SHRI S. G. GOKHALE (*Alternate*)	Engineers India Ltd, New Delhi
SHRI S. VAIDYANATHAN SHRI R. VARADARAJAN (*Alternate*)	Kerala State Electricity Board, Trivandrum
SHRI S. P. SACHDEV, Director (Elec tech)	Director General, ISI (*Ex-officio Member*)

Secretary

SHRI K. GANESH
Assistant Director (Elec tech), ISI

(*Continued on page* 10)

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

Indian Standard

DANGER NOTICE PLATES

(First Revision)

0. FOREWORD

0.1 This Indian Standard (First Revision) was adopted by the Indian Standards Institution on 7 October 1982, after the draft finalized by the Code of Practice for Power Installation and Maintenance Sectional Committee had been approved by the Electrotechnical Division Council.

0.2 Under Rule No. 35 of the Indian Electricity Rules, 1956, the owner of every medium, high and extra high voltage installation is required to affix permanently in a conspicuous position a danger notice in Hindi or English and the local language of the district, with the sign of skull and bones and of a type approved by the Electrical Inspector. The rule is reproduced in Appendix A.

0.3 It has been however observed that in different places, different sizes and designs of such notice plates have been in use and the need for standardizing the important features of such danger notice plates has been long since felt. This standard was therefore originally prepared in 1963, to cover Hindi version of the notice plates in consonance with the then existing rules.

0.4 This revision is being brought out to cover standardized features of notice plates in line with IE Rule 35 as amended as well as to lay down essential requirements and tests to ensure satisfactory functioning of danger notice plates in use. This revision also includes recommended equivalent to the word 'danger' in some of the regional languages for use in the respective states. Equivalents in other languages are under consideration.

0.5 This standard for the time being includes the requirements of danger notice in the form of plates only. It is, however, recognized that the use of danger notices in the form of stickers are also in vogue in the country in some States. The requirements of such danger notices in a form other than plates are under consideration for standardization.

0.6 In the interest of universal acceptance of the message of caution in the danger notice irrespective of language consideration, it is proposed to

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

evolve, a standard symbol for danger which would, it is hoped in due course replace the present contents of danger notice.

0.7 For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test, shall be rounded off in accordance with IS : 2-1960*. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

1. SCOPE

1.1 This standard covers danger notice plates to be displayed in accordance with Rule No. 35 of the Indian Electricity Rules, 1956.

2. DANGER NOTICE PLATES

2.1 Dimensions

2.1.1 For the purposes of this standard, two sizes of danger notice plates are recommended as below:

a) For display at medium voltage installations	200 × 150 mm (*see* Fig. 1)
b) For high and extra high voltage installations	250 × 200 mm (*see* Fig. 2)

2.1.2 All letterings shall be centrally spaced. The dimensions of the letters, figures and their respective positions shall be as given in Fig. 1 and Fig. 2 for medium voltage and high and extra high voltage installations respectively. The size of each letter in the word in each language, and the spacing between them for the purposes of scribing shall be so chosen that they are uniformly written in the space earmarked for them.

2.1.3 The corners of the plate shall be rounded off.

2.1.4 The location of the fixing holes shall be left to the choice of the user.

3. MATERIAL AND FINISH

3.1 The plate shall be made from mild steel, at least 1·6 mm thick and vitreous enamelled white, with letters, figures and the conventional skull and cross-bones in signal red colour [*see* IS : 5-1978†] on the front side. The rear side of the plate shall also be enamelled.

*Rules for rounding off numerical values (*revised*).

†Colours for ready mixed paints and enamels (*third revision*).

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

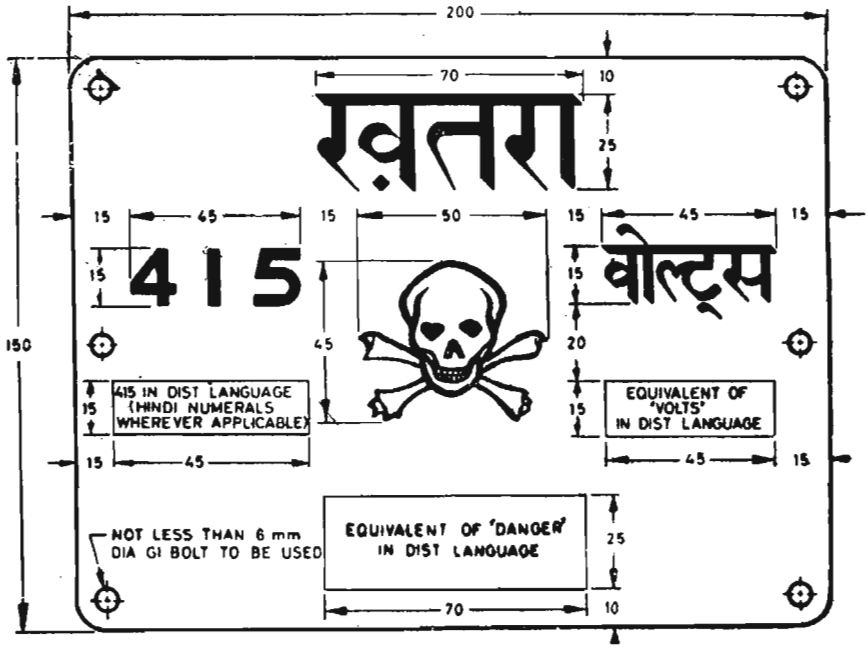

NOTE 1 — All letterings should be centrally spaced.

NOTE 2 — The dimensions for the words in district language are mainly for guidance, however, care should be taken to space them centrally between the edges and the area of the skull and bones.

NOTE 3 — The location of the fixing holes shall be left to the choice of the user.

NOTE 4 — The corners of the plates should be rounded off.

All dimensions in millimetres.

FIG. 1 DANGER NOTICE PLATE FOR MEDIUM VOLTAGE INSTALLATION

4. LANGUAGES

4.1 Hindi — The word recommended to denote danger in *Hindi* and the type of lettering are indicated in the specimen danger notice plates shown in Fig. 1 and 2.

4.2 English — For denoting in English, the type of lettering recommended is shown in Fig. 3.

4.3 Other District Languages — The recommended equivalents to danger in some regional languages are given in Appendix B.

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

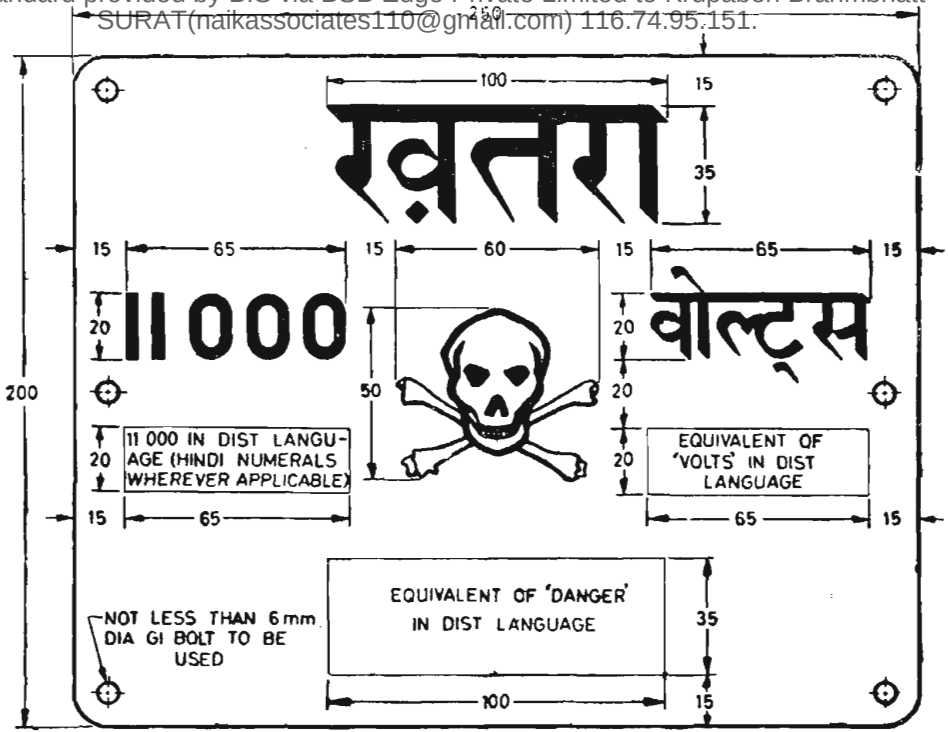

NOTE 1 — All letterings should be centrally spaced.

NOTE 2 — The dimensions for the words in district language are mainly for guidance, however, care should be taken to space them centrally between the edges and the area of the skull and bones.

NOTE 3 — The location of the fixing holes shall be left to the choice of the user.

NOTE 4 — 11 000 volts is just specimen, actual voltage is to be inserted for different system voltages.

NOTE 5 — The corners of the plates should be rounded off.

All dimensions in millimetres.

FIG. 2 DANGER NOTICE PLATE FOR HIGH AND EXTRA-HIGH VOLTAGE INSTALLATION

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

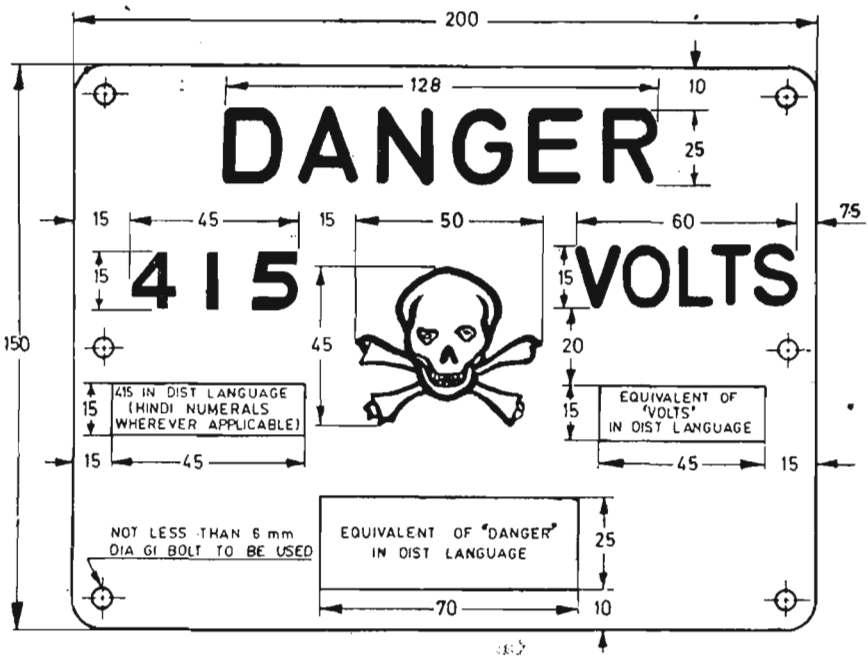

All dimensions in millimetres.

FIG. 3 DANGER NOTICE PLATE FOR MEDIUM VOLTAGE INSTALLATION

5. MARKING

5.1 The essential information that would be necessary to identify the manufacturer of the danger notice plates shall be marked, in such a manner and position on the plates that it does not interfere with the other information.

5.2 The danger notice plates may also be marked with the ISI Certification Mark.

NOTE — The use of the ISI Certification Mark is governed by the provisions of the Indian Standards Institution (Certification Marks) Act and the Rules and Regulations made thereunder. The ISI Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well-defined system of inspection, testing and quality control which is devised and supervised by ISI and operated by the producer. ISI marked products are also continuously checked by ISI for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the ISI Certification Mark may be granted to manufacturers or processors, may be obtained from the Indian Standards Institution.

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

6. TESTS

6.0 General

6.0.1 In order to ensure that the notice plates conform to this specification, the following essential tests are specified. The number of samples to be tested shall be as agreed to between the supplier and the user.

6.0.2 The following shall constitute the tests:

a) Visual examination,

b) Dimensional check, and

c) Test for wheather-proofness.

6.1 Visual Examination — The samples of notice plates shall be examined visually for conformity to the various requirements of this standard in respect of the works and letters used, their relative position and size. The colour of the paint used shall be visually compared with the signal red colour specified in IS : 5-1978*.

6.2 Dimensional Check — The dimensions of the plate, its thickness and the size of lettering, figures, etc, shall be checked for conformity to Fig. 1 or Fig. 2 as applicable. All letterings shall be centrally spaced and shall conform generally to the stipulations in **2.1.2** to **2.1.4**.

6.3 Test for Weather-Proofness — For the purpose of verifying colour retention of the vitreous enamel coatings, the method of test specified in IS : 8709-1977† shall apply.

APPENDIX A

(*Clause* 0.2)

EXTRACT FROM INDIAN ELECTRICITY RULES, 1956

Rules 35 *Danger Notices* — The owner of every medium, high and extra high voltage installation shall affix permanently in a conspicuous position a danger notice in Hindi or English and the local languages of the district, with a sign of skull and bones and of a type approved by the Inspector on:

a) every motor, generator, transformer and other elecrical plant and equipment together with apparatus used for controlling or regulating the same.

*Colours for ready mixed paints and enamels (*third revision*).

†Method of tests for colour retention of vitreous enamel coatings.

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

b) all supports of high and extra high voltage overhead lines which can be easily climbed upon without the aid of ladder or special appliances.

Explanation — rails, tubular poles, wooden supports, reinforced cement concrete poles without steps. I-sections and channels, shall be deemed as supports which cannot be easily climbed upon for the purposes of this clause.

c) Luminous tube sign requiring high voltage supply, X-ray and similar high-frequency installations.

Provided that where it is not possible to affix notices on any generator, motor, transformer or other apparatus, they shall be affixed as near as possible thereto; or the word danger and the voltage of the apparatus concerned shall be permanently painted on it.

Provided further that where the generator, motor, transformer or other apparatus is within an enclosure, one notice affixed to the said enclosure shall be sufficient for the purpose of this rule.

APPENDIX B

(*Clause* 4.3)

RECOMMENDED EQUIVALENTS TO 'DANGER' IN SOME REGIONAL LANGUAGES

Language	*Equivalent to the word ' Danger '*
Punjabi	ਖਤਰਾ
Urdu	خطرہ
Marathi	धोका
Tamil	ஆபத்து
Malayalam	അപായം
Bengali	বিপদ
Oriya	ବିପଦ

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

(*Continued from page* 2)

Panel for Safety Procedures, ETDC 20/P35

Convener	*Representing*
SHRI P. C. MANKODI	Gujarat Electricity Board, Vadodara
Members	
SHRI J. H. PATEL (*Alternate* to Shri P. C. Mankodi)	
CHIEF ENGINEER (ELEC)-I	Central Public Works Department, New Delhi
SHRI B. GUPTA SHARMA (*Alternate*)	
DIRECTOR (COMMERCIAL)	Central Electricity Authority, New Delhi
DEPUTY DIRECTOR (L & L) (*Alternate*)	
SHRI H. N. GUPTA	Directorate General of Factory, Bombay
SHRI G. VAIDYANATHAN (*Alternate*)	
SHRI D. J. HASTAK	Maharashtra State Electricity Board, Bombay
SHRI D. NARAYANA RAO	Karnataka Electricity Board, Bangalore
DR T. C. SIDHAN	Chief Electrical Inspector, Government of Kerala, Trivandrum

Free Standard provided by BIS via BSB Edge Private Limited to Krupaben Brahmbhatt - SURAT(naikassociates110@gmail.com) 116.74.95.151.

BUREAU OF INDIAN STANDARDS

Headquarters :

Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002

Telephones : 331 01 31
331 13 75

Telegrams : Manaksanstha
(Common to all Offices)

Regional Offices :		*Telephone*
Central	: Manak Bhavan, 9, Bahadur Shah Zafar Marg, NEW DELHI 110002	331 01 31 331 13 75
* Eastern	: 1/14 C.I.T. Scheme VII M, V.I.P. Road, Maniktola, CALCUTTA 700054	37 86 62
Northern	: SCO 445-446, Sector 35-C, CHANDIGARH 160036	2 18 43
Southern	: C.I.T. Campus, IV Cross Road, MADRAS 600113	41 29 16
† Western	: Manakalaya, E9 MIDC, Marol, Andheri (East), BOMBAY 400093	6 32 92 95

Branch Offices :	
'Pushpak', Nurmohamed Shaikh Marg, Khanpur, AHMADABAD 380001	2 63 48
‡ Peenya Industrial Area, 1st Stage, Bangalore-Tumkur Road, BANGALORE 560058	39 49 55
Gangotri Complex, 5th Floor, Bhadbhada Road, T.T. Nagar, BHOPAL 462003	55 40 21
Plot No. 82/83, Lewis Road, BHUBANESHWAR 751002	5 36 27
Kalai Kathir Building, 6/48-A Avanasi Road, COIMBATORE 641037	2 67 05
Quality Marking Centre, N.H. IV, N.I.T., FARIDABAD 121001	—
Savitri Complex, 116 G. T. Road, GHAZIABAD 201001	8-71 19 96
53/5 Ward No. 29, R.G. Barua Road, 5th By-lane, GUWAHATI 781003	3 31 77
5-8-56C L. N. Gupta Marg, (Nampally Station Road) HYDERABAD 500001	23 10 83
R14 Yudhister Marg, C Scheme, JAIPUR 302005	6 34 71
117/418 B Sarvodaya Nagar, KANPUR 208005	21 68 76
Plot No. A-9, House No. 561/63, Sindhu Nagar, Kanpur Road, LUCKNOW 226005	5 55 07
Patliputra Industria Estate, PATNA 800013	6 23 05
District Industries Centre Complex, Bagh-e-Ali Maidan, SRINAGAR 190011	—
T. C. No. 14/1421, University P. O., Palayam, THIRUVANANTHAPURAM 695034	6 21 04

Inspection Offices (With Sale Point) :	
Pushpanjali, First Floor, 205-A West High Court Road, Shankar Nagar Square, NAGPUR 440010	52 51 71
Institution of Engineers (India) Building, 1332 Shivaji Nagar, PUNE 411005	5 24 35

*Sales Office Calcutta is at 5 Chowringhee Approach, P. O. Princep Street, CALCUTTA	27 68 00
† Sales Office is at Novelty Chambers, Grant Road, BOMBAY	89 65 28
‡ Sales Office is at Unity Building, Narasimharaja Square, BANGALORE	22 39 71

Printed at Dee Kay Printers, New Delhi, India