


Compact exterior arrangement

Single rear cover. Screen-only front. Left USB / right power button. Upper-left inlet and upper-right exhaust; left and right are viewed from the screen.

ENGINEERING CONCEPT REVIEW


NOT TO SCALE / PRINT RELEASE PENDING

01 / FRONT

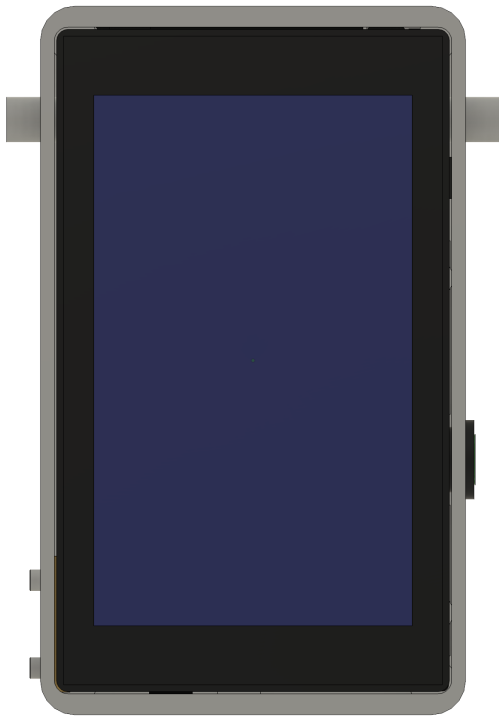


4.3-inch portrait screen in the measured factory housing.

02 / REAR

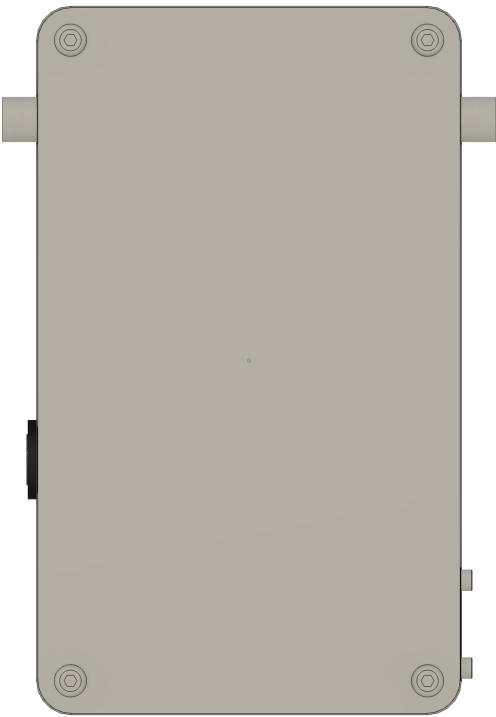


One removable cover. Separate occurrences for individual screws.

03 / LEFT SIDE

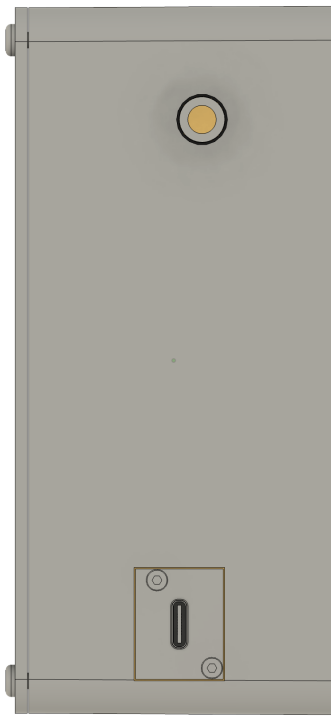

USB-C and upper gas inlet. No external O2 coax socket.

04 / RIGHT SIDE

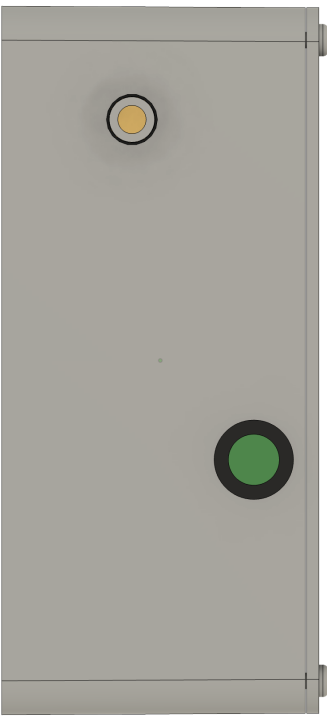

Power button and upper gas exhaust.

DIMENSION REFERENCES / MILLIMETRES

REFERENCE	ENVELOPE / SIZE	BASIS AND LIMIT
Model body	125 H x 75 W x 56 D	Actual assembly: 125 H x 87 W x 57.65 D mm, including projections.
Factory-cased display	116.8 H x 69.3 W x 13.7 D	Owner-measured; factory back removed. Mounting details remain provisional.
Occupied FMA holder	80.4 H x 42 W x 20.35 D	Owner-measured with cells. Include retained plug and disconnection clearance.
Active display	56.16 W x 93.60 H; 4.3-inch	Manufacturer drawing; 480 x 800 portrait. Verify offset in actual housing.

Model status: 80 occurrences and 118 solid body instances. Editable concept; physical fit and release checks remain open.

Sources: owner measurements; [Guition specification](#); [GCT USB4720 Revision B drawing](#). See MEASUREMENTS.md for part identities and remaining measurements. Views are resized independently; do not measure these sheets.


Internal packaging and service access

L-shaped chamber across the upper region and down the viewer's left side. Measured pack sits low behind the display; future PCB geometry remains a mechanical target.

ENGINEERING CONCEPT REVIEW


NOT TO SCALE / PRINT RELEASE PENDING

05 / REAR OPEN

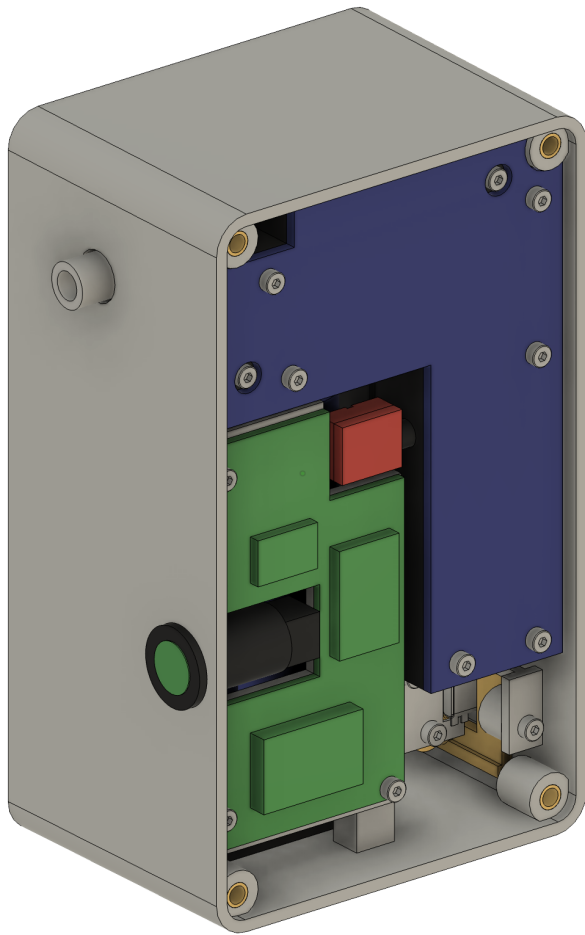

Rear cover hidden. Inspect the actual internal arrangement and rear-accessible retainers.

06 / SECTION

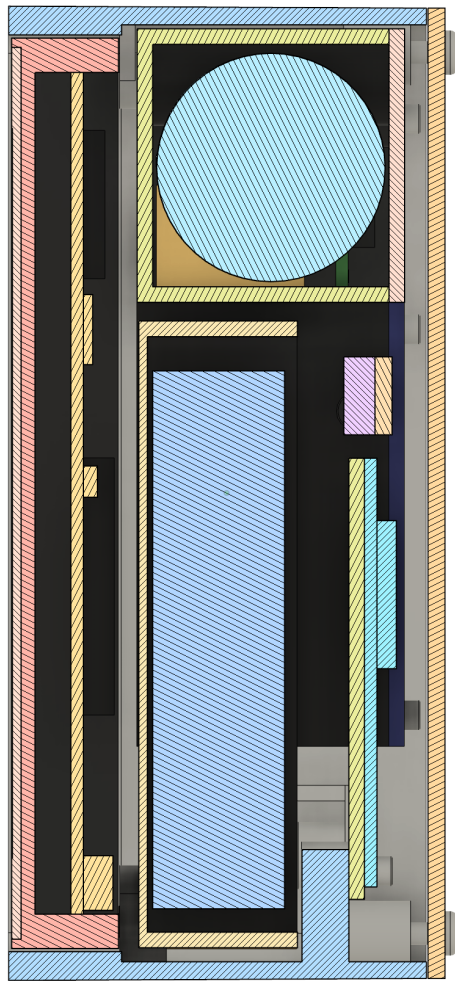

Screen left; rear cover right. Hatched cut shows display, pack and PCB depth clearances.

PACKAGING INTENT

Display removal is forward

Remove the single rear cover, disconnect the module and release rear retainers. Then lift the complete factory-cased display through the front. Actual frame capture and retention are unvalidated.

L-shaped sampling chamber

AO2 axis along X; CO and MD62 in the viewer's-left column. Keep the gas path enclosed when the outer cover is removed.

Battery and future PCB

Keep the protected holder low behind the display. Reserve plug access first. The reshaped PCB clearance is not a completed KiCad layout.

Side interfaces

Support the GCT connector's separate 0.60 mm board. Include button nut, terminals, real plug overmould and wiring clearance.

Gas and temperature

Leave an open route from inlet to exhaust around the installed sensors. The lower He/CO column can be bypassed; sample renewal is unvalidated. Avoid a direct inlet jet at CO and local heating of humidity sensing.

READING THE MODEL

+X = viewer's left; +Y = up; +Z = rearward. Rear views reverse visual left/right. Owner measurements establish display and pack envelopes; manufacturer-derived details and provisional clearances must retain their source labels.

Gas seals, fastener fit, purchased-part tolerances and flexible harness behaviour require physical checks. Visual separation in a view is not an interference or flow test.


Exploded assembly and evidence

One rear cover exposes the service fasteners. Individual screws remain separate assembly occurrences. The exploded arrangement illustrates relationships; it does not prove an extraction path.

ENGINEERING CONCEPT REVIEW

NOT TO SCALE / PRINT RELEASE PENDING

07 / EXPLODED ASSEMBLY

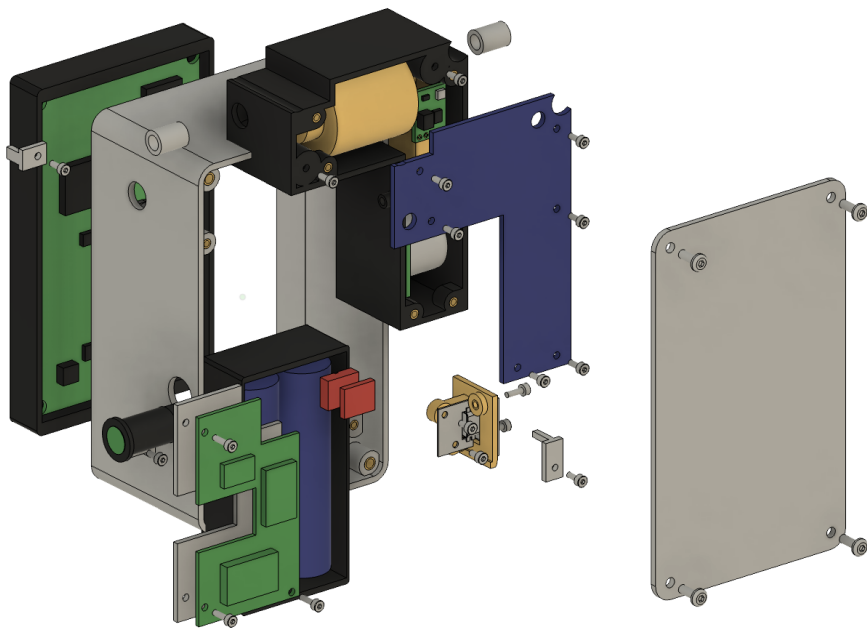

Actual Fusion assembly view. Display leaves forward after rear retainer release; pack, carrier and chamber service through the rear subject to verified prerequisites.

SERVICE ORDER TO VERIFY

- 1 / Isolate and open**
Unplug USB, remove the cover and disconnect the reachable battery plug first.
- 2 / Remove carrier, then chamber**
Remove shared carrier/PCB screws. Detach gas fittings and chamber attachments; withdraw the closed cartridge.
- 3 / Shift the protected pack**
Use the recorded 9-degree in-plane turn, upward/sideways shifts, then rear withdrawal. See README for the exact order; direct rear extraction is not the checked path.
- 4 / Release display from the rear**
Remove its retainers and wiring, then lift the complete module forward. Frame retention is not yet validated.

RECORDED CAD CHECKS

- CAD and regeneration / PASS**
Healthy features/sketches, zero overlaps; three independent +2 mm trials passed.
Evidence: model-audit.json; parameter-regeneration.json
- Service paths / PASS**
Eight paths clear at sampled poses. The pack uses the recorded 9-degree turn.
Evidence: Final combined service-paths report; see README
- Driver access / PASS**
22 nominal shafts clear. Actual hand/handle access and retention remain unverified.
Evidence: service-drivers.json
- Gas-path qualification / PARTIAL**
Two continuous 5 mm probe routes clear; bypass, sealing and thermal response are open.
Evidence: gas-clearance-paths.json
- Minimum printed wall / PARTIAL**
Selected sections meet 2 mm nominal. A global minimum-wall check is not complete.
Evidence: Housing/USB source checks; see README
- Release artifacts / PASS**
Native/STEP saved; seven CAD views and three review sheets inspected. Concept release only.
Evidence: final-delivery-export.json; pdf-review.json

Prototype boundary: editable Fusion + STEP + review sheets. PLA fit testing on the Bambu H2D follows hardware measurements and clearance review. Print-ready release, final material, sealing and gas-response validation remain pending.