

27 MHz AM WALKIE–TALKIE – ONE UNIT (BUILD TWO IDENTICAL)


[A] TX – 27 MHz CRYSTAL OSCILLATOR

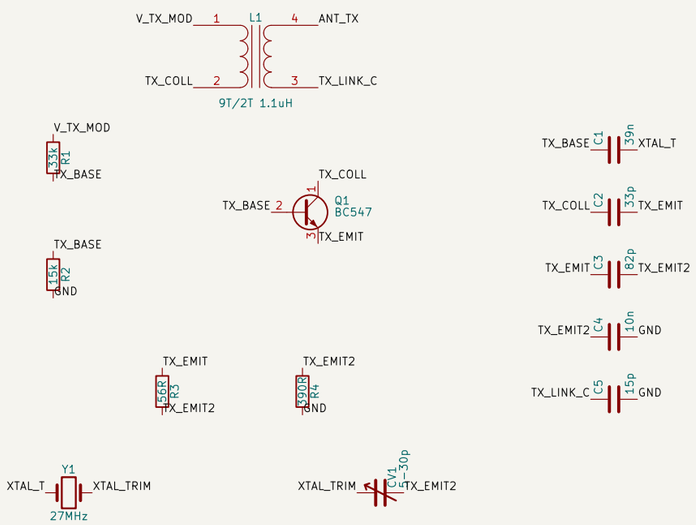


[B] RX – SUPER–REGENERATIVE DETECTOR (identical stage, NO crystal)

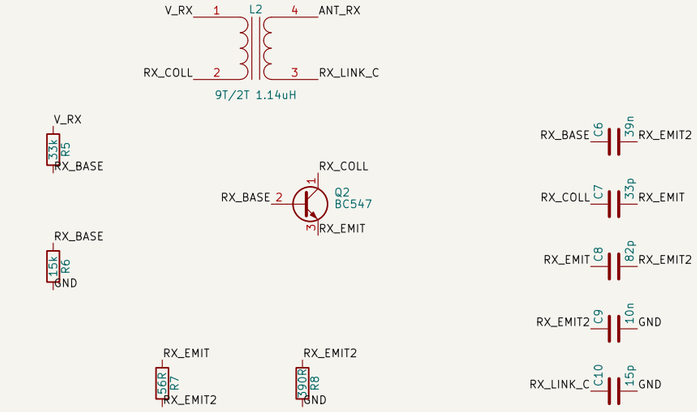


[C] ANTENNA + PTT

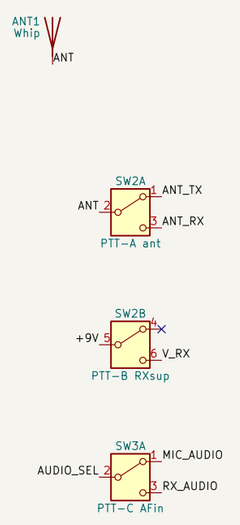


[D] DETECTOR AF TAKE–OFF

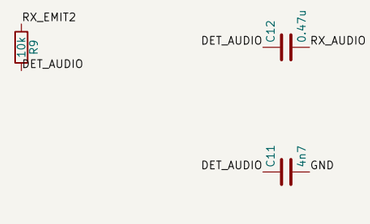


[E] MICROPHONE

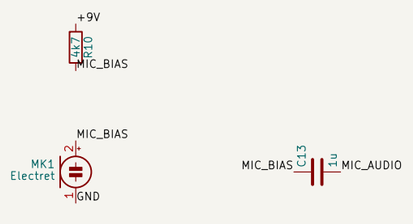

[F] AUDIO AMPLIFIER (doubles as the TX modulator)

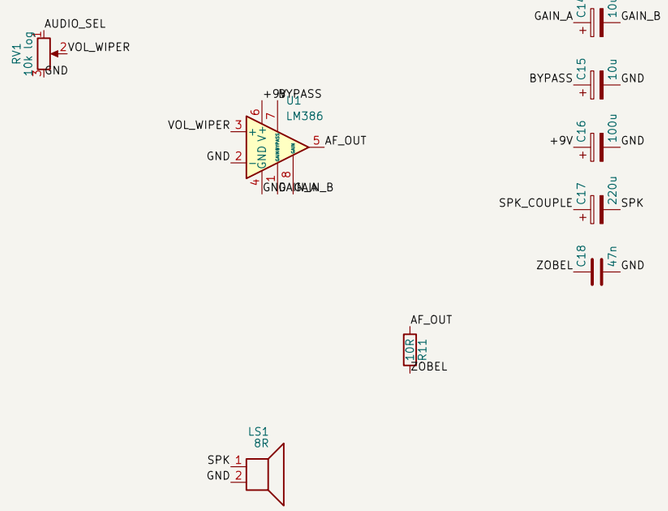

[G] POWER

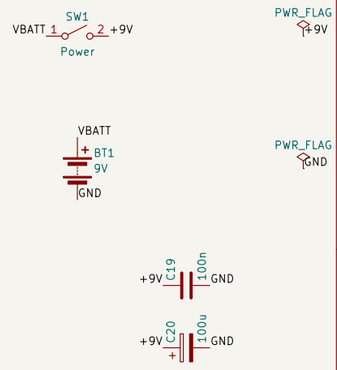

Labels with the same name are connected. SW2 + SW3 = ONE 4PDT PTT switch: pins 1/4 = TX (pressed), pins 3/6 = RX (released).

On TX the LM386 output (AF_OUT) feeds V_TX_MOD – that is the supply modulation. L1, L2 = 9 turns 0.5mm on 6mm former, 2–turn link over the cold end.

R9/C11 = quench low–pass (~3.4 kHz). R11/C18 Zobel on U1 pin 5 is NOT optional. C14 sets gain = 200. R3/R7 select–on–test if slow to start.

Sheet: /		
File: wt27_v4.kicad_sch		
Title:		
Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1