


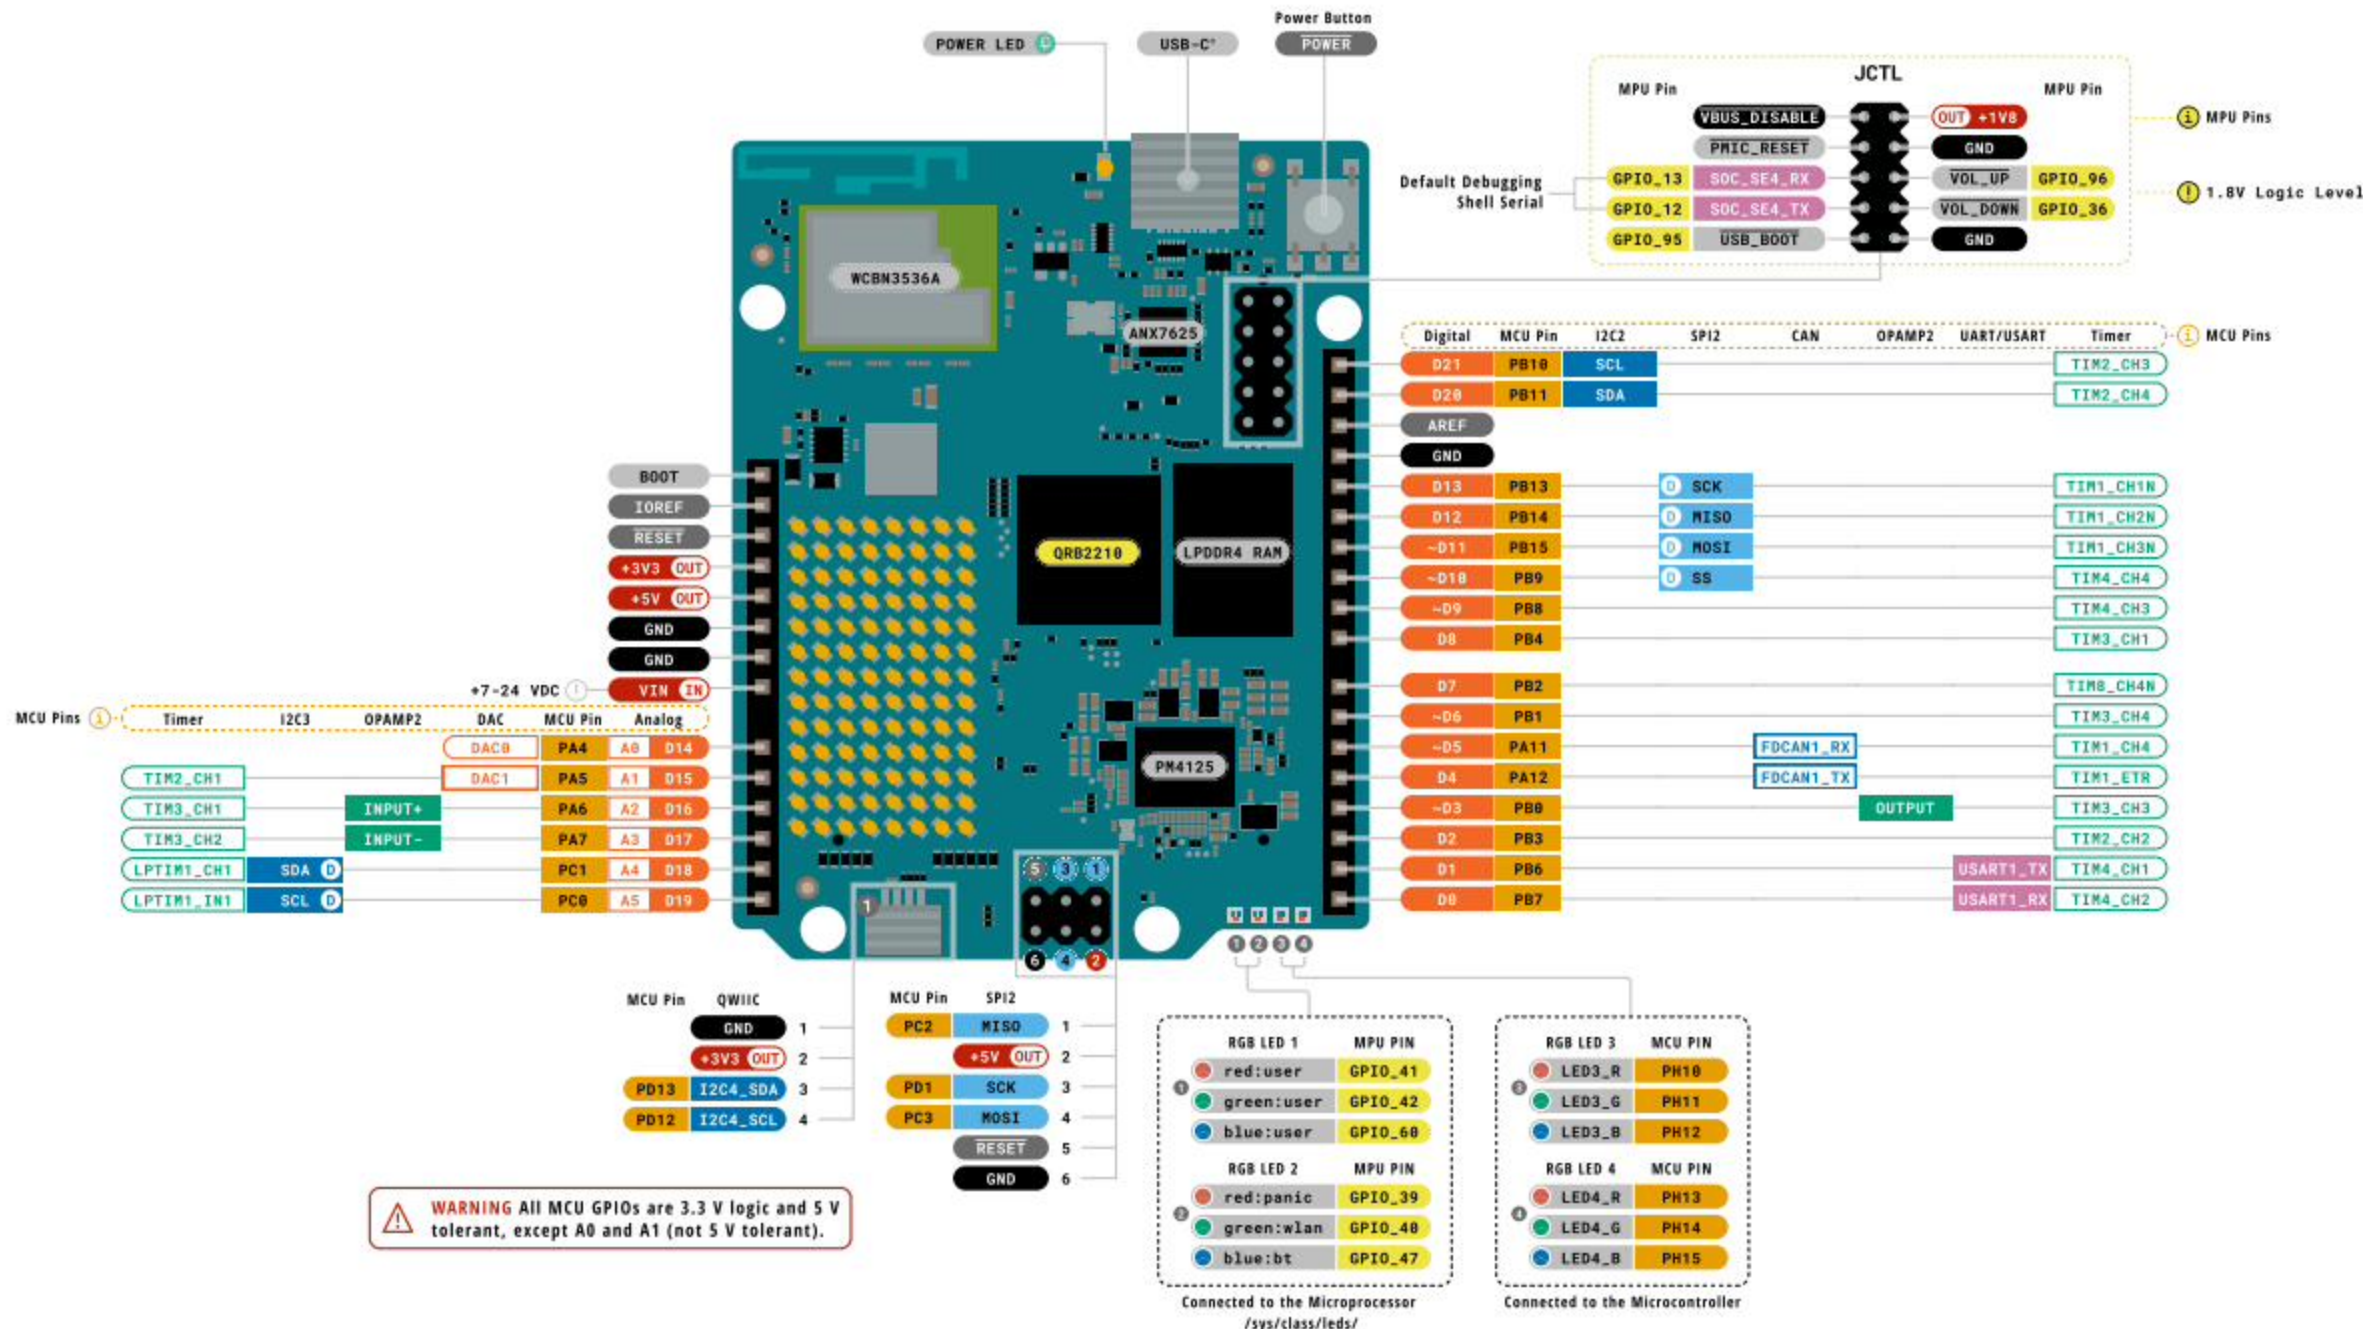

Legend:

Power **IN** Power Input
Ground **OUT** Power Output

GPIO Digital External

Analog External

Main Part

Secondary Part

Internal Component

Other Pins (Reset, System Control, Debugging)

I2C

SPI

UART/USART

Other SERIAL

Analog

PWM/Timer

D Default

D Default

D Default

D Default

D Default

D Default

LED

RGB LED

i CPIO/COPI have previously been referred to as MISO/MOSI

i JSPI and JDIGITAL SPI share the SPI2 MCU peripheral (Can not be used simultaneously as SPI)

WARNING A0 and A1 are not 5V tolerant

WARNING JCTL pins are 1.8V logic only



SKU code: ABX00162-ABX00173
Full Pinout - Page 1 of 4
Last update: 17 Feb, 2026

DOCS.ARDUINO.CC



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1868, Mountain View, CA 94042, USA.


WARNING!

Advanced Section

The following information is for advanced use only and
may not be officially supported by Arduino software



LED Matrix 8x13

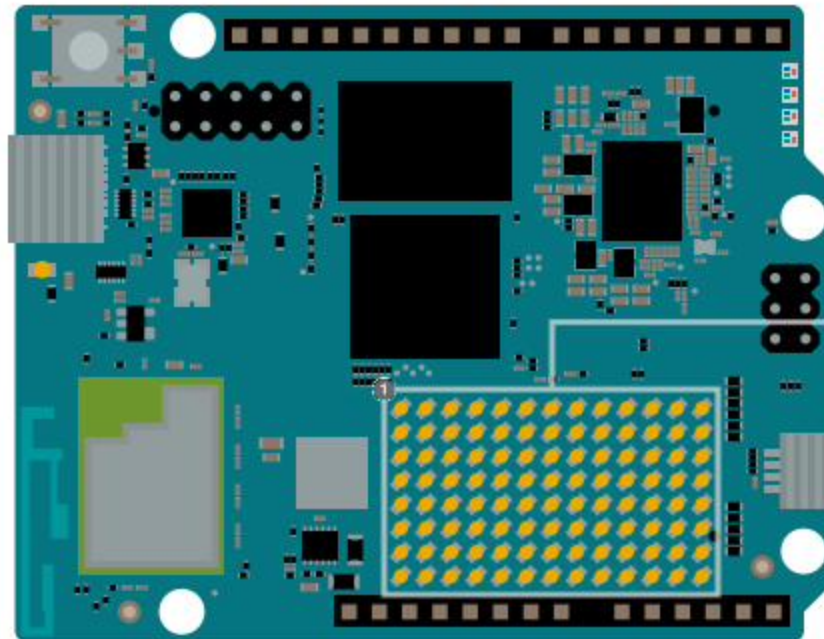

1	2	3	4	5	6	7	8	9	10	11	12	13
14	15	16	17	18	19	20	21	22	23	24	25	26
27	28	29	30	31	32	33	34	35	36	37	38	39
40	41	42	43	44	45	46	47	48	49	50	51	52
53	54	55	56	57	58	59	60	61	62	63	64	65
66	67	68	69	70	71	72	73	74	75	76	77	78
79	80	81	82	83	84	85	86	87	88	89	90	91
92	93	94	95	96	97	98	99	100	101	102	103	104

Legend:

Power
Ground

IN Power Input
OUT Power Output

GPIO Digital External
Analog External
Main Part
Secondary Part
Internal Component
Other Pins (Reset, System Control, Debugging)

I2C
SPI
UART/USART
Other SERIAL
Analog
PWM/Timer
Default
Default
Default
Default

LED
RGB LED



SKU code: ABX00162-ABX00173
Full Pinout - Page 3 of 4
Last update: 17 Feb, 2026

DOCS.ARDUIINO.CC




This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1868, Mountain View, CA 94042, USA.

JMISC

PC6	MCU_PSSI_D8	1	2	MCU_SDMMC1_CMD	PD2
PC7	MCU_PSSI_D1	3	4	MCU_TRACE_CLK	PE2
PC8	MCU_PSSI_D2	5	6	MCU_TRACE_D0	PE3
PC9	MCU_PSSI_D3	7	8	MCU_TRACE_D2	PE5
PE4	MCU_PSSI_D4	9	10	MCU_TRACE_D3	PE6
PI4	MCU_PSSI_D5	11	12	MCU_PE7	PE7
PI6	MCU_PSSI_D6	13	14	MCU_PE8	PE8
PI7	MCU_PSSI_D7	15	16	MCU_I2C4_SCL	PF14
PD9	MCU_PSSI_P0CK	17	18	MCU_I2C4_SDA	PF15
PI5	MCU_PSSI_RDY	19	20	MCU_OPAMP1_VOUT	PA3
PD8	MCU_PSSI_DE	21	22	MCU_OPAMP1_VINP	PA8
PA8	MCU_MCO	23	24	MCU_OPAMP1_VINM	PA1
PA10	MCU_CRS_SYNC	25	26	GND	
GND		27	28	EAR_P_R	
MIC2_INP		29	30	EAR_M_R	
MIC2_INM		31	32	LINEOUT_P	
MIC2_BIAS		33	34	LINEOUT_M	
GND		35	36	HPH_L	
SOC_GPIO_0_SE0		37	38	HPH_R	
SOC_GPIO_1_SE0		39	40	HPH_REF	
SOC_GPIO_2_SE0		41	42	HS_DET	
SOC_GPIO_3_SE0		43	44	GND	
SOC_GPIO_B6_SE0		45	46	SOC_GPIO_98	
SOC_GPIO_B2_SE0		47	48	SOC_GPIO_99	
SOC_GPIO_18		49	50	SOC_GPIO_100	
SOC_GPIO_28		51	52	SOC_GPIO_101	
+3V3	OUT	53	54	OUT +5V USB	
+3V3	OUT	55	56	OUT +5V USB	
+1V8	OUT	57	58	GND	
VCOIN	IN	59	60	OUT VBAT	

MCU Pins
3.3V Logic

MPU Pins
1.8V Logic

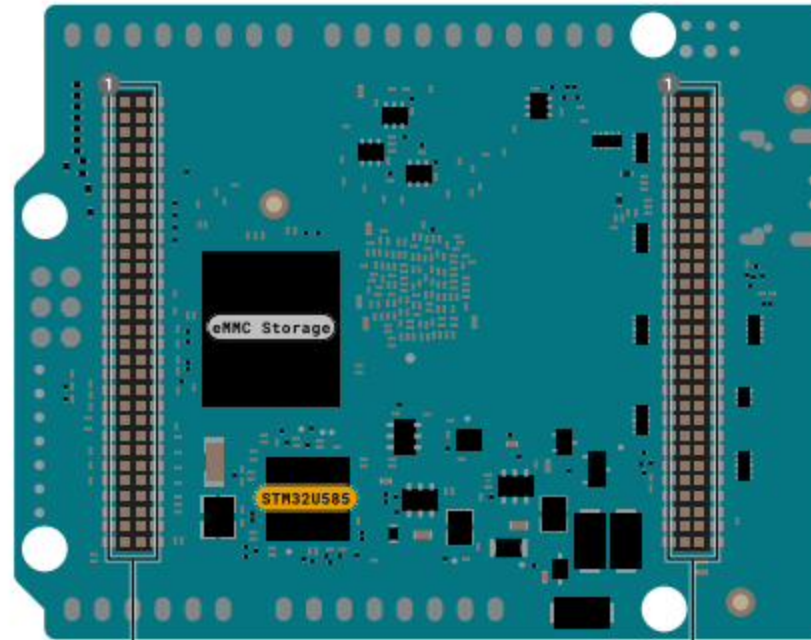

JMEDIA

GND	1	2	GND
MIPI_DSI0_CLK_M	3	4	MIPI_DSI0_L1_P
MIPI_DSI0_CLK_P	5	6	MIPI_DSI0_L1_M
GND	7	8	GND
MIPI_DSI0_L2_M	9	10	MIPI_DSI0_L0_P
MIPI_DSI0_L2_P	11	12	MIPI_DSI0_L0_M
GND	13	14	GND
MIPI_DSI0_L3_M	15	16	SOC_CAM_MCLK0 GPIO_20
MIPI_DSI0_L3_P	17	18	SOC_CAM_MCLK1 GPIO_21
GND	19	20	GND
CSI0_C0_LN0_M	21	22	CCI_I2C_SDA1 GPIO_29
CSI0_B0_LN0_P	23	24	CCI_I2C_SCL1 GPIO_30
GND	25	26	GND
CSI0_B1_LN1_M	27	28	CSI1_B2_LN3_P
CSI0_A1_LN1_P	29	30	CSI1_C2_LN3_M
GND	31	32	GND
CSI0_A0_CLK_M	33	34	CSI1_C1_LN2_P
CSI0_NC_CLK_P	35	36	CSI1_A2_LN2_M
GND	37	38	GND
CSI0_A2_LN2_M	39	40	CSI1_NC_CLK_P
CSI0_C1_LN2_P	41	42	CSI1_A0_CLK_M
GND	43	44	GND
CSI0_C2_LN3_M	45	46	CSI1_A1_LN1_P
CSI0_B2_LN3_P	47	48	CSI1_B1_LN1_M
GND	49	50	GND
GPIO_23	CCI_I2C_SCL0	51	CSI1_B0_LN0_P
GPIO_22	CCI_I2C_SDA0	53	CSI1_C0_LN0_M
GND		55	GND
VIN	IN	57	OUT +3V3
VIN	IN	59	OUT +3V3

! These pins can not be used as regular GPIOs.

! These pins can not be used as regular GPIOs.

Legend:

Power
Ground

IN Power Input
OUT Power Output

GPIO Digital External
Analog External

Main Part

Secondary Part

Internal Component

Other Pins (Reset, System Control, Debugging)

I2C

SPI

UART/USART

Other SERIAL

Analog Audio

PWM/Timer

Default

Default

Default

Default

Default

Default

LED

RGB LED

- WARNING** Be aware of the pins logic level.
- Analog Audio functionality is provided by the PMIC.
- CIP0/COPI have previously been referred to as MISO/MOSI



SKU code: ABX00162-ABX00173
Full Pinout - Page 4 of 4
Last update: 17 Feb, 2026

DOCS.ARDUNO.CC
This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1868, Mountain View, CA 94042, USA.