

# **AE7926C Datasheet**

**Zhuhai Jieli Technology Co.,LTD**

**Version V1.1**

**Date 2025.10.09**

**Copyright © Zhuhai Jieli Technology Co.,LTD. All rights reserved.**

Revision History

| Date       | Revision | Author   | Description     |
|------------|----------|----------|-----------------|
| 2025.09.17 | V1.0     | zh-jieli | Initial Release |
| 2025.10.09 | V1.1     | zh-jieli | Update Features |
|            |          |          |                 |

# Table of Contents

|                                           |           |
|-------------------------------------------|-----------|
| <b>Revision History .....</b>             | <b>1</b>  |
| <b>Table of Contents .....</b>            | <b>2</b>  |
| <b>AE7926C Features .....</b>             | <b>3</b>  |
| <b>1 Block Diagram .....</b>              | <b>5</b>  |
| <b>2 Pin Definition .....</b>             | <b>6</b>  |
| 2.1 Pin Assignment .....                  | 6         |
| 2.2 Pin Description .....                 | 7         |
| <b>3 Electrical Characteristics .....</b> | <b>16</b> |
| 3.1 Absolute Maximum Ratings .....        | 16        |
| 3.2 ESD Ratings .....                     | 16        |
| 3.3 PMU Characteristics .....             | 16        |
| 3.4 IO Characteristics .....              | 17        |
| 3.5 Audio DAC Characteristics .....       | 20        |
| 3.6 Audio ADC Characteristics .....       | 21        |
| 3.7 BT Characteristics .....              | 22        |
| 3.8 WiFi Characteristics .....            | 22        |
| <b>4 Package Information .....</b>        | <b>24</b> |
| 4.1 QFN132_10*10mm .....                  | 24        |
| <b>5 IC Marking Information .....</b>     | <b>25</b> |
| <b>6 Solder-Reflow Condition .....</b>    | <b>26</b> |

# AE7926C Features

## SYSTEM

- Dual Core 32bit DSP 320MHz
- With IEEE754 Single precision FPU
- Support jieli TEE
- Support FFT / MATRIX / MATH
- 2 x I-cache and D-cache
- On-chip SRAM 352kbyte
- Support SDTAP / EMU / ETM
- Support MMU
- Support MPU
- Built-in SDRAM/DDR (Maximum 64Mbyte)
- SPI FLASH Controller (Maximum 64Mbyte)
- 24MHz crystal oscillator
- 32KHz RTC crystal oscillator
- Internal RC oscillator, PLL

## Video Input

- Internal Image Signal Processor
- Support DVP, BT656, SPI interface
- Support 1 lane MIPI-CSI interface
- Support RAW, YUV422 formats
- Support video resize an time mark
- 2 x JPEG codec

## Video output

- Support display color enhancement
- Support DPI, DBI, BT656 interface
- Support 4 lane MIPI-DSI interface
- Support RGB, YUV formats

## Graphics

- Internal 2D DMA
- Internal 2.5D GPU
- Support vector graphics rendering
- Support image resize, rotation, projection
- Support multiple blending mode
- Support ARGB, RGB, YUV, Lx, Ax formats

## DSP Audio Processing

- SBC/AAC/LDAC/LHDC/LC3/CVSD/mSBC codec
- mSBC voice codec supported for BT phone
- PLC for voice processing
- Single/Multi MIC ENC
- Multi-band DRC
- Multi-band EQ
- Support spatial sound

## Audio

- 2 x 16bit DAC
  - ❖ SNR 103dB
  - ❖ Noise 6.4uVrms
  - ❖ Supports differential mode
  - ❖ Sampling rate 8~96kHz
- 2 x 16bit ADC
  - ❖ SNR 95dB
  - ❖ Sampling rate 8~48kHz
- I2S/PDM AUDIO Master/Slave interface

## Bluetooth

- Dual-mode BT6.0 with LE Audio (DN Q332415)
- Support AoA/AoD
- Support LE audio BIS/CIS
- Support long range BLE
- Maximum transmitting power 19 dBm
- Receiver sensitivity
  - ❖ -95.5 dBm @BR
  - ❖ -96 dBm @EDR  $\pi/4$  DQPSK
  - ❖ -88 dBm @EDR 8DPSK

## IEEE 802.11b/g/n

- 1T1R in 2.4 GHz band
- 20 MHz and 40 MHz bandwidth
- Data rate up to 150 Mbps
- Security: WPA/WPA3 personal, WPS2.0, WAPI
- QoS: WFA WMM, WMM PS
- Support STBC, A-MPDU, A-MSDU, BLK-ACK
- Support Station, SoftAP, Station+SoftAP, Promiscuous mode
- Maximum transmitting power
  - ❖ 19 dBm @1Mbps, DSSS
  - ❖ 17 dBm @HT20, MCS0
  - ❖ 13 dBm @HT20, MCS7
- Receiver sensitivity
  - ❖ -97 dBm @1Mbps, DSSS
  - ❖ -93 dBm @HT20, MCS0
  - ❖ -74 dBm @HT20, MCS7

## Peripherals

- 1 x High speed USB
- 1 x Full speed USB
- 2 x SD host controller
- 6 x Multi-function 32bit timer
- 5 x UART interface
- 3 x I<sup>2</sup>C Master/Slave interface
- 3 x SPI Master/Slave interface
- 1 x QDEC
- 1 x CAN Controller
- 1 x Ethernet Mac
- 8 x MCPWM
- 1 x PAP Interface
- 3 x Light strip Controller
- 1 x 10bit ADC(16 Channel)
- 77 x GPIO Support function remapping
- Built-in RTC with alarm, wakeup

## PMU

- 1 x Buck DC-DC converter
- 3 x IO power domain
- WIFI PA support external power supply
- RTCVDD33 support external power supply
- Support temperature sensor
- VBAT range 2.7V to 5.5V
- IOVDD range 2.7V to 3.6V

## Packages

- QFN132(10mm\*10mm)

## Temperature

- Operating temperature  
TC = -30℃ to +85℃
- Storage temperature -65℃ to +150℃

## Applications

- IPC
- Driving recorder
- WIFI Appliances
- Electric bicycle display panel

## 1 Block Diagram

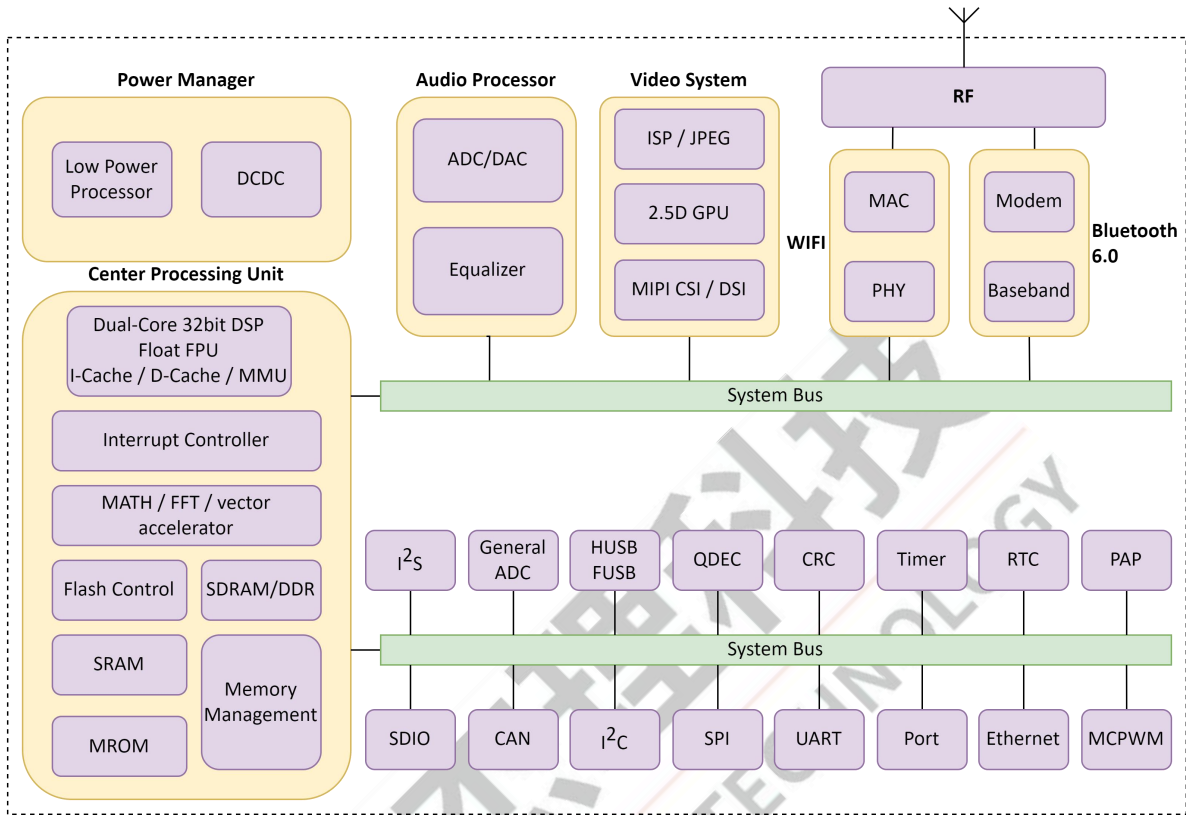


Figure 1-1 AE7926C Block Diagram

## 2 Pin Definition

### 2.1 Pin Assignment

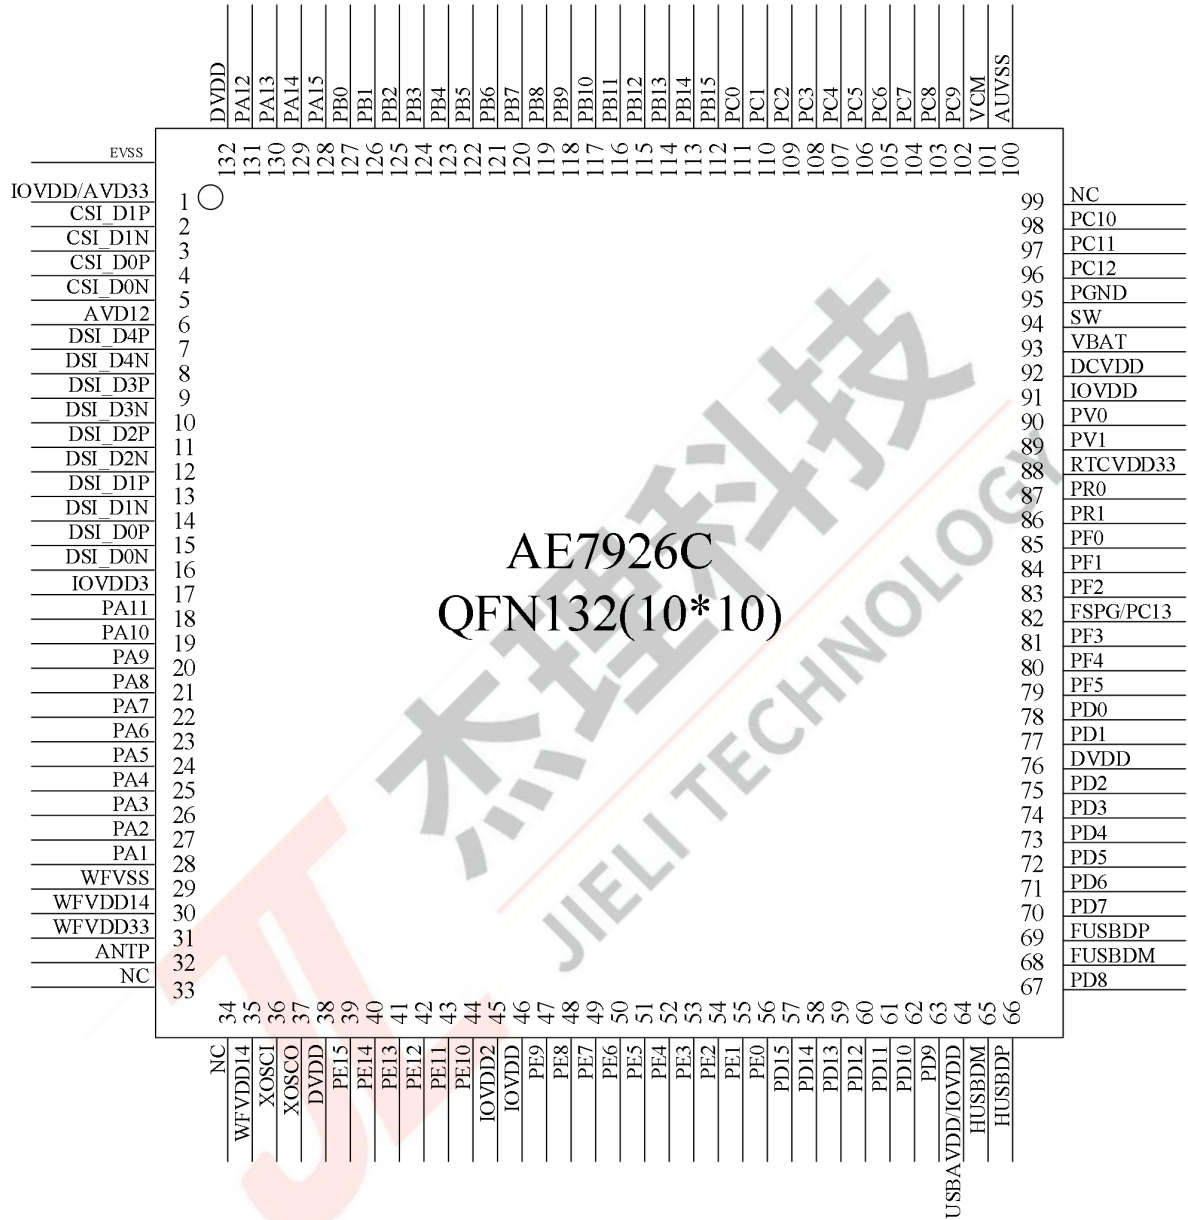


Figure 2-1 AE7926C Pin Assignment

## 2.2 Pin Description

Table 2-2-1 AE7926C Pin Description

| Pin No. | Name    | Type | IO Initial State | Description                                                                         |
|---------|---------|------|------------------|-------------------------------------------------------------------------------------|
| 1       | IOVDD   | P    | --               | IO Power                                                                            |
|         | AVD33   | P    | --               | Analog 3.3V Power                                                                   |
| 2       | CSI_D1P | I    | --               | MIPI CSI D1P                                                                        |
| 3       | CSI_D1N | I    | --               | MIPI CSI D1N                                                                        |
| 4       | CSI_D0P | I    | --               | MIPI CSI D0P                                                                        |
| 5       | CSI_D0N | I    | --               | MIPI CSI D0N                                                                        |
| 6       | AVD12   | P    | --               | Analog 1.2V Power                                                                   |
| 7       | DSI_D4P | I/O  | --               | MIPI DSI D4P                                                                        |
| 8       | DSI_D4N | I/O  | --               | MIPI DSI D4N                                                                        |
| 9       | DSI_D3P | I/O  | --               | MIPI DSI D3P                                                                        |
| 10      | DSI_D3N | I/O  | --               | MIPI DSI D3N                                                                        |
| 11      | DSI_D2P | I/O  | --               | MIPI DSI D2P                                                                        |
| 12      | DSI_D2N | I/O  | --               | MIPI DSI D2N                                                                        |
| 13      | DSI_D1P | I/O  | --               | MIPI DSI D1P                                                                        |
| 14      | DSI_D1N | I/O  | --               | MIPI DSI D1N                                                                        |
| 15      | DSI_D0P | I/O  | --               | MIPI DSI D0P                                                                        |
| 16      | DSI_D0N | I/O  | --               | MIPI DSI D0N                                                                        |
| 17      | IOVDD3  | P    | --               | IO Power for PA1~PA11                                                               |
| 18      | PA11    | I/O  | Z                | LCD_DATA7(A)<br>Sensor0_D9(B)<br>PAP_D7(A)<br>TS0_DATA5                             |
| 19      | PA10    | I/O  | Z                | SFC1_DO<br>LCD_DATA6(A)<br>Sensor0_D8(B)<br>PAP_D6(A)<br>TS0_DATA4<br>SD0_DATA3(B)  |
| 20      | PA9     | I/O  | Z                | SFC1_CLK<br>LCD_DATA5(A)<br>Sensor0_D7(B)<br>PAP_D5(A)<br>TS0_DATA3<br>SD0_DATA2(B) |

| Pin No. | Name   | Type | IO Initial State | Description                                                                           |
|---------|--------|------|------------------|---------------------------------------------------------------------------------------|
| 21      | PA8    | I/O  | Z                | SFC1_DATA3<br>LCD_DATA4(A)<br>Sensor0_D6(B)<br>PAP_D4(A)<br>TS0_DATA2<br>SD0_DATA1(B) |
| 22      | PA7    | I/O  | Z                | LCD_DATA3(A)<br>Sensor0_D5(B)<br>PAP_D3(A)<br>TS0_DATA1<br>SD0_CLK(B)                 |
| 23      | PA6    | I/O  | Z                | SFC1_DATA2<br>LCD_DATA2(A)<br>Sensor0_D4(B)<br>PAP_D2(A)<br>TS0_DATA0<br>SD0_CMD(B)   |
| 24      | PA5    | I/O  | Z                | SFC1_DI<br>LCD_DATA1(A)<br>Sensor0_D3(B)<br>PAP_D1(A)<br>TS0_CLK<br>SD0_DATA0(B)      |
| 25      | PA4    | I/O  | Z                | SFC1_CS<br>LCD_DATA0(A)<br>Sensor0_D2(B)<br>PAP_D0(A)<br>TS0_SYNC                     |
| 26      | PA3    | I/O  | Z                | Sensor0_CLK(B)<br>TS0_VALID                                                           |
| 27      | PA2    | I/O  | Z                | Sensor0_SYNC1(B)<br>TS0_ERROR                                                         |
| 28      | PA1    | I/O  | Z                | Sensor0_SYNC0(B)                                                                      |
| 29      | WVSS   | G    | --               | Ground of Wireless                                                                    |
| 30      | WVDD14 | P    | --               | Wireless 1.4V Power                                                                   |
| 31      | WVDD33 | P    | --               | Wireless 3.3V Power                                                                   |
| 32      | ANTP   | RF   | --               | Antenna Positive Port                                                                 |
| 33      | NC     | --   | --               | --                                                                                    |
| 34      | NC     | --   | --               | --                                                                                    |
| 35      | WVDD14 | P    | --               | Wireless 1.4V Power                                                                   |
| 36      | XOSCI  | I    | --               | Crystal Oscillator Input                                                              |

| Pin No. | Name   | Type | IO Initial State | Description                                                                                            |
|---------|--------|------|------------------|--------------------------------------------------------------------------------------------------------|
| 37      | XOSCO  | O    | --               | Crystal Oscillator Output                                                                              |
| 38      | DVDD   | P    | --               | Digital Logic Power                                                                                    |
| 39      | PE15   | I/O  | Z                | --                                                                                                     |
| 40      | PE14   | I/O  | Z                | --                                                                                                     |
| 41      | PE13   | I/O  | Z                | --                                                                                                     |
| 42      | PE12   | I/O  | Z                | --                                                                                                     |
| 43      | PE11   | I/O  | Z                | --                                                                                                     |
| 44      | PE10   | I/O  | Z                | --                                                                                                     |
| 45      | IOVDD2 | P    | --               | IO Power for PE10~PE15                                                                                 |
| 46      | IOVDD  | P    | --               | IO Power for PA12~PA15, PB0~PB15, PC0~PC13, PD0~PD15, PE0~PE9, PF0~PF5, PV0~PV1                        |
| 47      | PE9    | I/O  | Z                | ADC12(ADC Input Channel 12)<br>IO Wakeup Channel 12<br>SD0_DATA3(C)                                    |
| 48      | PE8    | I/O  | Z                | ADC11(ADC Input Channel 11)<br>IO Wakeup Channel 11<br>SD0_DATA2(C)<br>Ethnet MII_COL                  |
| 49      | PE7    | I/O  | Z                | ADC10(ADC Input Channel 10)<br>IO Wakeup Channel 10<br>SD0_DATA1(C)<br>Ethnet MII_TXERR                |
| 50      | PE6    | I/O  | Z                | ADC9(ADC Input Channel 9)<br>IO Wakeup Channel 9<br>SD0_CLK(C)<br>Ethnet MII_RXDV                      |
| 51      | PE5    | I/O  | Z                | ADC8(ADC Input Channel 8)<br>IO Wakeup Channel 8<br>SD0_CMD(C)<br>Ethnet MII_RXCK<br>Sensor0_SYNC1(A)  |
| 52      | PE4    | I/O  | Z                | ADC7(ADC Input Channel 7)<br>IO Wakeup Channel 7<br>SD0_DATA0(C)<br>Ethnet MII_RX3<br>Sensor0_SYNC0(A) |
| 53      | PE3    | I/O  | Z                | SensorX_CLK<br>Sensor0_CLK(A)<br>Ethnet MII_RX2                                                        |

| Pin No. | Name | Type | IO Initial State | Description                                                                             |
|---------|------|------|------------------|-----------------------------------------------------------------------------------------|
| 54      | PE2  | I/O  | Z                | SensorX_D7<br>Sensor0_D9(A)<br>Ethnet MII_RX1<br>Ethnet RMII_RX1(A)                     |
| 55      | PE1  | I/O  | Z                | SensorX_D6<br>Sensor0_D8(A)<br>Ethnet MII_RX0<br>Ethnet RMII_RX0(A)                     |
| 56      | PE0  | I/O  | Z                | SensorX_D5<br>Sensor0_D7(A)<br>Ethnet MII_CRS<br>Ethnet RMII_CRSDV(A)<br>SD1_CLK(B)     |
| 57      | PD15 | I/O  | Z                | SensorX_D4<br>Sensor0_D6(A)<br>Ethnet MII_TXCK<br>Ethnet RMII_REFCLK(A)<br>SD1_CMD(B)   |
| 58      | PD14 | I/O  | Z                | SensorX_D3<br>Sensor0_D5(A)<br>Ethnet MII_RXERR<br>Ethnet RMII_RXERR(A)<br>SD1_DATA0(B) |
| 59      | PD13 | I/O  | Z                | SensorX_D2<br>Sensor0_D4(A)<br>Ethnet MII_TXEN<br>Ethnet RMII_TXEN(A)<br>SD1_DATA1(B)   |
| 60      | PD12 | I/O  | Z                | SensorX_D1<br>Sensor0_D3(A)<br>Ethnet MII_TX1<br>Ethnet RMII_TX1(A)<br>SD1_DATA2(B)     |
| 61      | PD11 | I/O  | Z                | SensorX_D0<br>Sensor0_D2(A)<br>Ethnet MII_TX0<br>Ethnet RMII_TX0(A)<br>SD1_DATA3(B)     |

| Pin No. | Name    | Type | IO Initial State | Description                                                                         |
|---------|---------|------|------------------|-------------------------------------------------------------------------------------|
| 62      | PD10    | I/O  | Z                | ADC6(ADC Input Channel 6)<br>IO Wakeup Channel 6<br>Sensor0_D1(A)<br>Ethnet MII_TX3 |
| 63      | PD9     | I/O  | Z                | ADC5(ADC Input Channel 5)<br>IO Wakeup Channel 5<br>Sensor0_D0(A)<br>Ethnet MII_TX2 |
| 64      | USBAVDD | P    | --               | High Speed USB Power                                                                |
|         | IOVDD   | P    | --               | IO Power                                                                            |
| 65      | HUSBDM  | I/O  | 15kΩ Pull-down   | High Speed USB Negative Data                                                        |
| 66      | HUSBDP  | I/O  | 15kΩ Pull-down   | High Speed USB Positive Data                                                        |
| 67      | PD8     | I/O  | 10kΩ Pull-up     | MCLR(Device Reset)<br>ADC4(ADC Input Channel 4)<br>SD Power<br>IO Wakeup Channel 4  |
| 68      | FUSBDM  | I/O  | 15kΩ Pull-down   | Full Speed USB Negative Data<br>ADC15(ADC Input Channel 15)<br>IO Wakeup Channel 15 |
| 69      | FUSBDP  | I/O  | 15kΩ Pull-down   | Full Speed USB Positive Data<br>ADC14(ADC Input Channel 14)<br>IO Wakeup Channel 14 |
| 70      | PD7     | I/O  | Z                | ADC3(ADC Input Channel 3)<br>IO Wakeup Channel 3<br>SD0_CLK(A)                      |
| 71      | PD6     | I/O  | Z                | ADC2(ADC Input Channel 2)<br>IO Wakeup Channel 2<br>SD0_CMD(A)                      |
| 72      | PD5     | I/O  | Z                | SD0_DATA0(A)                                                                        |
| 73      | PD4     | I/O  | Z                | SD0_DATA1(A)                                                                        |
| 74      | PD3     | I/O  | Z                | SD0_DATA2(A)                                                                        |
| 75      | PD2     | I/O  | Z                | SD0_DATA3(A)                                                                        |
| 76      | DVDD    | P    | --               | Digital Logic Power                                                                 |
| 77      | PD1     | I/O  | 10kΩ Pull-up     | Hold down 0 to reset<br>ADC1(ADC Input Channel 1)<br>IO Wakeup Channel 1            |
| 78      | PD0     | I/O  | Z                | ADC0(ADC Input Channel 0)<br>IO Wakeup Channel 0                                    |
| 79      | PF5     | I/O  | Z                | SFCTZ_DO<br>SPITZ_DO                                                                |

| Pin No. | Name     | Type | IO Initial State | Description                                                             |
|---------|----------|------|------------------|-------------------------------------------------------------------------|
| 80      | PF4      | I/O  | Z                | SFCTZ_CLK<br>SPITZ_CLK                                                  |
| 81      | PF3      | I/O  | Z                | SFCTZ_DATA3<br>SPITZ_DATA3                                              |
| 82      | FSPG     | I/O  | Z                | Flash Power Output                                                      |
|         | PC13     | I/O  | Z                | ADC13(ADC Input Channel 13)<br>IO Wakeup Channel 13                     |
| 83      | PF2      | I/O  | Z                | SFCTZ_DATA2<br>SPITZ_DATA2                                              |
| 84      | PF1      | I/O  | Z                | SFCTZ_DI<br>SPITZ_DI                                                    |
| 85      | PF0      | I/O  | Z                | SFCTZ_CS<br>SPITZ_CS                                                    |
| 86      | PR1      | I/O  | Z                | 32k Crystal Oscillator Output                                           |
| 87      | PR0      | I/O  | Z                | 32k Crystal Oscillator Input                                            |
| 88      | RTCVDD33 | P    | --               | RTC Power for PR0~PR1                                                   |
| 89      | PV1      | I/O  | Z                | AVDD18                                                                  |
| 90      | PV0      | I/O  | Z                | AVDD28                                                                  |
| 91      | IOVDD    | P    | --               | IO Power                                                                |
| 92      | DCVDD    | P    | --               | DCDC Power                                                              |
| 93      | VBAT     | P    | --               | Battery Input                                                           |
| 94      | SW       | P    | --               | Buck DCDC Switch Port                                                   |
| 95      | PGND     | G    | --               | Ground of Buck DC-DC converter                                          |
| 96      | PC12     | I/O  | Z                | AIN_BN0(Audio ADC Negative Input)                                       |
| 97      | PC11     | I/O  | Z                | AIN_BP0(Audio ADC Positive Input)                                       |
| 98      | PC10     | I/O  | 10kΩ Pull-down   | LVD(External Low Voltage Detection Input)<br>MICBIASB (MIC Bias Output) |
| 99      | NC       | --   | --               | --                                                                      |
| 100     | AUVSS    | G    | --               | Audio Ground                                                            |
| 101     | VCM      | P    | --               | Audio Reference Power                                                   |
| 102     | PC9      | I/O  | Z                | MICBIASA (MIC Bias Output)<br>Right Channel DAC Output                  |
| 103     | PC8      | I/O  | Z                | Left Channel DAC Output                                                 |
| 104     | PC7      | I/O  | Z                | AIN_AP0(Audio ADC Positive Input)                                       |
| 105     | PC6      | I/O  | Z                | AIN_AN0(Audio ADC Negative Input)                                       |
| 106     | PC5      | I/O  | Z                | AIN_BN1(Audio ADC Negative Input)                                       |
| 107     | PC4      | I/O  | Z                | AIN_BP1(Audio ADC Positive Input)                                       |
| 108     | PC3      | I/O  | Z                | AIN_AP1(Audio ADC Positive Input)                                       |
| 109     | PC2      | I/O  | Z                | AIN_AN1(Audio ADC Negative Input)<br>Sensor1_SYNC1(B)                   |

| Pin No. | Name | Type | IO Initial State | Description                                                                              |
|---------|------|------|------------------|------------------------------------------------------------------------------------------|
| 110     | PC1  | I/O  | Z                | Sensor1_SYNC0(B)<br>LCD_DATA7(B)<br>PAP_D7(B)                                            |
| 111     | PC0  | I/O  | Z                | Sensor1_CLK(B)<br>LCD_DATA6(B)<br>PAP_D6(B)                                              |
| 112     | PB15 | I/O  | Z                | LCD_DATA23(A)<br>Sensor1_D7(B)<br>LCD_DATA5(B)<br>PAP_D5(B)<br>SD1_CLK(A)                |
| 113     | PB14 | I/O  | Z                | LCD_DATA22(A)<br>Sensor1_D6(B)<br>LCD_DATA4(B)<br>PAP_D4(B)<br>SD1_CMD(A)                |
| 114     | PB13 | I/O  | Z                | LCD_DATA21(A)<br>Sensor1_D5(B)<br>LCD_DATA3(B)<br>PAP_D3(B)<br>SD1_DATA0(A)              |
| 115     | PB12 | I/O  | Z                | LCD_DATA20(A)<br>Sensor1_D4(B)<br>LCD_DATA2(B)<br>PAP_D2(B)<br>SD1_DATA1(A)              |
| 116     | PB11 | I/O  | Z                | LCD_DATA19(A)<br>Sensor1_D3(B)<br>LCD_DATA1(B)<br>PAP_D1(B)<br>SD1_DATA2(A)<br>TS1_DATA7 |
| 117     | PB10 | I/O  | Z                | LCD_DATA18(A)<br>Sensor1_D2(B)<br>LCD_DATA0(B)<br>PAP_D0(B)<br>SD1_DATA3(A)<br>TS1_DATA6 |
| 118     | PB9  | I/O  | Z                | LCD_DATA17(A/B)<br>Sensor1_D1(B)<br>TS1_DATA5                                            |

| Pin No. | Name | Type | IO Initial State | Description                                                                   |
|---------|------|------|------------------|-------------------------------------------------------------------------------|
| 119     | PB8  | I/O  | Z                | LCD_DATA16(A/B)<br>Sensor1_D0(B)<br>TS1_DATA4                                 |
| 120     | PB7  | I/O  | Z                | LCD_DATA15(A/B)<br>Sensor1_D7(A)<br>PAP_D15(A/B)<br>TS1_DATA3<br>SD0_CLK(D)   |
| 121     | PB6  | I/O  | Z                | LCD_DATA14(A/B)<br>Sensor1_D6(A)<br>PAP_D14(A/B)<br>TS1_DATA2<br>SD0_CMD(D)   |
| 122     | PB5  | I/O  | Z                | LCD_DATA13(A/B)<br>Sensor1_D5(A)<br>PAP_D13(A/B)<br>TS1_DATA1<br>SD0_DATA0(D) |
| 123     | PB4  | I/O  | Z                | LCD_DATA12(A/B)<br>Sensor1_D4(A)<br>PAP_D12(A/B)<br>TS1_DATA0<br>SD0_DATA1(D) |
| 124     | PB3  | I/O  | Z                | LCD_DATA11(A/B)<br>Sensor1_D3(A)<br>PAP_D11(A/B)<br>TS1_SYNC<br>SD0_DATA2(D)  |
| 125     | PB2  | I/O  | Z                | LCD_DATA10(A/B)<br>Sensor1_D2(A)<br>PAP_D10(A/B)<br>TS1_CLK<br>SD0_DATA3(D)   |
| 126     | PB1  | I/O  | Z                | LCD_DATA9(A/B)<br>Sensor1_D1(A)<br>PAP_D9(A/B)<br>TS1_VALID                   |
| 127     | PB0  | I/O  | Z                | LCD_DATA8(A/B)<br>Sensor1_D0(A)<br>PAP_D8(A/B)<br>TS1_ERROR                   |

| Pin No. | Name | Type | IO Initial State | Description                                       |
|---------|------|------|------------------|---------------------------------------------------|
| 128     | PA15 | I/O  | Z                | LCD_SYNC2(A/B)<br>Sensor1_SYNC1(A)                |
| 129     | PA14 | I/O  | Z                | LCD_SYNC1(A/B)<br>Sensor1_SYNC0(A)<br>PAP_RD(A/B) |
| 130     | PA13 | I/O  | Z                | LCD_DCLK(A/B)<br>Sensor1_CLK(A)<br>TS0_DATA7      |
| 131     | PA12 | I/O  | Z                | LCD_SYNC0(A/B)<br>PAP_WR(A/B)<br>TS0_DATA6        |
| 132     | DVDD | P    | --               | Digital Logic Power                               |

**Note**

1.IO initial state abbreviations Z--High resistance, H--High level, L--Low level, X--May be changed during power on.

2.Timer, CAN, MCPWM, QDEC, UART, LEDC, I<sup>2</sup>C, I<sup>2</sup>S and SPI functions can be remapped to any I/O (except PF/PR/PV/CSI/DSI).

**Table 2-2-2 Pin Types Description**

| Pin Type | Description | Pin Type | Description     |
|----------|-------------|----------|-----------------|
| P        | Power       | I/O      | Input or Output |
| G        | Ground      | I        | Input           |
| RF       | RF antenna  | O        | Output          |

## 3 Electrical Characteristics

### 3.1 Absolute Maximum Ratings

Table 3-1 Absolute Maximum Ratings

| Symbol           | Parameter                                      | Min  | Max  | Unit |
|------------------|------------------------------------------------|------|------|------|
| T <sub>opt</sub> | Operating temperature                          | -30  | +85  | °C   |
| T <sub>stg</sub> | Storage temperature                            | -65  | +150 | °C   |
| VBAT             | Supply Voltage                                 | -0.3 | 5.5  | V    |
| IOVDD            |                                                | -0.3 | 3.6  | V    |
| IOVDD2           |                                                | -0.3 | 3.6  | V    |
| IOVDD3           |                                                | -0.3 | 3.6  | V    |
| RTCVDD33         |                                                | -0.3 | 3.6  | V    |
| DCVDD            |                                                | -0.3 | 1.6  | V    |
| WVDD33           |                                                | -0.3 | 3.6  | V    |
| WVDD14           |                                                | -0.3 | 1.6  | V    |
| USBAVDD          |                                                | -0.3 | 3.6  | V    |
| AVD33            |                                                | -0.3 | 3.6  | V    |
| AVD12            |                                                | -0.3 | 1.6  | V    |
| GPIO             | Input voltage of GPIO (except PD2/PD3/PD4/PD5) | -0.3 | 3.6  | V    |
| HVTIO            | Input voltage of HVT-IO (PD2/PD3/PD4/PD5)      | -0.3 | 5.5  | V    |

**Note**

1.Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device.

### 3.2 ESD Ratings

Table 3-2 ESD Ratings

| Parameter           | Typ   | Test pin | Reference standard          |
|---------------------|-------|----------|-----------------------------|
| Human Body Mode     | ±4kV  | All pins | JEDEC EIA/JESD22-A114       |
| Machine Mode        | ±300V | All pins | JEDEC EIA/JESD22-A115       |
| Charge Device Model | ±1kV  | All pins | ANSI/ESDA/JEDEC JS-002-2022 |

### 3.3 PMU Characteristics

Table 3-3 PMU Characteristics

| Symbol                | Parameter       | Conditions             | Min | Typ | Max | Unit |
|-----------------------|-----------------|------------------------|-----|-----|-----|------|
| VBAT                  | Power supply    | --                     | 2.7 | 3.7 | 5.5 | V    |
| <b>Operating mode</b> |                 |                        |     |     |     |      |
| Symbol                | Parameter       | Conditions             | Min | Typ | Max | Unit |
| IOVDD                 | Voltage output  | --                     | 2.4 | 3.3 | 3.4 | V    |
|                       | Loading current | IOVDD=3.3V@VBAT = 3.9V | --  | --  | 200 | mA   |
| AVDD28                | Voltage output  | --                     | 2.5 | 2.8 | 3.2 | V    |

| Symbol         | Parameter       | Conditions                        | Min | Typ | Max | Unit |
|----------------|-----------------|-----------------------------------|-----|-----|-----|------|
|                | Loading current | AVDD28=2.8V@IOVDD = 3.3V          | --  | --  | 100 | mA   |
| AVDD18         | Voltage output  | --                                | 1.5 | 1.8 | 2.2 | V    |
|                | Loading current | AVDD18=1.8V@IOVDD = 3.3V          | --  | --  | 60  | mA   |
| DCVDD          | Voltage output  | --                                | --  | 1.4 | --  | V    |
|                | Loading current | DCVDD=1.4V@IOVDD = 3.3V, LDO mode | --  | --  | 60  | mA   |
|                |                 | DCVDD=1.4V@VBAT = 3.7V, DCDC mode | --  | --  | 180 | mA   |
| Low Power mode |                 |                                   |     |     |     |      |
| Symbol         | Parameter       | Conditions                        | Min | Typ | Max | Unit |
| IOVDD          | Loading current | IOVDD=3.0V@VBAT = 3.7V            | --  | --  | 10  | mA   |

### 3.4 IO Characteristics

Table 3-4 IO Characteristics

| Input Characteristics |                          |               |                                                                                                                                              |      |     |      |
|-----------------------|--------------------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------|------|-----|------|
| Symbol                | Parameter                | Conditions    | IO                                                                                                                                           | Min  | Max | Unit |
| V <sub>IL</sub>       | Low-Level Input Voltage  | IOVDD3 = 3.0V | PA1~PA11                                                                                                                                     | -0.3 | 1.0 | V    |
|                       |                          | IOVDD3 = 1.8V | PA1~PA11                                                                                                                                     | -0.3 | 0.5 | V    |
|                       |                          | IOVDD2 = 3.0V | PE10~PE15                                                                                                                                    | -0.3 | 1.0 | V    |
|                       |                          | IOVDD2 = 1.8V | PE10~PE15                                                                                                                                    | -0.3 | 0.5 | V    |
|                       |                          | IOVDD = 3.0V  | PA12~PA15<br>PB0~PB15<br>PC0~PC13<br>PD0~PD1<br>PD6~PD15<br>PE0~PE9<br>PF0~PF5<br>FUSBDP<br>FUSBDM<br>HUSBDP<br>HUSBDM<br>PR0~PR1<br>PV0~PV1 | -0.3 | 1.0 | V    |
|                       |                          |               |                                                                                                                                              |      |     |      |
|                       |                          |               |                                                                                                                                              |      |     |      |
|                       |                          |               |                                                                                                                                              |      |     |      |
|                       |                          |               |                                                                                                                                              |      |     |      |
|                       |                          |               |                                                                                                                                              |      |     |      |
|                       |                          |               |                                                                                                                                              |      |     |      |
|                       |                          |               |                                                                                                                                              |      |     |      |
|                       |                          | IOVDD = 3.0V  | PD2~PD5                                                                                                                                      | -0.3 | 1.0 | V    |
| V <sub>IH</sub>       | High-Level Input Voltage | IOVDD3 = 3.0V | PA1~PA11                                                                                                                                     | 2.0  | 3.3 | V    |
|                       |                          | IOVDD3 = 1.8V | PA1~PA11                                                                                                                                     | 1.3  | 2.0 | V    |
|                       |                          | IOVDD2 = 3.0V | PE10~PE15                                                                                                                                    | 2.0  | 3.3 | V    |
|                       |                          | IOVDD2 = 1.8V | PE10~PE15                                                                                                                                    | 1.3  | 2.0 | V    |
|                       |                          | IOVDD = 3.0V  | PA12~PA15<br>PB0~PB15<br>PC0~PC13<br>PD0~PD1                                                                                                 | 2.0  | 3.3 | V    |
|                       |                          |               |                                                                                                                                              |      |     |      |

|                        |                |                                 | PD6~PD15<br>PE0~PE9<br>PF0~PF5<br>FUSBDP<br>FUSBDM<br>HUSBDP<br>HUSBDM<br>PR0~PR1<br>PV0~PV1 |                                                |      |   |
|------------------------|----------------|---------------------------------|----------------------------------------------------------------------------------------------|------------------------------------------------|------|---|
|                        |                | IOVDD = 3.0V                    | PD2~PD5                                                                                      | 2.0                                            | 5.5  | V |
| Output Characteristics |                |                                 |                                                                                              |                                                |      |   |
| Symbol                 | Parameter      | Conditions                      | IO                                                                                           | Typ                                            | Unit |   |
| I <sub>OL</sub>        | Output Current | IOVDD3 = 3.0V<br>Voutput = 0.3V | PA1~PA11                                                                                     | 2.5(HD=0)<br>8(HD=1)<br>18.5(HD=2)<br>24(HD=3) | mA   |   |
|                        |                | IOVDD3 = 1.8V<br>Voutput = 0.2V |                                                                                              |                                                |      |   |
|                        |                | IOVDD2 = 3.0V<br>Voutput = 0.3V | PE10~PE15                                                                                    | 2.5(HD=0)<br>8(HD=1)<br>18.5(HD=2)<br>24(HD=3) | mA   |   |
|                        |                | IOVDD2 = 1.8V<br>Voutput = 0.2V |                                                                                              |                                                |      |   |
|                        |                | IOVDD = 3.0V<br>Voutput = 0.3V  | PA12~PA15<br>PB0~PB15<br>PC0~PC13<br>PD0~PD1<br>PD6~PD15<br>PE0~PE9<br>PF0~PF5               | 2.5(HD=0)<br>8(HD=1)<br>18.5(HD=2)<br>24(HD=3) | mA   |   |
|                        |                |                                 | PR0~PR1<br>PV0~PV1                                                                           | 2.5(HD=0)<br>18.5(HD=1)                        | mA   |   |
|                        |                |                                 | FUSBDP<br>FUSBDM<br>HUSBDP<br>HUSBDM<br>PD2~PD5                                              | 8                                              | mA   |   |
|                        |                |                                 |                                                                                              |                                                |      |   |
| I <sub>OH</sub>        | Output Current | IOVDD3 = 3.0V<br>Voutput = 2.7V | PA1~PA11                                                                                     | 2.5(HD=0)<br>8(HD=1)<br>18.5(HD=2)<br>24(HD=3) | mA   |   |
|                        |                | IOVDD3 = 1.8V<br>Voutput = 1.6V |                                                                                              |                                                |      |   |
|                        |                | IOVDD2 = 3.0V<br>Voutput = 2.7V | PE10~PE15                                                                                    | 2.5(HD=0)<br>8(HD=1)                           | mA   |   |

|                                     |                      |                                                          |                                                                                |                                                |      |
|-------------------------------------|----------------------|----------------------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------------|------|
|                                     |                      | IOVDD2 = 1.8V<br>Voutput = 1.6V                          |                                                                                | 18.5(HD=2)<br>24(HD=3)                         |      |
|                                     |                      | IOVDD = 3.0V<br>Voutput = 2.7V                           | PA12~PA15<br>PB0~PB15<br>PC0~PC13<br>PD0~PD1<br>PD6~PD15<br>PE0~PE9<br>PF0~PF5 | 2.5(HD=0)<br>8(HD=1)<br>18.5(HD=2)<br>24(HD=3) | mA   |
|                                     |                      |                                                          | PR0~PR1<br>PV0~PV1                                                             | 2.5(HD=0)<br>18.5(HD=1)                        | mA   |
|                                     |                      |                                                          | FUSBDP<br>FUSBDM<br>HUSBDP<br>HUSBDM<br>PD2~PD5                                | 8                                              | mA   |
| Internal Resistance Characteristics |                      |                                                          |                                                                                |                                                |      |
| Symbol                              | Parameter            | Conditions                                               | IO                                                                             | Typ                                            | Unit |
| R <sub>pu</sub>                     | Pull-up Resistance   | IOVDD = 3.0V<br>IOVDD2 = 3.0V/1.8V<br>IOVDD3 = 3.0V/1.8V | PA1~PA15<br>PB0~PB15<br>PC0~PC13<br>PD0~PD1<br>PD6~PD15<br>PE0~PE15<br>PF0~PF5 | 10k                                            | Ω    |
|                                     |                      |                                                          | HUSBDP                                                                         | 1.5k(PU=1)<br>1k(PU=2/3)                       | Ω    |
|                                     |                      |                                                          | FUSBDP                                                                         | 1.5k                                           | Ω    |
|                                     |                      |                                                          | FUSBDM                                                                         | 180k                                           | Ω    |
| R <sub>pd</sub>                     | Pull-down Resistance | IOVDD = 3.0V<br>IOVDD2 = 3.0V/1.8V<br>IOVDD3 = 3.0V/1.8V | PA1~PA15<br>PB0~PB15<br>PC0~PC13<br>PD0~PD1<br>PD6~PD15<br>PE0~PE15<br>PF0~PF5 | 10k                                            | Ω    |
|                                     |                      |                                                          | HUSBDP<br>HUSBDM<br>FUSBDP<br>FUSBDM                                           | 15k                                            | Ω    |

**Note**

1.Internal pull-up/pull-down resistance accuracy ±20%.

### 3.5 Audio DAC Characteristics

Table 3-5 Stereo DAC Characteristics

| Parameter          | Conditions                                                                                    | Min | Typ | Max | Unit  |
|--------------------|-----------------------------------------------------------------------------------------------|-----|-----|-----|-------|
| Resolution         | --                                                                                            | --  | 16  | --  | bits  |
| Output Sample Rate | --                                                                                            | 8   | --  | 96  | kHz   |
| SNR                | Differential Mode<br>Fin=1kHz@0dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>load=10kΩ   | --  | 103 | --  | dB    |
|                    | Single Mode<br>Fin=1kHz@0dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>load=10kΩ         | --  | 100 | --  | dB    |
| Dynamic Range      | Differential Mode<br>Fin=1kHz@-60dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>load=10kΩ | --  | 103 | --  | dB    |
|                    | Single Mode<br>Fin=1kHz@-60dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>load=10kΩ       | --  | 100 | --  | dB    |
| THD+N              | Differential Mode<br>Fin=1kHz@0dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>load=10kΩ   | --  | -87 | --  | dB    |
|                    | Single Mode<br>Fin=1kHz@0dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>load=10kΩ         | --  | -75 | --  | dB    |
| Noise Floor        | Differential Mode<br>B/W=20Hz~20kHz A-Weighted<br>load=10kΩ                                   | --  | 6.4 | --  | uVrms |
|                    | Single Mode<br>B/W=20Hz~20kHz A-Weighted<br>load=10kΩ                                         | --  | 5.4 | --  | uVrms |

### 3.6 Audio ADC Characteristics

Table 3-6 Audio ADC Characteristics

| Parameter         | Conditions                                                                                             | Min | Typ  | Max | Unit |
|-------------------|--------------------------------------------------------------------------------------------------------|-----|------|-----|------|
| Resolution        | --                                                                                                     | --  | 16   | --  | bits |
| Input Sample Rate | --                                                                                                     | 8   | --   | 48  | kHz  |
| SNR               | Differential input Mode<br>Fin=1kHz@0dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>ADC gain=0dB   | --  | 95   | --  | dB   |
|                   | Single-ended input Mode<br>Fin=1kHz@0dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>ADC gain=0dB   | --  | 92   | --  | dB   |
| Dynamic Range     | Differential input Mode<br>Fin=1kHz@-60dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>ADC gain=0dB | --  | 95   | --  | dB   |
|                   | Single-ended input Mode<br>Fin=1kHz@-60dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>ADC gain=0dB | --  | 92   | --  | dB   |
| THD+N             | Differential input Mode<br>Fin=1kHz@0dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>ADC gain=0dB   | --  | -87  | --  | dB   |
|                   | Single-ended input Mode<br>Fin=1kHz@0dBFS<br>Fs=44.1kHz<br>B/W=20Hz~20kHz A-Weighted<br>ADC gain=0dB   | --  | -81  | --  | dB   |
| Analogue Gain     |                                                                                                        | -6  | --   | 28  | dB   |
| Max Input Level   | Differential input Mode<br>ADC gain=0dB                                                                | --  | 0.7  | --  | Vrms |
|                   | Single-ended input Mode<br>ADC gain=0dB                                                                | --  | 0.35 | --  | Vrms |

### 3.7 BT Characteristics

#### 3.7.1 Transmitter

Table 3-7-1 Transmitter characteristics

| Parameter                 | Conditions                     | Min | Typ | Max | Unit |
|---------------------------|--------------------------------|-----|-----|-----|------|
| Maximum RF Transmit Power | BR                             | --  | 19  | --  | dBm  |
| Maximum RF Transmit Power | EDR $\pi/4$ DQPSK<br>EDR 8DPSK | --  | 19  | --  | dBm  |
| Relative Transmit Power   | EDR $\pi/4$ DQPSK<br>EDR 8DPSK | --  | 1.5 | --  | dB   |
| Maximum RF Transmit Power | BLE-1Mbps                      | --  | 19  | --  | dBm  |

#### 3.7.2 Receiver

Table 3-7-2 Receiver characteristics

| Parameter   | Conditions        | Min | Typ   | Max | Unit |
|-------------|-------------------|-----|-------|-----|------|
| Sensitivity | BR                | --  | -95.5 | --  | dBm  |
|             | EDR $\pi/4$ DQPSK | --  | -96   | --  | dBm  |
|             | EDR 8DPSK         | --  | -88   | --  | dBm  |
|             | BLE-1Mbps         | --  | -98   | --  | dBm  |
|             | BLE-2Mbps         | --  | -95   | --  | dBm  |
|             | BLE-S2            | --  | -101  | --  | dBm  |
|             | BLE-S8            | --  | -106  | --  | dBm  |

### 3.8 WiFi Characteristics

#### 3.8.1 Transmitter

TX Power with Spectral Mask and EVM Meeting 802.11 Standards.

Table 3-8-1 Transmitter characteristics

| Parameter | Conditions             | Min | Typ | Max | Unit |
|-----------|------------------------|-----|-----|-----|------|
| TX Power  | 802.11b, 1 Mbps, DSSS  | --  | 19  | --  | dBm  |
|           | 802.11b, 11 Mbps, CCK  | --  | 19  | --  | dBm  |
|           | 802.11g, 6 Mbps, OFDM  | --  | 17  | --  | dBm  |
|           | 802.11g, 54 Mbps, OFDM | --  | 14  | --  | dBm  |
|           | 802.11n, HT20, MCS0    | --  | 17  | --  | dBm  |
|           | 802.11n, HT20, MCS7    | --  | 13  | --  | dBm  |
|           | 802.11n, HT40, MCS0    | --  | 17  | --  | dBm  |
|           | 802.11n, HT40, MCS7    | --  | 12  | --  | dBm  |

### 3.8.2 Receiver

For RX tests, the PER (packet error rate) limit is 8% for 802.11b, and 10% for 802.11g/n.

**Table 3-8-2 Receiver characteristics**

| Parameter   | Conditions             | Min | Typ   | Max | Unit |
|-------------|------------------------|-----|-------|-----|------|
| Sensitivity | 802.11b, 1 Mbps, DSSS  | --  | -97   | --  | dBm  |
|             | 802.11b, 2 Mbps, DSSS  | --  | -94.5 | --  | dBm  |
|             | 802.11b, 5.5 Mbps, CCK | --  | -93   | --  | dBm  |
|             | 802.11b, 11 Mbps, CCK  | --  | -90   | --  | dBm  |
|             | 802.11g, 6 Mbps, OFDM  | --  | -93   | --  | dBm  |
|             | 802.11g, 9 Mbps, OFDM  | --  | -92   | --  | dBm  |
|             | 802.11g, 12 Mbps, OFDM | --  | -91   | --  | dBm  |
|             | 802.11g, 18 Mbps, OFDM | --  | -89   | --  | dBm  |
|             | 802.11g, 24 Mbps, OFDM | --  | -86   | --  | dBm  |
|             | 802.11g, 36 Mbps, OFDM | --  | -83   | --  | dBm  |
|             | 802.11g, 48 Mbps, OFDM | --  | -79   | --  | dBm  |
|             | 802.11g, 54 Mbps, OFDM | --  | -77   | --  | dBm  |
|             | 802.11n, HT20, MCS0    | --  | -93   | --  | dBm  |
|             | 802.11n, HT20, MCS1    | --  | -90.5 | --  | dBm  |
|             | 802.11n, HT20, MCS2    | --  | -88   | --  | dBm  |
|             | 802.11n, HT20, MCS3    | --  | -84.5 | --  | dBm  |
|             | 802.11n, HT20, MCS4    | --  | -81.5 | --  | dBm  |
|             | 802.11n, HT20, MCS5    | --  | -77   | --  | dBm  |
|             | 802.11n, HT20, MCS6    | --  | -75   | --  | dBm  |
|             | 802.11n, HT20, MCS7    | --  | -74   | --  | dBm  |
|             | 802.11n, HT40, MCS0    | --  | -89   | --  | dBm  |
|             | 802.11n, HT40, MCS1    | --  | -86   | --  | dBm  |
|             | 802.11n, HT40, MCS2    | --  | -84   | --  | dBm  |
|             | 802.11n, HT40, MCS3    | --  | -80   | --  | dBm  |
|             | 802.11n, HT40, MCS4    | --  | -77.5 | --  | dBm  |
|             | 802.11n, HT40, MCS5    | --  | -72.5 | --  | dBm  |
|             | 802.11n, HT40, MCS6    | --  | -71.5 | --  | dBm  |
|             | 802.11n, HT40, MCS7    | --  | -70   | --  | dBm  |
|             | 802.11n, HT40, MCS32   | --  | -89   | --  | dBm  |

## 4 Package Information

### 4.1 QFN132\_10\*10mm

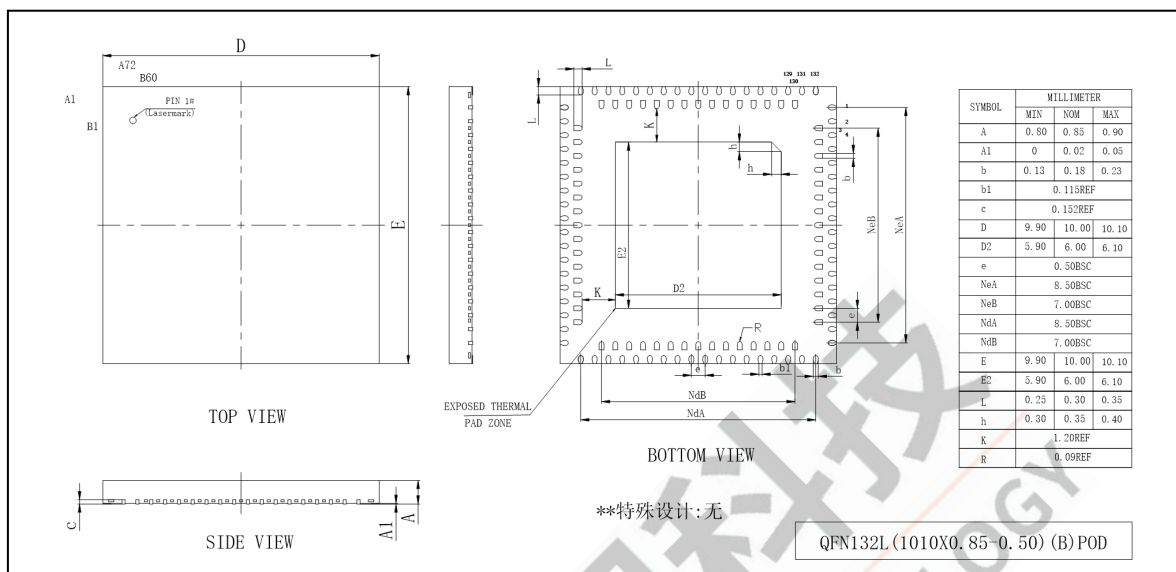


Figure 4-1 AE7926C Package

## 5 IC Marking Information

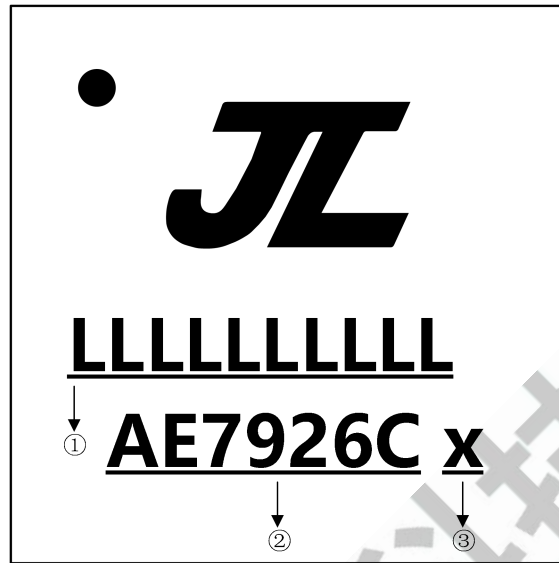


Figure 5-1 AE7926C Package Outline

- ① Production Batch
- ② Chip Model
- ③ Built-in DDR size
  - 0 No Flash Memory
  - 2 2Mbit flash
  - 4 4Mbit flash
  - 8 8Mbit flash
  - 6 16Mbit flash
  - 3 32Mbit flash
  - 5 64Mbit flash
  - 7 128Mbit flash
  - A 1Mx16 SDRAM
  - B 4Mx16 SDRAM
  - E 4Mx16bit DDR1
  - F 8Mx16bit DDR1
  - G 16Mx16bit DDR1

## 6 Solder-Reflow Condition

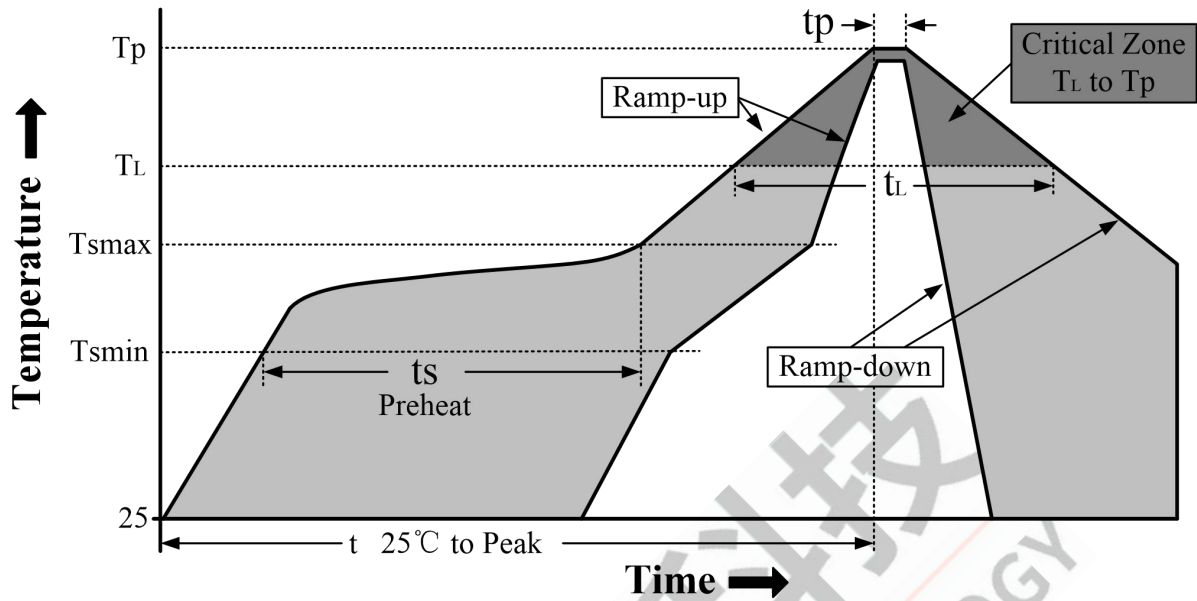


Figure 6-1 Classification Reflow Profile

Table 6-1 Classification Profiles

| Profile Feature                                                   |                                                  | Sn-Pb Eutectic Assembly | Pb-Free Assembly |
|-------------------------------------------------------------------|--------------------------------------------------|-------------------------|------------------|
| Preheat/Soak                                                      | Temperature Min ( $T_{smin}$ )                   | 100°C                   | 150°C            |
|                                                                   | Temperature Max ( $T_{smax}$ )                   | 150°C                   | 200°C            |
|                                                                   | Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ ) | 60-120 seconds          | 60-180 seconds   |
| Average ramp-up rate ( $T_{smax}$ to $T_p$ )                      |                                                  | 3°C/second max          | 3°C/second max   |
| Liquidous temperature ( $T_L$ )                                   |                                                  | 183°C                   | 217°C            |
| Time ( $t_L$ ) maintained above $T_L$                             |                                                  | 60-150 seconds          | 60-150 seconds   |
| Peak package body temperature ( $T_p$ )                           |                                                  | See Table 6-2           | See Table 6-3    |
| Time within 5°C of actual Peak Temperature ( $t_p$ ) <sup>2</sup> |                                                  | 10-30 seconds           | 20-40 seconds    |
| Ramp-down rate ( $T_p$ to $T_L$ )                                 |                                                  | 6°C/second max          | 6°C/second max   |
| Time 25°C to peak temperature                                     |                                                  | 6 minutes max           | 8 minutes max    |

**Note**

- 1.All temperatures refer to topside of the package, measured on the package body surface
- 2.Time within 5°C of actual peak temperature ( $t_p$ ) specified for the reflow profiles is a "supplier" and "user" maximum.

Table 6-2 SnPb Classification Temperature

| Package Thickness | Volume mm <sup>3</sup><br>< 350 | Volume mm <sup>3</sup><br>≥ 350 |
|-------------------|---------------------------------|---------------------------------|
| <2.5 mm           | 240 +0/-5°C                     | 225 +0/-5°C                     |
| ≥2.5 mm           | 225 +0/-5°C                     | 225 +0/-5°C                     |

**Table 6-3 Pb-free - Classification Temperature**

| Package Thickness | Volume mm <sup>3</sup><br>< 350 | Volume mm <sup>3</sup><br>350 - 2000 | Volume mm <sup>3</sup><br>> 2000 |
|-------------------|---------------------------------|--------------------------------------|----------------------------------|
| < 1.6mm           | 260℃                            | 260℃                                 | 260℃                             |
| 1.6 mm - 2.5mm    | 260℃                            | 250℃                                 | 245℃                             |
| > 2.5mm           | 250℃                            | 245℃                                 | 245℃                             |

**Note**

1.\*Tolerance The device manufacturer/supplier shall assure process compatibility up to and including the stated classification temperature (this means Peak reflow temperature +0℃.For example 260℃+0℃)at the rated MSL level.