
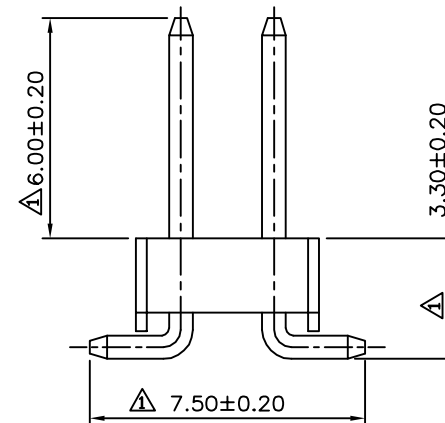


△ SPECIFICATION
 Current: 3A
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Withstanding Voltage: 1000V AC RMS
 Operation Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Housing: PA6T(UL94V-0), Black
 Contact: Copper Alloys, Gold Flash
 No. Of Contacts: 04~80 Contacts
 RoHS Compliant

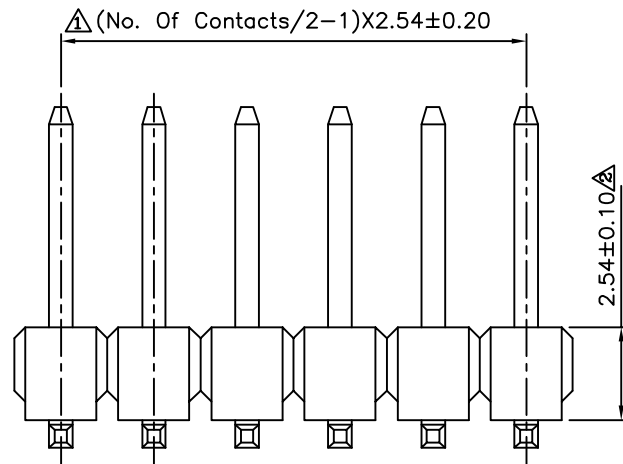

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

14112

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ± 0.38
 .XX ± 0.25
 ANG $\pm 5^{\circ}$

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	08/31/2011	
△ A1	Modify Data	HZF	11/25/2009	
△ A0	NEW RELEASE	SHIN	03/13/2006	