



# △ SPECIFICATION


Current:3A  
 Withstanding Voltage:1000V AC RMS  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operating Temperature:-55°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 △ Contact:Copper Alloys,Gold Flash Over Nickel  
 △ No. Of Contacts:3~40 Contacts  
 RoHS Compliant

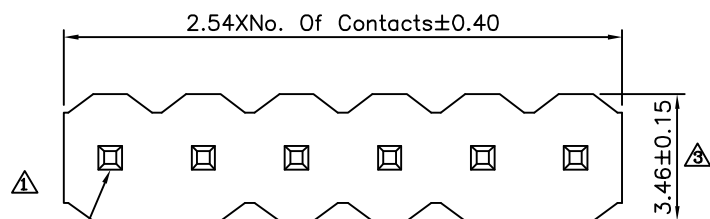


Pin 1

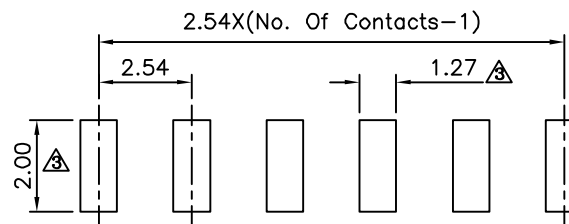

Recommended P.C.B. Layout

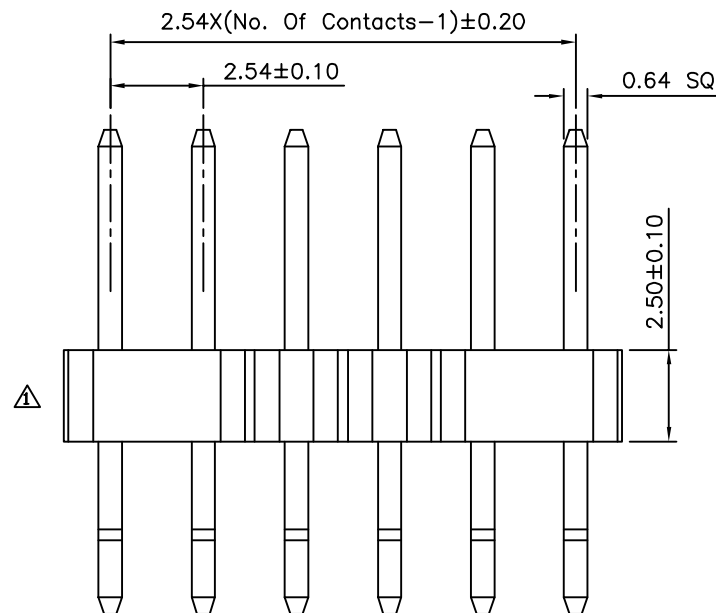

△ △

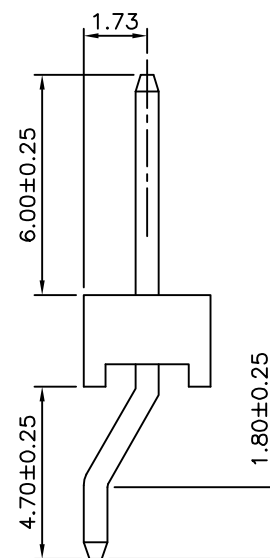

△ △

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

11182

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A3

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X  $\pm 0.38$   
 .XX  $\pm 0.25$   
 ANG.  $\pm 5^\circ$

UNIT  
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	10/12/2012
△ A2		Modify Data	HZF	05/28/2010
△ A1		Modify Data	HZF	03/17/2009
△ A0		NEW RELEASE	HZF	12/18/2006