

Square Root QR Covariance Steering

Naoya Kumagai

October 23, 2025

Abstract

This document provides an overview and technical documentation for the Square Root QR Covariance Steering method, including problem formulation, algorithmic details, and implementation notes.

1 Introduction

Covariance steering is a control technique for steering the mean and covariance of a stochastic system to desired terminal values. The proposed square root QR approach improves numerical stability and efficiency, at the expense of an iterative algorithm.

1.1 Notation and Preliminaries

Let $\mathbb{L}_+^n$ denote the space of lower triangular matrices with positive diagonal entries. The square root of a positive definite matrix $P \in \mathbb{R}^{n \times n}$ is defined as the unique lower triangular matrix $S \in \mathbb{L}_+^n$ such that $P = SS^\top$. The uniqueness is guaranteed by [cite]. $\text{diag}(M)$ denotes the vector of diagonal elements of matrix M .

1.2 Problem Formulation

We address the finite-horizon discrete-time covariance steering problem for a linear time-varying system with additive Gaussian noise. The goal is to find a state feedback controller that steers the state covariance from an initial value to a desired terminal value while minimizing a cost function, and under chance constraints. Mathematically, the problem is formulated as follows.

$$\min_{\{K_k\}_{k=0}^{N-1}} J = \sum_{k=0}^{N-1} \mathbb{E} [x_k^\top Q_k x_k + u_k^\top R_k u_k] \quad (1a)$$

$$\text{subject to } x_{k+1} = A_k x_k + B_k u_k + w_k, \quad k = 0, \dots, N-1 \quad (1b)$$

$$u_k = K_k x_k, \quad k = 0, \dots, N-1 \quad (1c)$$

$$x_0 \sim \mathcal{N}(\mu_0, P_{\text{init}}) \quad (1d)$$

$$P_N \leq P_f \quad (1e)$$

$$\mathbb{P}(x_k \in \mathcal{X}_k) \geq 1 - \epsilon_k, \quad k = 0, \dots, N \quad (1f)$$

$$\mathbb{P}(u_k \in \mathcal{U}_k) \geq 1 - \delta_k, \quad k = 0, \dots, N-1 \quad (1g)$$

where $x_k \in \mathbb{R}^n$ is the state vector, $u_k \in \mathbb{R}^m$ is the control input, $w_k \in \mathbb{R}^n$ is zero-mean Gaussian process noise with covariance Q_k , and $K_k \in \mathbb{R}^{m \times n}$ is the state feedback gain to be designed. The matrices A_k and B_k define the system dynamics, while Q_k and R_k are positive definite weighting matrices for the cost function. The sets $\mathcal{X}_k$ and $\mathcal{U}_k$ represent state and control constraints, respectively, with associated violation probabilities ϵ_k and δ_k .

We assume that the feasible region defined by the chance constraints is given in one of two forms: a linear constraint or a norm constraint. For the linear constraint form, the chance constraint can be expressed as:

$$\mathbb{P}(\alpha_j^\top x_k \leq \beta_j) \geq 1 - p_j \quad (2)$$

for each linear constraint defined by $\alpha_j \in \mathbb{R}^n$ and $\beta_j \in \mathbb{R}$, with violation probability p_j . For the norm constraint form, the chance constraint can be expressed as:

$$\mathbb{P}(\|x_k\|_2 \leq \gamma) \geq 1 - p_\gamma \quad (3)$$

for some scalar $\gamma > 0$ and violation probability p_γ . The same forms apply to the control input u_k .

1.3 Relevant works

The covariance steering problem has been well studied in the literature, and dates back to the early works by Hotz and Skelton [2]. Recent works mainly focus on converting the problem into a convex optimization problem. Skaf and Boyd [8] considers a state-history feedback controller and formulates the problem as a semidefinite programming (SDP) problem. Okamoto et al. [6] later adds chance constraints while maintaining convexity. However, these methods suffer from the poor computational complexity as the horizon length increases, due to the large linear matrix inequality (LMI) constraints involved [7]. It is also important to note that the problem variables involve the “square root” of the covariance. A more recently proposed method Liu et al. [3] uses the covariance directly as the optimization variable; in combination with an elegant proof of so-called “lossless convexification”, it converts the seemingly nonconvex problem into an equivalent convex problem. Compared to the block approach, this method scales much better with the growth in problem size. At the same time, we have observed several drawbacks of this method: first, the numerical stability is not ideal as we are working with units that square the system units. Second, when dealing with objective functions or constraints that involve the covariance square root (e.g., the chance constraints), iterative algorithms are required. Third, due to the requirement of a proof of lossless convexification, whenever the problem formulation changes slightly, theoretical work is required to ensure the convexity of the new formulation.

1.4 Contributions

2 Square root covariance propagation

First, review the square root covariance propagation, mainly used for Kalman filtering [9]. Let the system dynamics be given by:

$$x_{k+1} = \Phi_k x_k + w_k \quad (4)$$

with state $x_k \in \mathbb{R}^n$, where $w_k \in \mathbb{R}^m$ is zero-mean Gaussian noise with covariance Q_k . By defining $P_k := \mathbb{E}[(x_k - \mathbb{E}[x_k])(x_k - \mathbb{E}[x_k])^\top]$, the covariance propagation equation is given by:

$$P_{k+1} = \Phi_k P_k \Phi_k^\top + Q_k \quad (5)$$

If we define $S_k \in \mathbb{L}_+^n$ as the square root of the covariance P_k and $V_k \in \mathbb{L}_+^m$ as the square root of the process noise covariance Q_k , the square root form of the covariance propagation can be expressed as:

$$S_{k+1} S_{k+1}^\top = \Phi_k S_k S_k^\top \Phi_k^\top + V_k V_k^\top = X_{k+1} X_{k+1}^\top \quad (6)$$

where we define

$$X_{k+1} := [\Phi_k S_k \quad V_k] \in \mathbb{R}^{n \times (n+m)} \quad (7)$$

To avoid the issue of the right hand side not being a square matrix, we perform a QR decomposition such that

$$X_{k+1} Q_{k+1} = [0_{n \times m} \quad S_{k+1}^\top] \quad (8)$$

where $Q_{k+1} \in \mathbb{R}^{(n+m) \times (n+m)}$ is an orthogonal matrix. In other words, the square root covariance propagation can be expressed as a nonlinear operation involving the QR decomposition:

$$S_{k+1} = (\text{qr}(X_{k+1}^\top))^\top \quad (9)$$

where $\text{qr}(\cdot)$ denotes the operation of extracting the upper triangular factor R from the QR decomposition. This requires using $\text{qr}(\cdot, \text{'econ'})$ in MATLAB. In addition, to ensure uniqueness of the square root, if the $\text{qr}(\cdot)$ function returns an R matrix with negative diagonal entries, we multiply the corresponding columns of Q and rows of R by -1 to ensure positive diagonals.

2.1 QR decomposition derivative

In order to use this square root covariance propagation in an optimization framework, we require the derivative of the QR decomposition operation; this is documented in the literature [1], but for completeness, we provide a brief overview here. For a QR decomposition of $QR = X$ where R is upper triangular, the perturbation analysis is as follows. The derivative of the QR decomposition, i.e. the first-order perturbation analysis of the R matrix with respect to perturbations in the X matrix, is given by:

$$A + (dR)R^{-1} = Q^\top (dX)R^{-1} \quad (10)$$

where A is an antisymmetric (skew-symmetric) matrix such that

$$\text{lt}(A) = \text{lt}(Q^\top (dX)R^{-1}) \quad (11)$$

with $\text{lt}(A)$ replaces the upper triangular part of A with zeros. Organizing the above, we have:

$$dR = dR(dX, Q, R) := Q^\top (dX) - \text{lt}(Q^\top (dX)R^{-1})R \quad (12)$$

Which means that using the Taylor expansion, we can approximate the perturbed R matrix as:

$$\text{qr}(X + dX) \approx R(X) + dR(dX, Q(X), R(X)) \quad (13)$$

or,

$$\text{qr}(Z) \approx \text{qr}(X) + dR(Z - X, Q(X), R(X)) \quad (14)$$

2.2 Application to Covariance Propagation

The application to covariance steering is straightforward. Now, since the state is controlled by a feedback controller of the form

$$u_k = K_k x_k, \quad (15)$$

The dynamics become

$$x_{k+1} = (A_k + B_k K_k)x_k + w_k \quad (16)$$

and the covariance propagation becomes

$$P_{k+1} = \Phi_k P_k \Phi_k^\top + Q_k \quad (17)$$

where $\Phi_k = A_k + B_k K_k$. Note that since both P_k and K_k are unknowns, the problem is bilinear. We can however define $L_k = K_k S_k$. Then, K_k can be recovered as $K_k = L_k S_k^{-1}$. The inverse exists when the diagonals of S_k are non-zero, which is by definition guaranteed since S_k is the square root of a positive definite covariance matrix. So, X_{k+1} can be expressed as

$$X_{k+1} = [(A_k S_k + B_k L_k) \quad V_k] \quad (18)$$

2.3 Objective function

After substituting $u_k = K_k x_k = L_k S_k^{-1} x_k$, and some standard manipulations, the objective function can be expressed in terms of L_k and S_k as

$$J = \sum_{k=0}^{N-1} \text{trace}(Q_k S_k S_k^\top + R_k L_k L_k^\top) \quad (19)$$

which is convex in the variables.

2.4 Constraints

The initial covariance constraint $P_0 = P_{\text{init}}$ is imposed by:

$$S_0 = P_{\text{init}}^{1/2} \quad (20)$$

The terminal covariance constraint $P_N \leq P_f$ is imposed by:

$$\left\| P_f^{-1/2} S_N \right\|_2 - 1 \leq 0 \quad (21)$$

where $\|\cdot\|_2$ denotes the spectral norm. To ensure uniqueness of the square root, we impose:

$$\text{diag}(S_k) \geq 0, \quad k = 0, \dots, N \quad (22)$$

Since we are working with the square root form, chance constraints can also be imposed in a convex manner. For the linear constraint form (2), the chance constraint can be exactly expressed as:

$$\alpha_j^\top \mu_k + \Phi^{-1}(1 - p_j) \|S_k^\top \alpha_j\|_2 - \beta_j \leq 0 \quad (23)$$

where $\Phi^{-1}(\cdot)$ is the inverse of the standard normal cumulative distribution function. For the norm constraint form (3), the chance constraint can be conservatively approximated as:

$$\|\mu_k\|_2 + \sqrt{Q_{\chi_n^2}(1 - p_\gamma)} \|S_k\|_2 - \gamma \leq 0 \quad (24)$$

where $Q_{\chi_n^2}(\cdot)$ is the inverse of the chi-squared cumulative distribution function with n degrees of freedom. The control chance constraints can be imposed by replacing μ_k with v_k and S_k with L_k .

To summarize, (1) is converted into a nonconvex optimization problem as follows:

$$\min_{\{L_k, S_k\}_{k=0}^{N-1}} \quad (25)$$

3 Algorithm Overview


In order to take advantage of the convex representation of the objective and constraints, we use sequential convex programming (SCP). The nonlinear equality constraints arising from the covariance propagation are linearized at each iteration using the QR decomposition derivative described earlier, and at convergence, ensured that the nonlinear constraints are satisfied. By using the specific SCP algorithm **SCvx***, we can ensure that the converged solution is locally optimal. In our numerical experiments, the convergence is well-behaved, and compared to the globally optimal solution obtained from the full covariance steering method, the cost function values match to high precision. We use the same algorithm parameters as in [cite].

4 Numerical Examples


Use the same problem parameters as in Liu's paper. The convex optimization problems are solved in MATLAB using YALMIP [4] and MOSEK [5].

Some practical implementation tips:

- Since the algorithm requires iteratively linearizing the problem, an initial guess is required for each of the variables. The initial guess for S_k can be obtained by linearly interpolating between the square roots of the initial and terminal covariances.
- The initial guess for L_k can be set to zero.
- The trust region on L_k is not necessary. It was observed to cause chattering close to the solution.

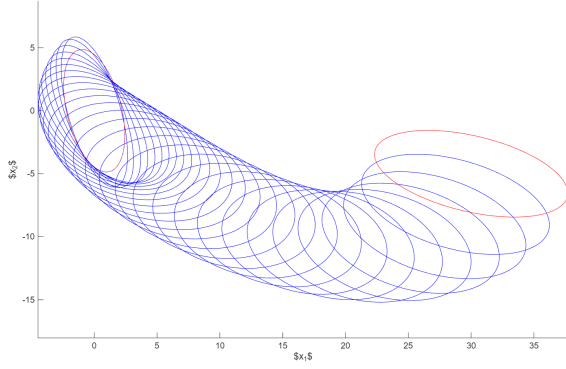

(a) Full covariance steering result

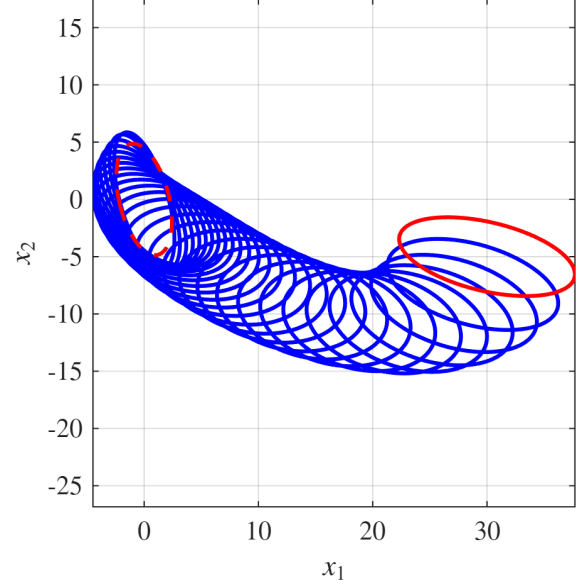

(b) Square root QR covariance steering result

Figure 1: Comparison of covariance steering results

4.1 Comparison with Full Covariance Approach

The cost function value match to 7 digits between the full covariance steering and the square root QR covariance steering methods.

5 Conclusions

6 Acknowledgements

This material is based upon work supported by the Air Force Office of Scientific Research under award number FA9550-23-10512. N. Kumagai acknowledges support for his graduate studies from the Shigeta Education Fund.

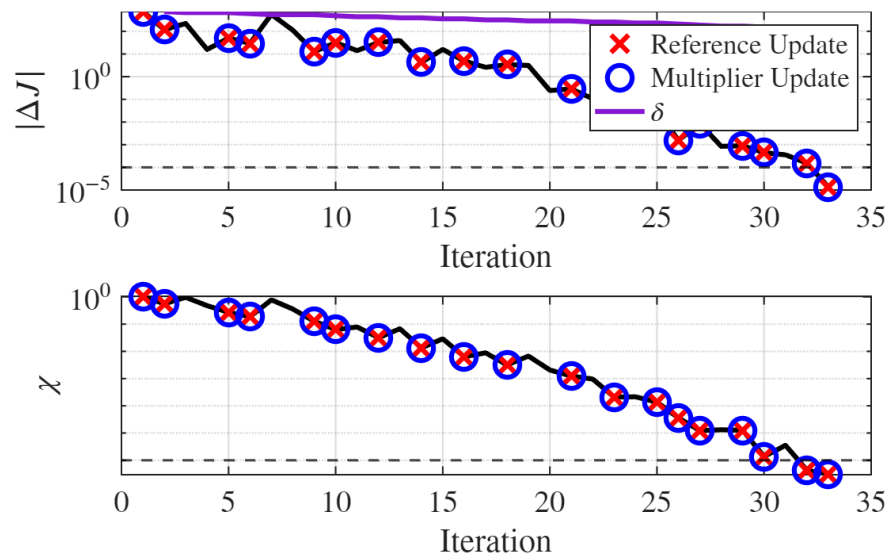


Figure 2: Convergence history of the square root QR covariance steering method

References

- [1] Jan De Leeuw. Differentiating the QR Decomposition, 2023.
- [2] Anthony Hotz and Robert E. Skelton. Covariance control theory. *Int. J. Control*, 46(1):13–32, July 1987.
- [3] Fengjiao Liu and Panagiotis Tsiotras. Optimal Covariance Steering for Continuous-Time Linear Stochastic Systems With Multiplicative Noise. *IEEE Transactions on Automatic Control*, 69(10):7247–7254, October 2024.
- [4] J. Lofberg. YALMIP : A toolbox for modeling and optimization in MATLAB. In *IEEE Int. Conf. Robot. Automat.*, pages 284–289, New Orleans, LA, September 2004.
- [5] MOSEK ApS. The MOSEK optimization toolbox for MATLAB manual. Version 11.0, 2025.
- [6] Kazuhide Okamoto, Maxim Goldshtein, and Panagiotis Tsiotras. Optimal Covariance Control for Stochastic Systems Under Chance Constraints. *IEEE Control Syst. Lett.*, 2(2):266–271, April 2018.
- [7] George Rapakoulias and Panagiotis Tsiotras. Discrete-Time Optimal Covariance Steering via Semidefinite Programming. In *IEEE 62nd Conf. Decis. Control*, pages 1802–1807, December 2023.
- [8] Joëlle Skaf and Stephen P. Boyd. Design of Affine Controllers via Convex Optimization. *IEEE Trans. Automat. Contr.*, 55(11):2476–2487, November 2010.
- [9] Byron D. Tapley, Bob E. Schutz, and George H. Born. *Statistical Orbit Determination*. Elsevier Academic Press, Amsterdam ; Boston, 2004.