


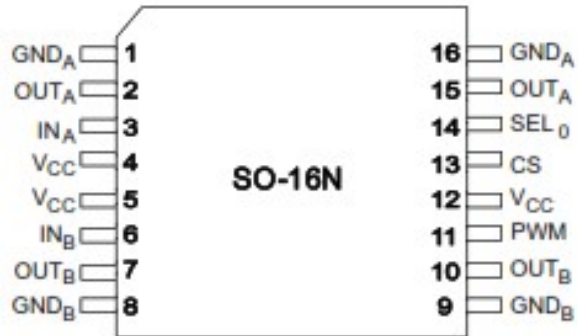

Pin N°	Symbol	Function
1, 16	GND_A	Source of low-side switch A
2, 15	OUT_A	Source of high-side switch A / drain of low-side switch A
3	IN_A	Clockwise input
4, 5, 12	V_{CC}	Power supply voltage
6	IN_B	Counter clockwise input
7, 10	OUT_B	Source of high-side switch B / drain of low-side switch B
8, 9	GND_B	Source of low-side switch B
11	PWM	Voltage controlled input pin with hysteresis, CMOS compatible. Gates of low-side FETS get modulated by the PWM signal during their on phase allowing speed control of the motor
13	CS	Multiplexed analog sense output pin; it delivers a current proportional to the motor current according to the leg selection.
14	SEL_0	Active high compatible with 3 V and 5 V CMOS outputs pin; in combination with IN_A , IN_B , it addresses the CurrentSense information delivered to the micro according to the operative truth table.