CANDIDATE R0 – USB / POWER / PHYSICAL RECOVERY
Integration interfaces J3/J4 are temporary schematic boundaries.
NOT A FABRICATION RELEASE. See proposal.md and review/verification.md.

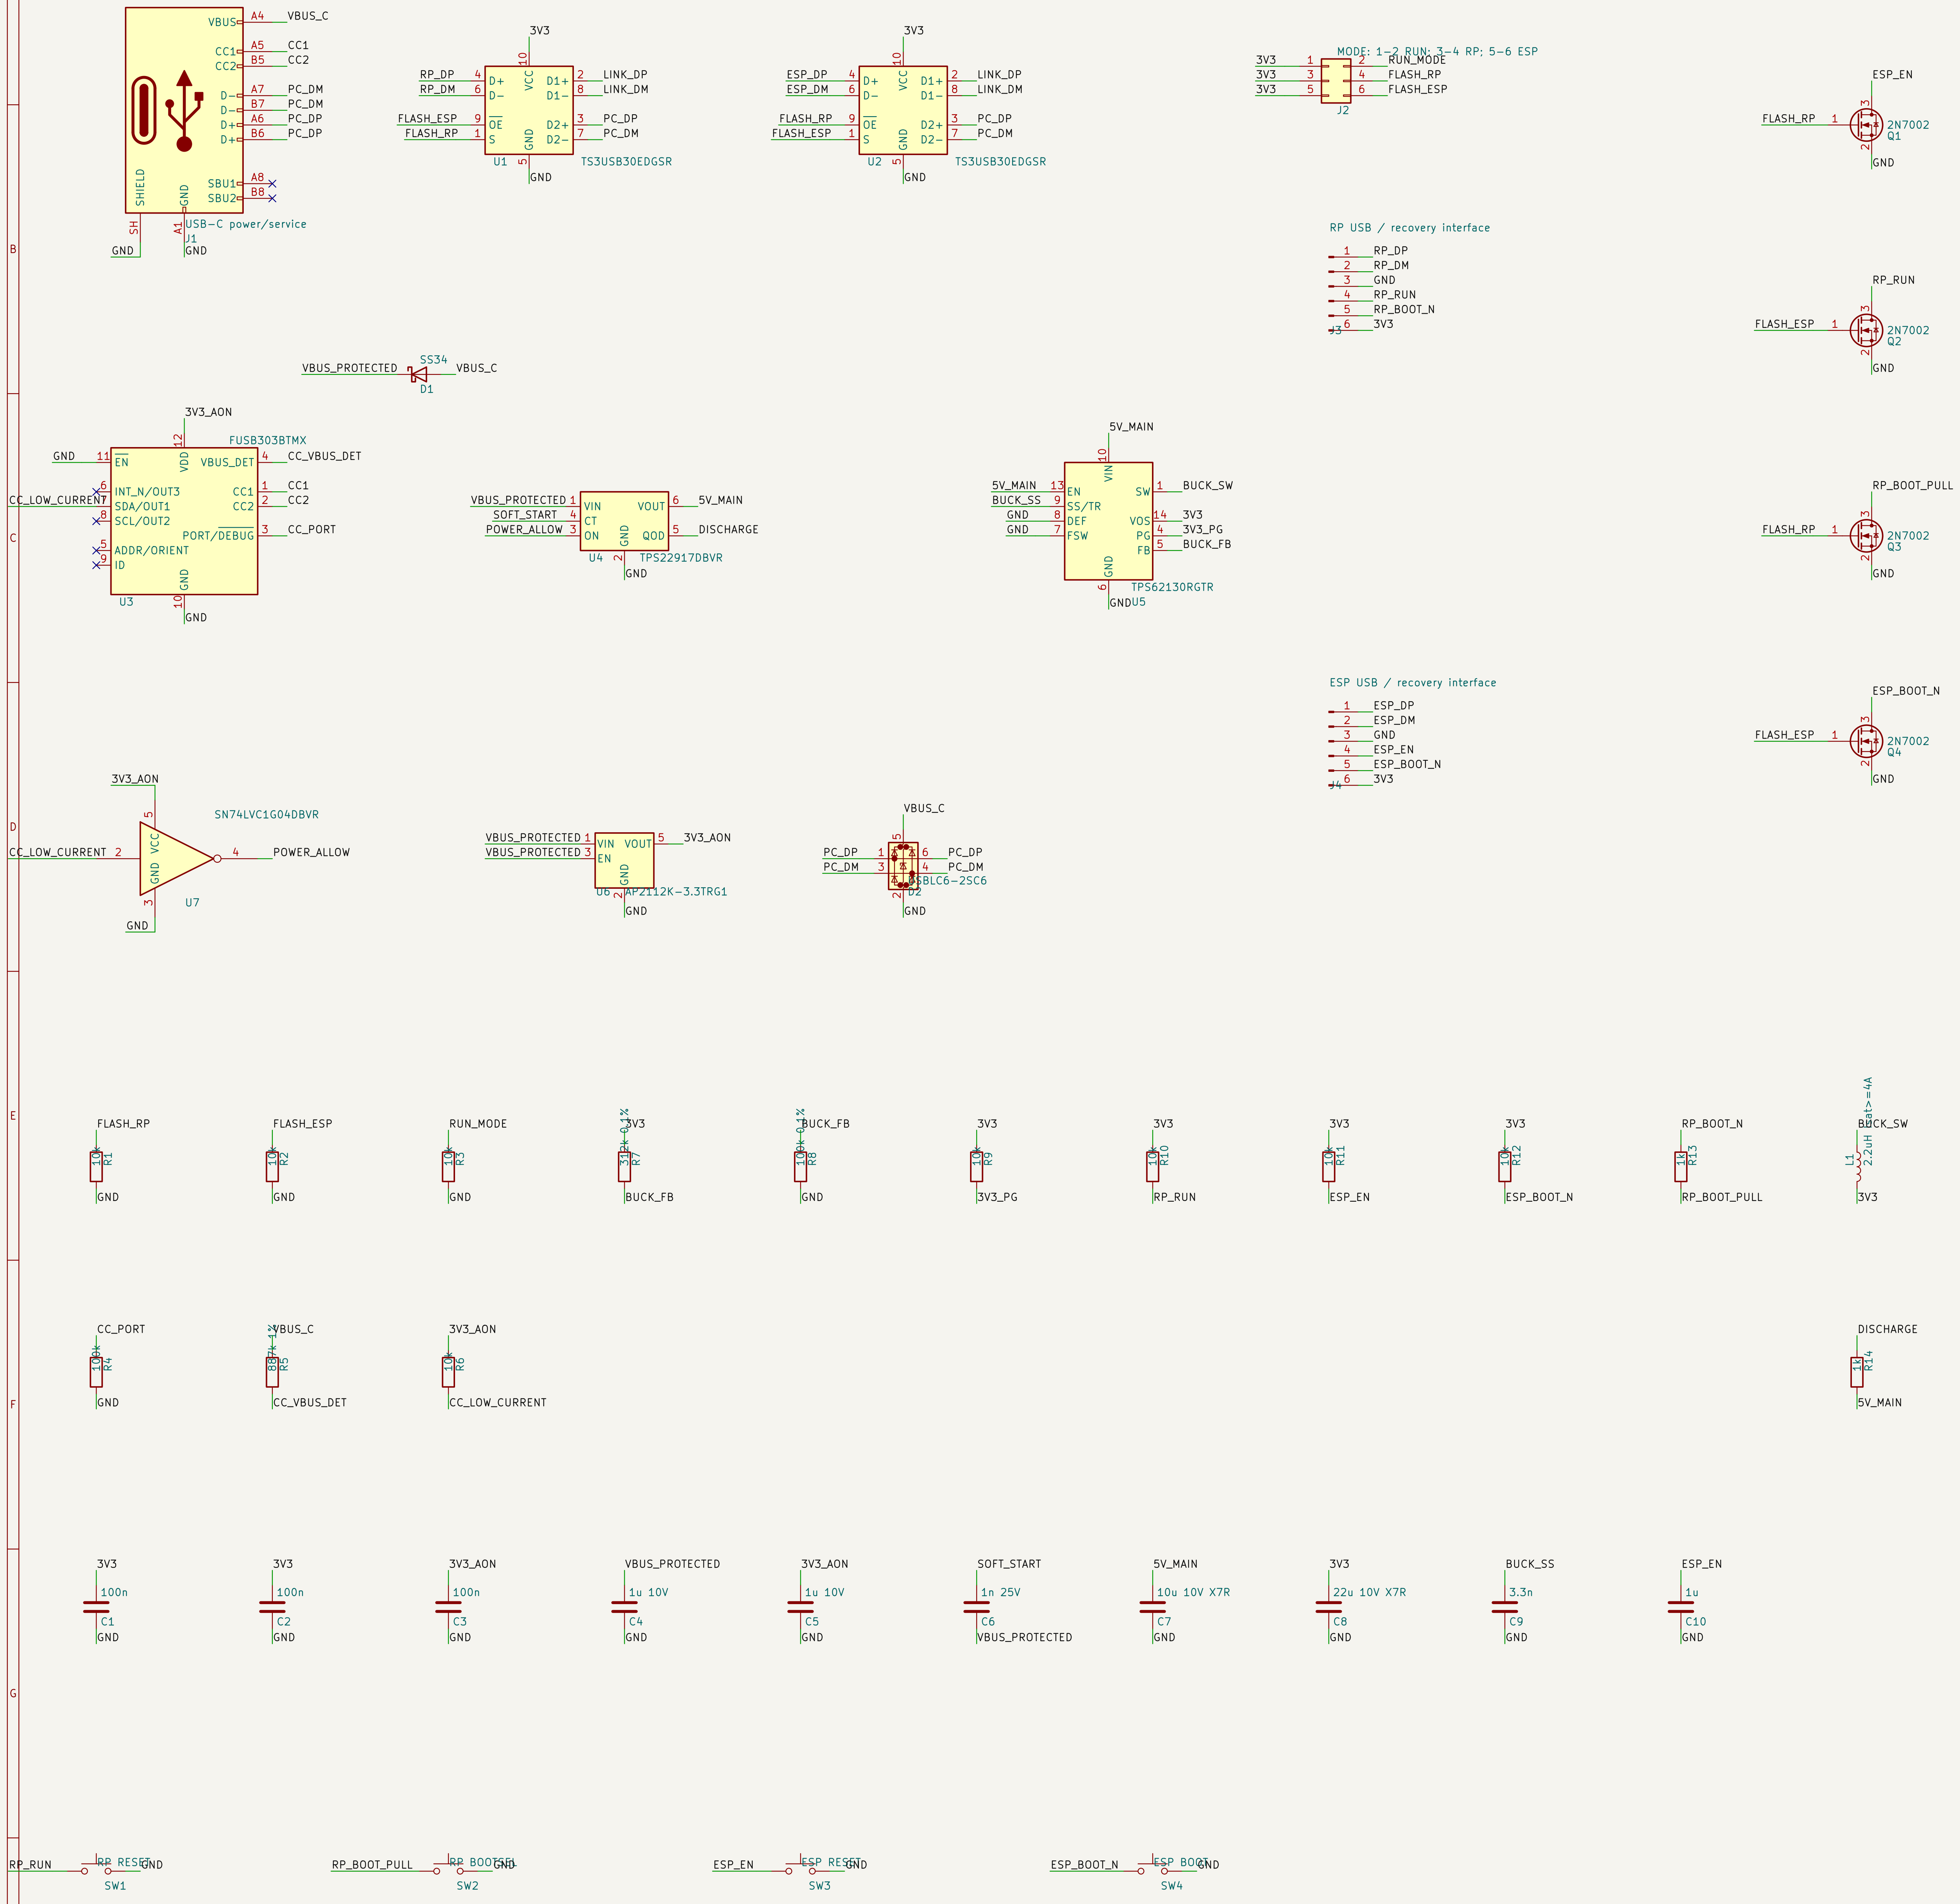

PWR_FLAG
GND

PWR_FLAG
VBUS_PROTECTED

PWR_FLAG
3V3

Select mode ONLY with USB unplugged and 3V3 discharged.
One shunt: RUN=1−2; FLASH RP=3−4; FLASH ESP=5−6.
Both FLASH shunts: both USB switches disabled; both CPUs reset.
RUN_MODE additionally qualifies the future Zorro output−enable circuit.

USB−C is ALWAYS a power sink. Run uses internal D+/D− only.
Supply / data−capable PC port must advertise >=1.5 A.
Default−current ports intentionally leave main rail OFF.
No external VBUS−source switch. No Amiga +5V power connection.

BOOT controls do not depend on application firmware.
Q1/Q2 hold the peer reset. Q3/Q4 force selected ROM boot.
RP_BOOT_N joins QSPI_SS through this sheet's 1k path.
27R RP and 22R ESP series resistors belong at MCU pins.

Power selection: CC OUT1 low permits main power.
FUSB303B GPIO mode: ADDR left open; PORT via 100k to GND.
TPS22917 CT capacitor goes to VIN, NOT GND.
No board placement or USB impedance claim at this stage.

Sheet: /
File: integrated−r0.kicad_sch
Title: Integrated R0: USB power and recovery candidate
Size: A2
Date: 2026−11−09
Rev: 0.1 – NOT FOR FABRICAT
KiCad E.D.A. 10.0.7
Id: 1/1