

Tiny Control Board for RPI 4 control board for Streamer Dac


Debouncer for NO momentory push buttons

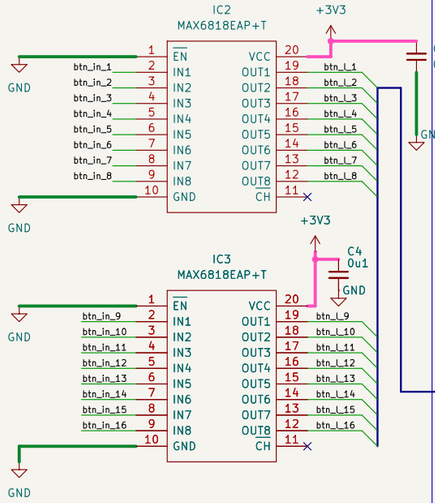

Expander adding an additional 16 GPIO pins, configured for button input only, I2C interface

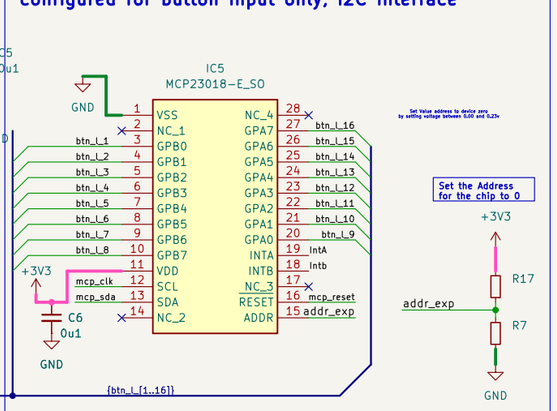

USB for MCU Programing and Testing and secondary 5V supply

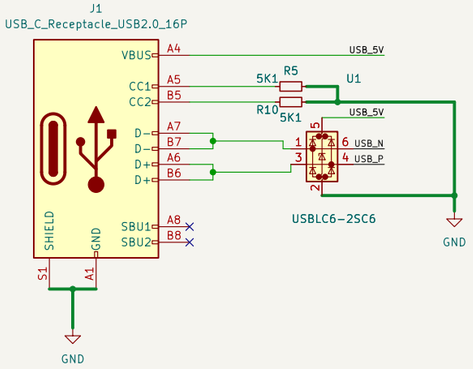


Debouncer CHips


External Connectors

Button Connectors for momentory SPST buttons , return to Ground Pins, Connector for Leds connected to cathodes on Blue leds with a forwared voltage of the anodes of the leds are connected to the +5 Volts supply connector on board


Supplies +5V for Leds and Buttons Earth Return is for buttons and not leds and rotary encoders

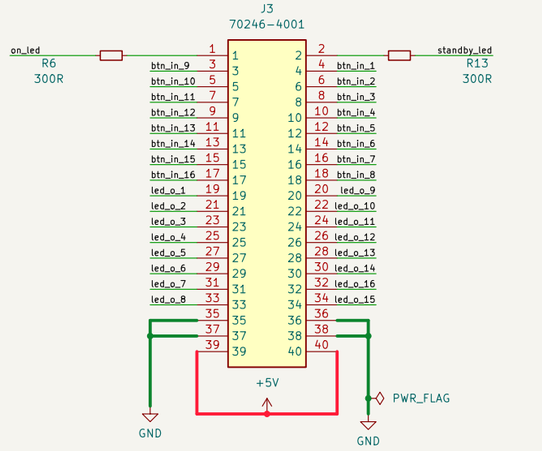

External 5 Volts supply




Connector used for supplying 5 volts to Standby/on Led indicator return on ground pin

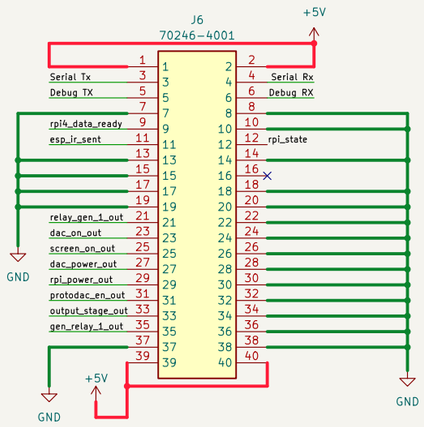


40 Pin connector for External relay signals and serial ports and Serial communications and GPIO breakout

Button LED Control


Led Driver for driving upto sixteen blue Leds , use Resistor r-ext to set brightness

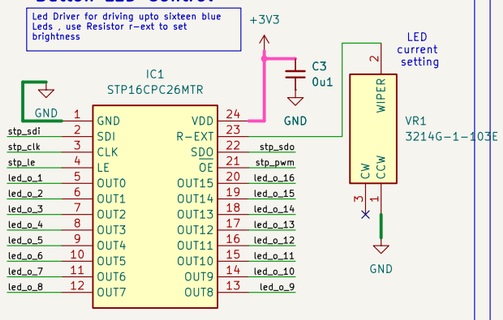


Power Supply

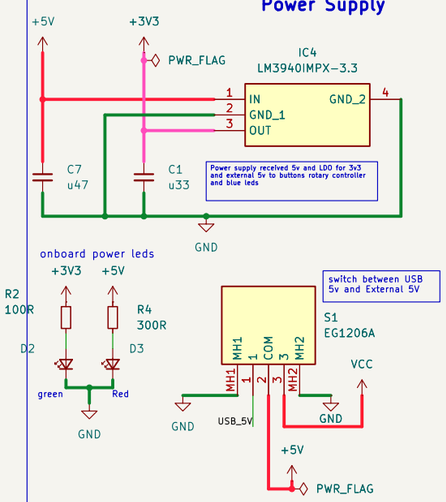



ESP 32 S3 MCU to Control operation of RPI, Power supplies,and other Services and sensors

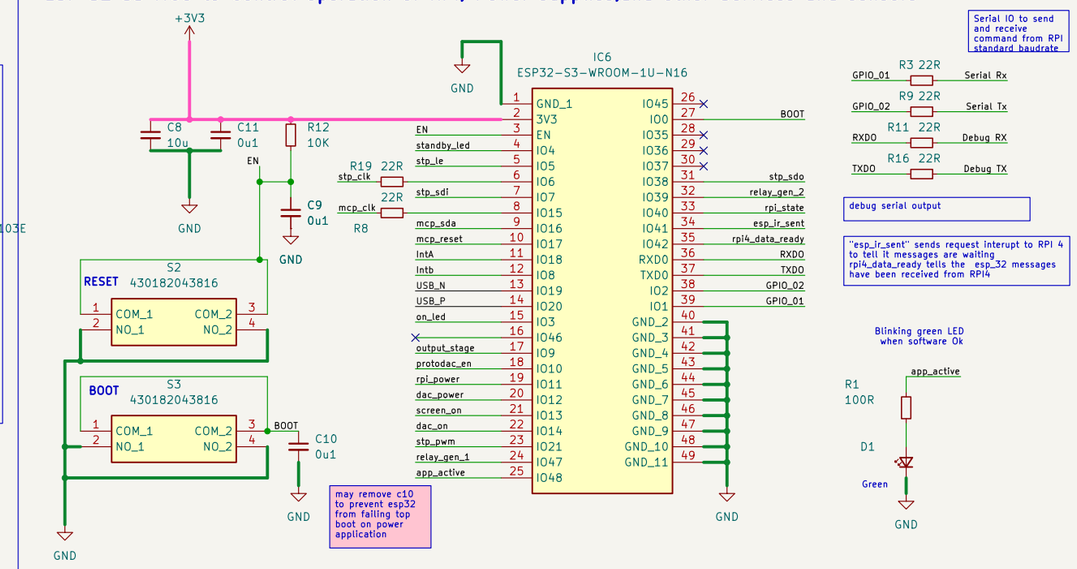

Mounting Holes



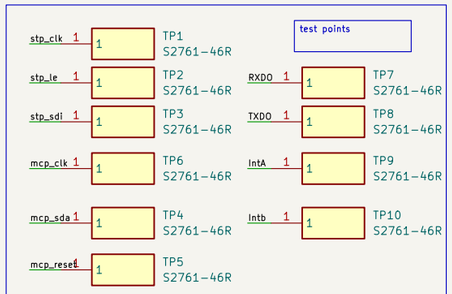

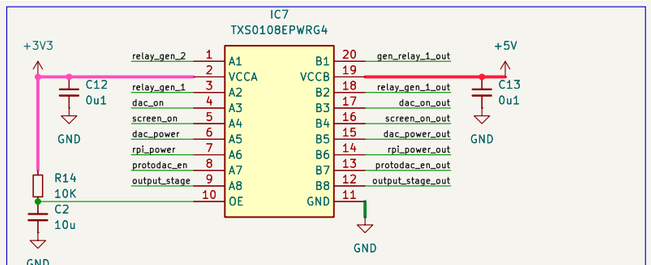

Relays for remove control for power to Dacs and other external boards

Sheet: /
File: tinyControlBoard.kicad_sch

Title:

Size: A3 | Date: 2024-08-08 | **Rev:**
KiCad E.D.A. 10.0.6 | Id: 1/1