

## 1. Description


### 1.1. Project

Project Name	ESCCODE_30102020
Board Name	custom
Generated with:	STM32CubeMX 5.4.0
Date	01/09/2021

### 1.2. MCU

MCU Series	STM32F0
MCU Line	STM32F0x0 Value Line
MCU name	STM32F030K6Tx
MCU Package	LQFP32
MCU Pin number	32

## 2. Pinout Configuration

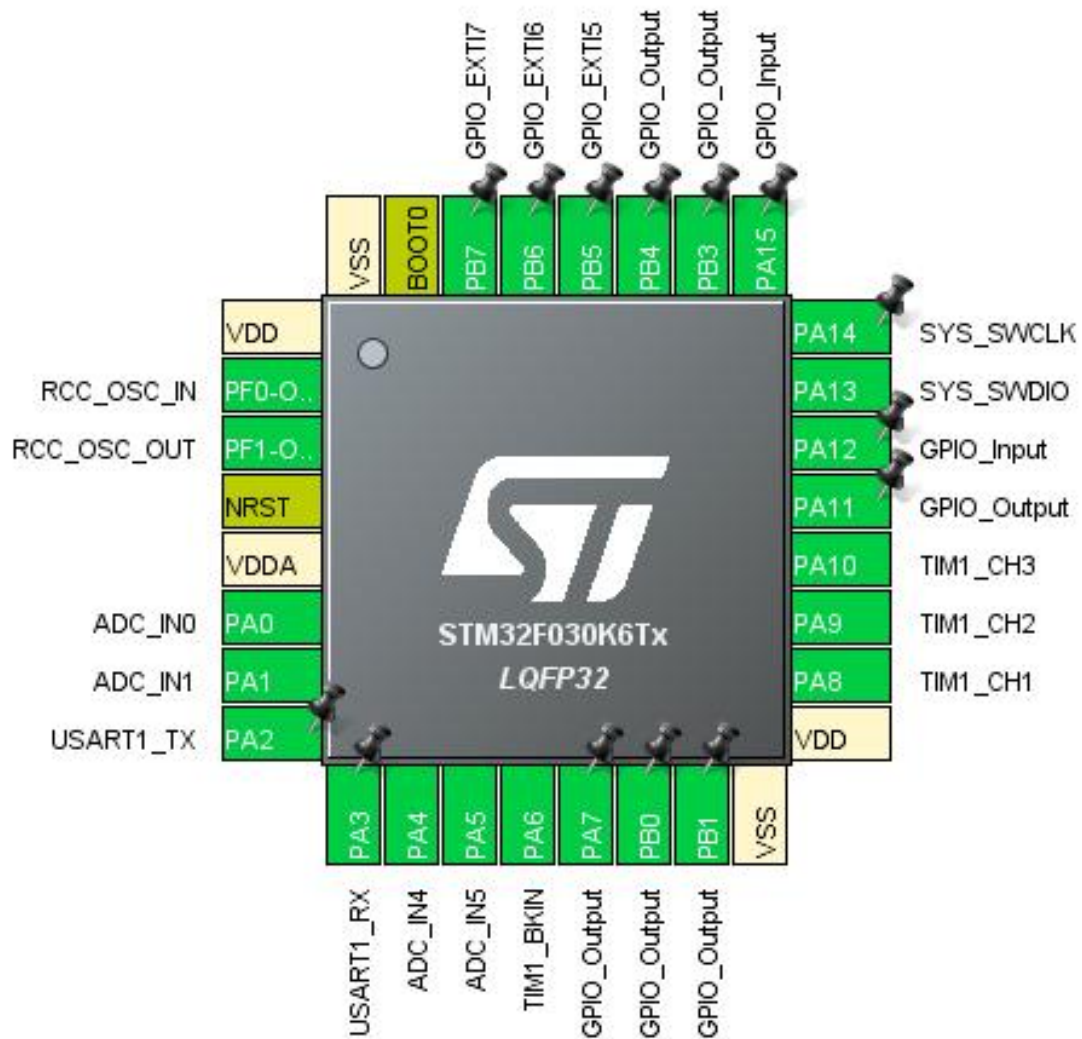


### 3. Pins Configuration

Pin Number LQFP32	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VDD	Power		
2	PF0-OSC_IN	I/O	RCC_OSC_IN	
3	PF1-OSC_OUT	I/O	RCC_OSC_OUT	
4	NRST	Reset		
5	VDDA	Power		
6	PA0	I/O	ADC_IN0	
7	PA1	I/O	ADC_IN1	
8	PA2	I/O	USART1_TX	
9	PA3	I/O	USART1_RX	
10	PA4	I/O	ADC_IN4	
11	PA5	I/O	ADC_IN5	
12	PA6	I/O	TIM1_BKIN	
13	PA7 *	I/O	GPIO_Output	
14	PB0 *	I/O	GPIO_Output	
15	PB1 *	I/O	GPIO_Output	
16	VSS	Power		
17	VDD	Power		
18	PA8	I/O	TIM1_CH1	
19	PA9	I/O	TIM1_CH2	
20	PA10	I/O	TIM1_CH3	
21	PA11 *	I/O	GPIO_Output	
22	PA12 *	I/O	GPIO_Input	
23	PA13	I/O	SYS_SWDIO	
24	PA14	I/O	SYS_SWCLK	
25	PA15 *	I/O	GPIO_Input	
26	PB3 *	I/O	GPIO_Output	
27	PB4 *	I/O	GPIO_Output	
28	PB5	I/O	GPIO_EXTI5	
29	PB6	I/O	GPIO_EXTI6	
30	PB7	I/O	GPIO_EXTI7	
31	BOOT0	Boot		
32	VSS	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

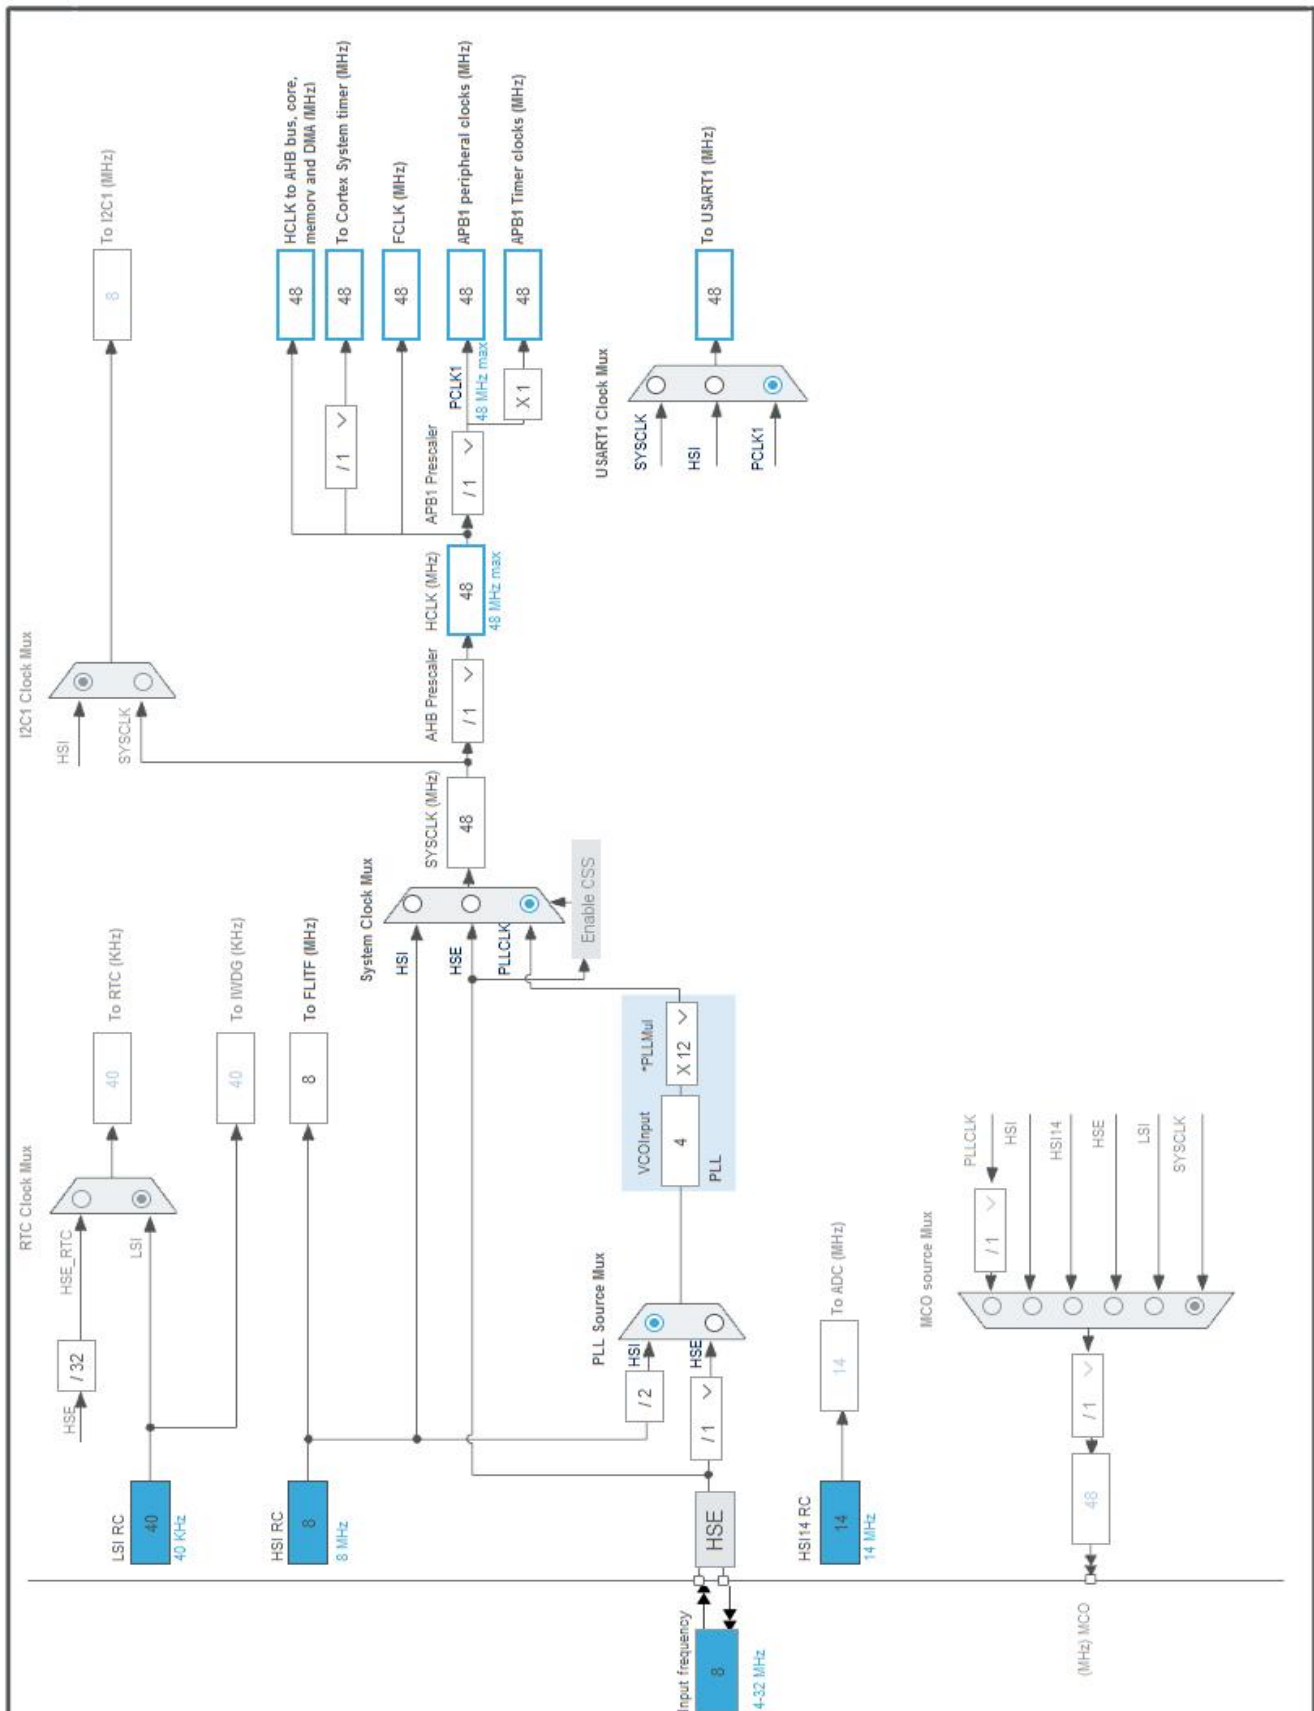

## 5. Software Project

### 5.1. Project Settings

Name	Value
Project Name	ESCCODE_30102020
Project Folder	D:\Desktop from D
Toolchain / IDE	MDK-ARM V5.27
Firmware Package Name and Version	STM32Cube FW_F0 V1.11.1

### 5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

## 6. Power Consumption Calculator report

### 6.1. Microcontroller Selection

Series	STM32F0
Line	STM32F0x0 Value Line
MCU	STM32F030K6Tx
Datasheet	024849_Rev2

### 6.2. Parameter Selection

Temperature	25
Vdd	3.6

## 7. IPs and Middleware Configuration

### 7.1. ADC

mode: IN0

mode: IN1

mode: IN4

mode: IN5

mode: Temperature Sensor Channel

mode: Vrefint Channel

#### 7.1.1. Parameter Settings:

##### ADC\_Settings:

Clock Prescaler	<b>Synchronous clock mode divided by 4 *</b>
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Scan Conversion Mode	Forward
Continuous Conversion Mode	<b>Enabled *</b>
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	<b>Enabled *</b>
End Of Conversion Selection	<b>End of sequence of conversion *</b>
Overrun behaviour	Overrun data preserved
Low Power Auto Wait	Disabled
Low Power Auto Power Off	Disabled

##### ADC\_Regular\_ConversionMode:

Sampling Time	<b>13.5 Cycles *</b>
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None

##### WatchDog:

Enable Analog WatchDog Mode	false
-----------------------------	-------

### 7.2. GPIO

### 7.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

#### 7.3.1. Parameter Settings:

**System Parameters:**

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	1 WS (2 CPU cycle)

**RCC Parameters:**

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

## 7.4. SYS

**mode: Debug Serial Wire**

**Timebase Source: SysTick**

## 7.5. TIM1

**Clock Source : Internal Clock**

**Channel1: PWM Generation CH1**

**Channel2: PWM Generation CH2**

**Channel3: PWM Generation CH3**

**mode: Activate-Break-Input**

### 7.5.1. Parameter Settings:

**Counter Settings:**

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>2880 *</b>
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	Disable

**Trigger Output (TRGO) Parameters:**

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

**Break And Dead Time management - BRK Configuration:**

BRK State	Enable
BRK Polarity	<b>Low *</b>

**Break And Dead Time management - Output Configuration:**

Automatic Output State	<b>Enable *</b>
------------------------	-----------------



Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

#### PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

#### PWM Generation Channel 2:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

#### PWM Generation Channel 3:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

## 7.6. TIM3

### mode: Clock Source

#### 7.6.1. Parameter Settings:

##### Counter Settings:

Prescaler (PSC - 16 bits value)	<b>48000 *</b>
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>100 *</b>
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

##### Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

## 7.7. USART1

**Mode: Asynchronous**

### 7.7.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	<b>115200 *</b>
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

#### Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

**\* User modified value**

## 8. System Configuration

### 8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC	PA0	ADC_IN0	Analog mode	No pull-up and no pull-down	n/a	
	PA1	ADC_IN1	Analog mode	No pull-up and no pull-down	n/a	
	PA4	ADC_IN4	Analog mode	No pull-up and no pull-down	n/a	
	PA5	ADC_IN5	Analog mode	No pull-up and no pull-down	n/a	
RCC	PF0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PF1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_SWDIO	n/a	n/a	n/a	
	PA14	SYS_SWCLK	n/a	n/a	n/a	
TIM1	PA6	TIM1_BKIN	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA8	TIM1_CH1	Alternate Function Push Pull	No pull-up and no pull-down	High *	
	PA9	TIM1_CH2	Alternate Function Push Pull	No pull-up and no pull-down	High *	
	PA10	TIM1_CH3	Alternate Function Push Pull	No pull-up and no pull-down	High *	
USART1	PA2	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	High *	
	PA3	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	High *	
GPIO	PA7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	High *	
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	High *	
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	High *	
	PA11	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA12	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	
	PA15	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	
	PB3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB5	GPIO_EXTI5	External Interrupt Mode with Rising/Falling edge	Pull-up *	n/a	
	PB6	GPIO_EXTI6	External Interrupt Mode with Rising/Falling edge	Pull-up *	n/a	
	PB7	GPIO_EXTI7	External Interrupt Mode with Rising/Falling edge	Pull-up *	n/a	



## 8.2. DMA configuration

DMA request	Stream	Direction	Priority
ADC	DMA1_Channel1	Peripheral To Memory	Low

### ADC: DMA1\_Channel1 DMA request Settings:

Mode: **Circular \***  
Peripheral Increment: Disable  
Memory Increment: **Enable \***  
Peripheral Data Width: Half Word  
Memory Data Width: Half Word

### 8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
EXTI line 4 to 15 interrupts	true	0	0
DMA1 channel 1 interrupt	true	0	0
TIM3 global interrupt	true	0	0
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC interrupt	unused		
TIM1 break, update, trigger and commutation interrupts	unused		
TIM1 capture compare interrupt	unused		
USART1 global interrupt	unused		

\* User modified value

## ***9. Software Pack Report***