



PROJECT OVERVIEW

# Power Glove Vision Project Overview

Architecture, controls, security, deployment, and project status.

2026 EDITION / IAIN BENNETT / MIT LICENSE

PowerGlove Vision lets you play RetroPie games by moving your hand in front of a camera connected to an Arduino UNO Q. Use your bare hand or a plain glove; there are no glove electronics to build. The UNO Q tracks your movements and sends controller input to a Raspberry Pi, where RetroArch sees a virtual gamepad named **PowerGlove Vision**.

The project includes eleven profiles: nine reusable Programs A-I and dedicated controls for Bad Street Brawler and Super Glove Ball. RetroPie can select a profile automatically when you launch a registered game. Glove Academy mode lets you practise without sending input to the cabinet.

The cabinet supports two Super Glove Ball paths. [lr-fceumm](#) is the complete, standard-joystick fallback and remains the safe default. The separately named [lr-nestopia-powerglove](#) core supplies native absolute X/Y coordinates; exact-ROM traces and deterministic headless tests confirm detection, Start, four-direction activation/release, small continuous movement, and safe neutralization. Native Z, roll, finger/action fields, and physical cabinet behavior are not yet complete.

## Choose a guide

### User manuals

| You want to...                                    | Read...                                |
|---------------------------------------------------|----------------------------------------|
| Install both devices and play your first game     | <a href="#">Installation Guide</a>     |
| Find a command or connection reminder             | <a href="#">Quick Reference</a>        |
| Learn a game's gestures and try a short challenge | <a href="#">Game and gesture guide</a> |
| Choose or experiment with Programs A-I            | <a href="#">Programs A-I manual</a>    |
| Recognize matrix animations and letters           | <a href="#">Matrix display guide</a>   |

### Technical documentation

| You want to...                                       | Read...                                                              |
|------------------------------------------------------|----------------------------------------------------------------------|
| Understand components and data flows                 | <a href="#">Architecture</a>                                         |
| Change settings or look up command flags             | <a href="#">Configuration Reference</a>                              |
| Review measured native and FCEUmm direction response | <a href="#">Direction-response benchmark</a>                         |
| Understand network and pairing boundaries            | <a href="#">Security policy</a>                                      |
| Change the project or its documentation              | <a href="#">Contributing guide</a>                                   |
| Check dependency provenance or release history       | <a href="#">Third-party components</a> and <a href="#">Changelog</a> |

## Quick start

Prepare your UNO Q with Arduino App Lab and use an existing RetroPie installation. Connect both to the same trusted network and attach the camera through a powered USB hub. Keep a physical controller available for RetroArch setup.

The commands in the Installation Guide select the latest published stable release. Use the same release on both devices. Download [install-uno-q.sh](#) and [install-retropie.sh](#) from that published [release](#). Run the first on the UNO Q and the second on RetroPie as your normal login user. Each verifies its package and requests sudo access when needed. The UNO installer includes the Arduino sketch, early-start helper, and shutdown helper; no separate App Lab import or helper installation is needed.

Follow the [Installation Guide](#) for copyable commands, pairing, calibration, and your first game. Both scripts also support `--check` and repeatable updates while preserving personal settings. The release-owned [config/profiles.json](#) baseline is backed up and replaced, while calibration and personal tuning under [data/](#) remain in place. Installer assets must be published before the release download commands become available.

The tested shared baseline includes responsive [0.28](#) activation and [0.14](#) release thresholds, full-camera-field native X/Y mapping with an 8% edge margin, and low-lag adaptive coordinate stabilization. These are suitable starting values for every installation. A neutral calibration is different: it records the palm center, apparent hand size, wrist angle, and resting jitter for one camera and playing position, so the installer never substitutes another person's recorded coordinates for yours.

When a registered Super Glove Ball ROM is present, the RetroPie installer offers to build the optional native core locally from pinned GPLv2 Nestopia source. If you decline, nothing changes and FCEUmm remains available. If you accept, both cores appear in RetroPie's per-ROM launch menu; FCEUmm stays selected until you choose the native entry. The project does not distribute ROMs or a compiled Nestopia core in its ordinary installation archive.

## Controls

Calibration records the resting hand position that the app treats as the centre of movement. Move away from that position to give a direction and return to it to release that direction. Recalibrate after moving the camera or changing your playing position. Direction activation and release are shared by all FCEUmm profiles and automatically rise above measured resting-hand jitter; you do not normally calibrate each direction. Some profiles replace ordinary hand movement with wrist steering or other controls, as shown below.

Calibration accepts 24 clear hand observations at 70% confidence or better. Holding the same neutral pose at the same distance should reproduce a very similar reference, but ordinary tracking variation means the saved numbers will not be identical. A completed calibration is saved atomically and reused across games and restarts; an incomplete attempt does not replace the previous file.

Across the profiles, hold a **V sign** steadily for about two-thirds of a second to send Start and a **thumbs-up with the other fingers closed** to send Select. These poses suppress A/B attacks; some profiles can still generate directional or auxiliary input, so keep your hand near its resting position while using them. Start sends only one press and must see a clearly non-V pose for 0.30 seconds before it can trigger again.

## Programs A-I

These reusable mappings produce ordinary NES controls. You do not need to launch Bad Street Brawler first. The table describes controller output; its effect depends on the game. A pulsed button repeatedly presses and releases.

| Program           | Movement                                                          | Actions and special gestures                                                                                             |
|-------------------|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| A - Pinball       | Ordinary movement is disabled.                                    | Index curl sends A; thumb curl sends Up; wrist roll sends B. Pulling back toggles combined flippers.                     |
| B - Joust         | Move your hand left or right.                                     | Index or middle curl pulses A; thumb curl holds B.                                                                       |
| C - Gyruess       | Roll your wrist left or right.                                    | A straight index finger holds A; pulling back sends B. Use the game's Attack Control B mode.                             |
| D - Challenge     | All four hand-movement directions are reversed.                   | Thumb curl sends A; index curl sends B.                                                                                  |
| E - Defender II   | Move your hand in four directions.                                | Thumb curl sends A; wrist roll sends B; ring-finger curl rapidly alternates left and right.                              |
| F - Sesame Street | Ordinary directional output is disabled.                          | Moving an open hand away from centre sends A; closing all fingers sends B.                                               |
| G - Gun Smoke     | Move your hand in four directions; wrist roll adds left or right. | Index curl sends A; pushing forward sends B. Combine them for A+B. Menu guard suppresses all ordinary controller output. |
| H - General       | Move your hand in four directions.                                | Index curl pulses A; thumb curl pulses B.                                                                                |
| I - Knight Rider  | Roll your wrist to steer; lower your hand to brake.               | Index curl sends Up for acceleration; pushing sends Up+A for turbo; thumb curl sends B.                                  |

Programs A, D, and H have no default ROM assignment. Choose one on Dashboard to try it, then register the exact game filename if you want automatic selection. The [Programs manual](#) includes illustrations; the [Game and gesture guide](#) adds objectives and tips.

## Bad Street Brawler

| Gesture                                 | Controller output                                |
|-----------------------------------------|--------------------------------------------------|
| Move your hand left, right, up, or down | Corresponding D-pad direction                    |
| Curl your thumb                         | Pulsed B                                         |
| Curl your middle finger                 | A+B                                              |
| Roll your wrist left or right           | A plus that direction                            |
| Push toward the camera                  | Glove Zap: short simultaneous Left + Right pulse |

Push toward the camera for Glove Zap, then return to your starting distance before trying again. Bad Street Brawler needs its game-specific emulator setting; see the [configuration reference](#).

## Super Glove Ball

| Gesture                                 | Controller output             |
|-----------------------------------------|-------------------------------|
| Move your hand left, right, up, or down | Corresponding D-pad direction |
| Curl your index finger                  | A                             |
| Curl your thumb                         | B                             |

The same responsive mapping remains the explicit FCEUmm fallback. Headless tests using the same exact ROM show that both paths visibly activate and release every direction by frame 3. Their semantics differ: FCEUmm supplies held digital directions, while the native core supplies an absolute target position. The native path has passed exact-ROM detection, Start, continuous X/Y, and safe neutralization tests. Z, roll, fingers, and untested buttons remain neutral; see the [native compatibility record](#).

The eight-ROM [input audit](#) confirms that the other listed games consume standard NES controller bits. They continue to use FCEUmm and the same global recognition settings.

## Use the web interface

| Page                                  | What it does                                                                                                                                            |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dashboard, <a href="#">/dashboard</a> | Shows the camera and generated inputs; selects the current profile and starts or stops delivery.                                                        |
| Glove Academy, <a href="#">/learn</a> | Provides sixteen mapping-independent practice lessons and guided gesture tuning, with game input paused.                                                |
| Help, <a href="#">/help</a>           | Opens the local manuals and PDFs; <b>This cabinet</b> shows current connection details.                                                                 |
| Setup, <a href="#">/setup</a>         | Saves connection, camera, and startup settings; the Games section edits RetroPie mappings with backup and restore. Pairing requires HTTPS on port 8443. |

With **Gestures off** selected, the camera stays closed. Choose an active profile or open Glove Academy to begin. Wait for the camera view before practicing or playing; starting immediately after a reboot can take longer.

The live camera is diagnostic rather than part of controller output. Preview drawing, landmark detail, and JPEG encoding occur only while a browser is watching the stream and are capped at 5 fps. Close Dashboard or Glove Academy while playing to reserve all avoidable work for recognition; tracking and controller delivery continue normally.

**Stop controller** pauses delivery while leaving active tracking available. **Gestures off** closes the camera. **Shutdown** requests a Linux halt, but the tested UNO Q restarts afterward. A disappearing website is not proof that it is safe to remove power. See the installation guide before using Shutdown.



# I love the Power Glove. It's so bad.

Live vision, gesture and controller diagnostics from your camera-only Power Glove.



**SYSTEM**  
**Gestures idle**

**ACTIVE PROFILE**  
**Gestures off**  
STARTUP

**GAME**  
**Startup default**

**HAND TRACKING**  
**Paused**

**RETROPIE RECEIVER**  
**Stopped**

**POWER GLOVE VISION — Gestures are paused.**  
**Select a profile to resume.**

**Controller output**  
DIRECTIONS  
UP DOWN LEFT RIGHT  
BUTTONS  
A B START SELECT  
**Finger curl**  
THUMB: 0  
INDEX: 0  
MIDDLE: 0  
RING: 0  
PINKY: 0

**Axes**  
X: 0  
Y: 0  
Z: 0  
ROLL: 0  
**Recent events**  
Waiting for tracker...

Calibrate


Start controller

Connection

Shutdown

Dashboard showing the selected profile and controller readings


The screenshots below show the current interface. Camera imagery is blurred for privacy.

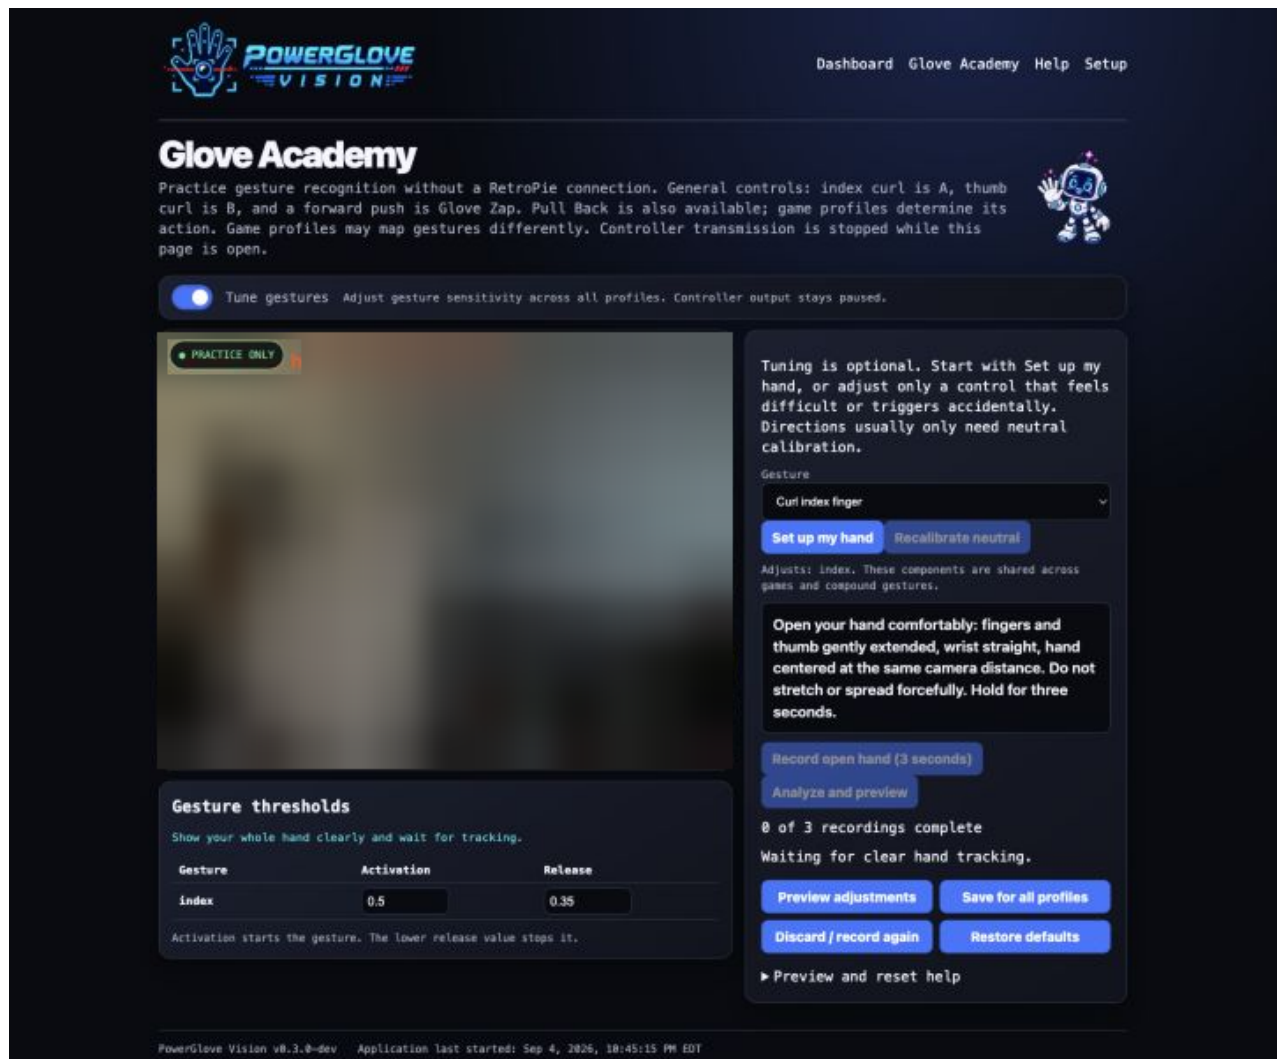

*Glove Academy in Tune mode, with thresholds below the blurred camera*

In **Glove Academy**, switch on **Tune gestures** to adjust sensitivity. The UNO Q shows a scanning **T** during tuning and a matching scanning **L** during ordinary practice. Both modes pause game input.

Tuning uses three recordings of three seconds each: open hand, gesture, open hand. Optional **Set up my hand** uses open hand, gentle fist with the thumb outside, open hand to measure all five fingers. Preview before saving. Saved Activation and Release thresholds apply in gameplay across profiles. **Glove Zap** and **Pull Back** have separate practice lessons and tuning controls; movement tuning ends by returning to the starting position and camera distance.

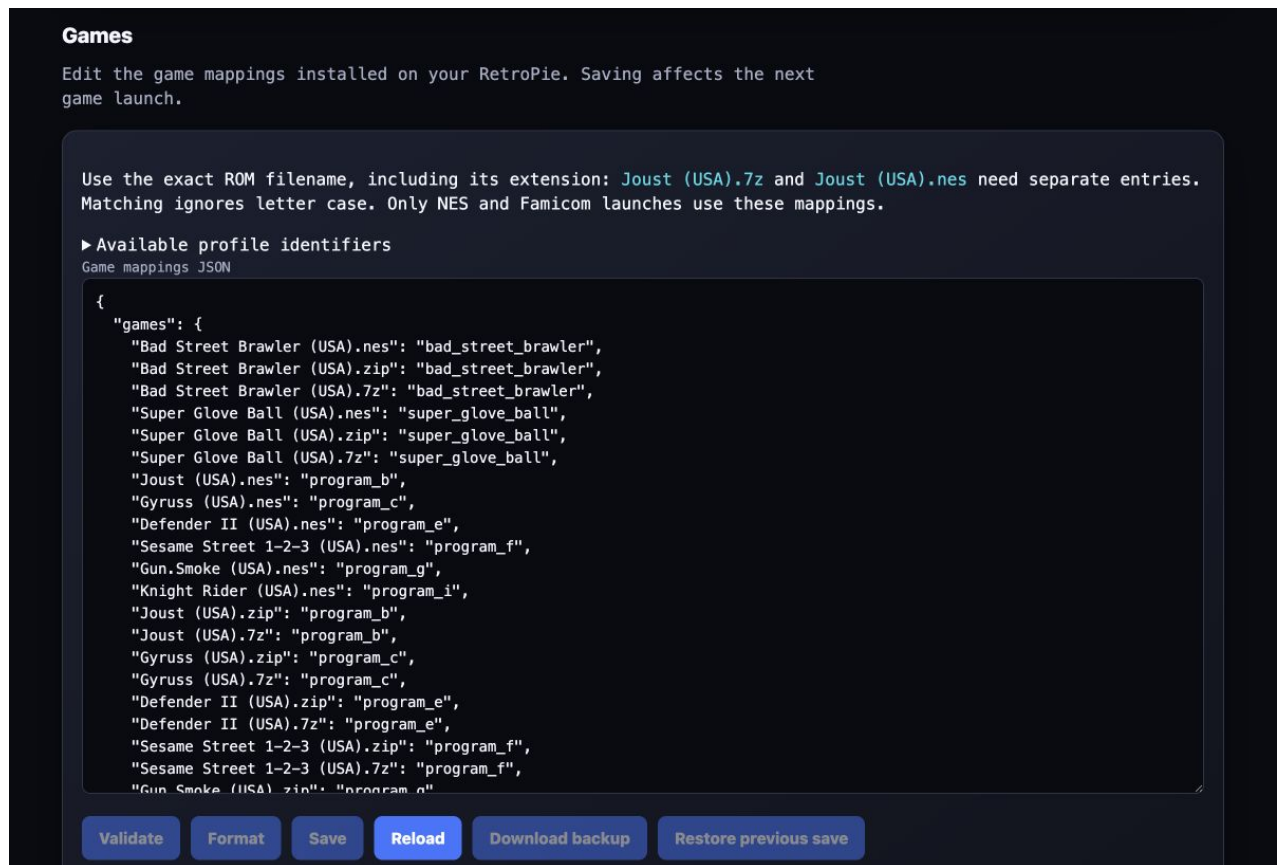

*Games editor in the lower part of Setup*

Scroll down **Setup** to **Games** to map exact ROM filenames to profiles. Saving affects the next game launch, not the game already running.

## Maintain or extend the project

Use the [Installation Guide's maintenance section](#) for updates, and the [Configuration Reference](#) for settings and all command options. The [Contributing guide](#) covers tests, documentation, package verification, and releases. Printable editions are stored in [output/pdf/](#).

PowerGlove Vision is an independent project licensed under the [MIT License](#). The modified Nestopia core is GPLv2 software and is documented separately from the MIT application; see its [distribution and license record](#). Nintendo, NES, Power Glove, and the named games belong to their respective owners. Third-party software and models retain their own terms, documented in [Third-party components](#).