
ECEN 4/5632 Theory and Application of Digital Filters

Lecture 21, 10-29-26

Peter Mathys*

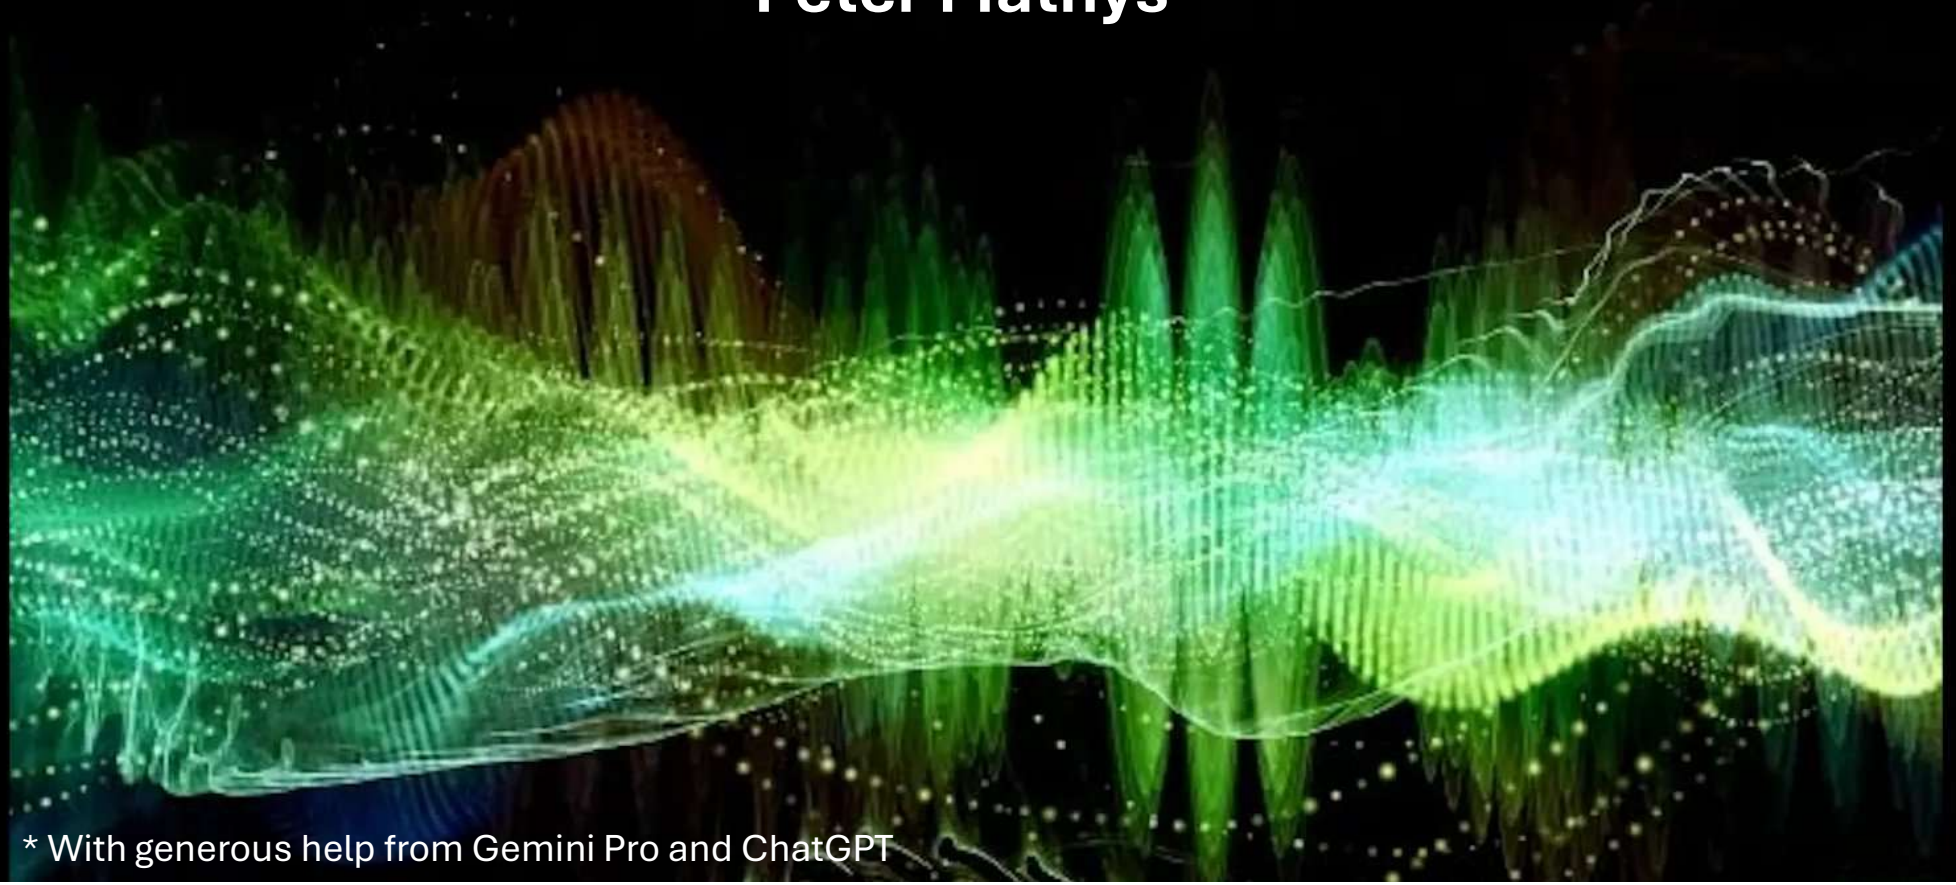

* With generous help from Gemini Pro and ChatGPT

Midterm Exam 2

Thursday November 5, 9:30 – 10:45 am, ECCR 131 for in-class students.
Between Nov. 5 and Nov. 11 for on-line students who must supply email address of exam proctor.
On-line students are welcome to take the exam in-class on Nov. 5, 9:30 – 10:45 am.

Covers (mostly) Lectures 7 through 14 and Problem Sets 5 through 9.
Topics: FIR, IIR filters, windowing, bilinear transformation, time/frequency responses, (generalized) linear phase, group delay, ML intersections (conv1d), DFT/FFT, fast convolution, STFT, spectrograms, downsampling, decimation, CNN strides, upsampling, interpolation, rational rate changes.
Exam problems will be similar to Problem Set questions.

Closed book, notes, no cheat sheets. Reference formulas will be printed on exam.
No laptops, tablets, phones, basic (non-programmable) scientific calculator o.k.

WEEK 11 ● LECTURE 21

Polyphase Decomposition and Efficient Decimation

Reorganize the same FIR computation so we never calculate samples that will be discarded

$$H(z) = \Sigma\, z^{-k}\, E_k(z^M)$$

$\downarrow M$ + polyphase = low-rate arithmetic

Oppenheim & Schafer §4.7–4.8 | Raschka: convolutional architectures / efficient ML

Roadmap and learning objectives

75 minutes • decomposition → Noble identity → efficient decimator → ML structured parallelism

- Decompose an FIR impulse response into M polyphase subsequences.
- Explain exactly where the M-fold decimation savings comes from.
- Use the first Noble Identity correctly—and know when it does not apply.
- Distinguish polyphase time-phase partitioning from grouped/channel convolution in ML.

0–20 min

Polyphase concept and index bookkeeping

20–55 min

Naive vs efficient decimation + Noble identity

55–75 min

Grouped convolutions / edge efficiency

01

The polyphase concept

Partition FIR taps by their index modulo M. Nothing is approximated; this is an exact algebraic rearrangement.

Start with one ordinary FIR filter

For h[n], separate taps whose indices have the same remainder modulo M.

$$e_k[r] = h[rM + k], \quad k = 0,1,\ldots,M-1$$

$$E_k(z) = \Sigma_r \, e_k[r] \, z^{-r}$$

next step: $H(z) = \sum_k E_k(z^M) z^{-k}$ ⇔ $h[n]$

Interpretation

Phase k contains the FIR taps at indices k, k+M, k+2M, ...


Why this helps

The same phase structure lines up naturally with keeping every Mth output sample.

$h[n] = \{1, 2, 3, 4, 5, 6, 7, 8\}$

n 0 1 2 3 4 5 6 7

M=3 example

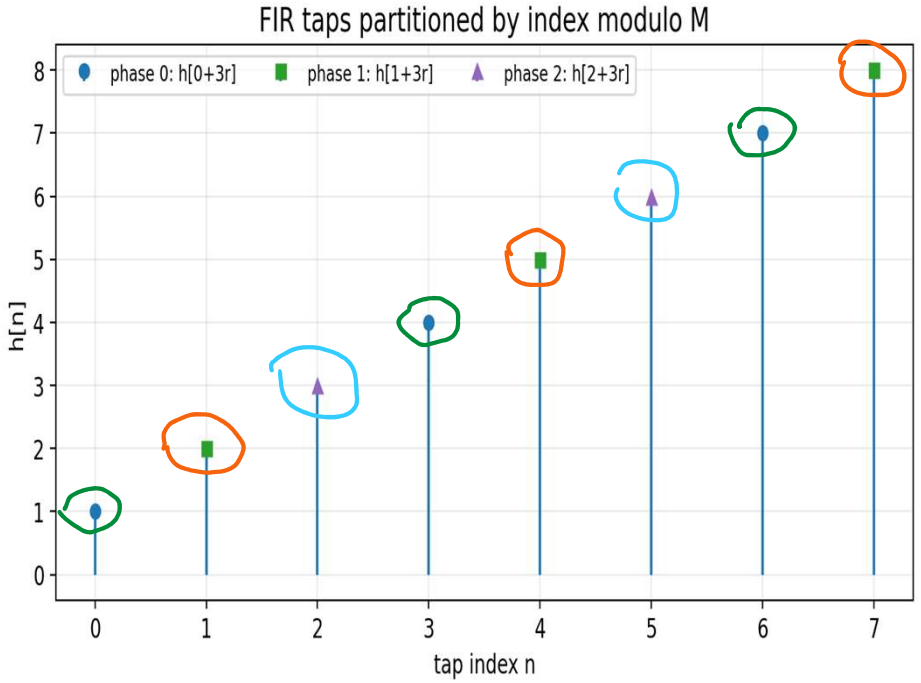


phase 0 of $h[n]$ $n = kM$

phase 1 of $h[n]$ $n = kM+1$

phase 2 of $h[n]$ $n = kM+2$

Decomposition of h[n]

Example for M=3

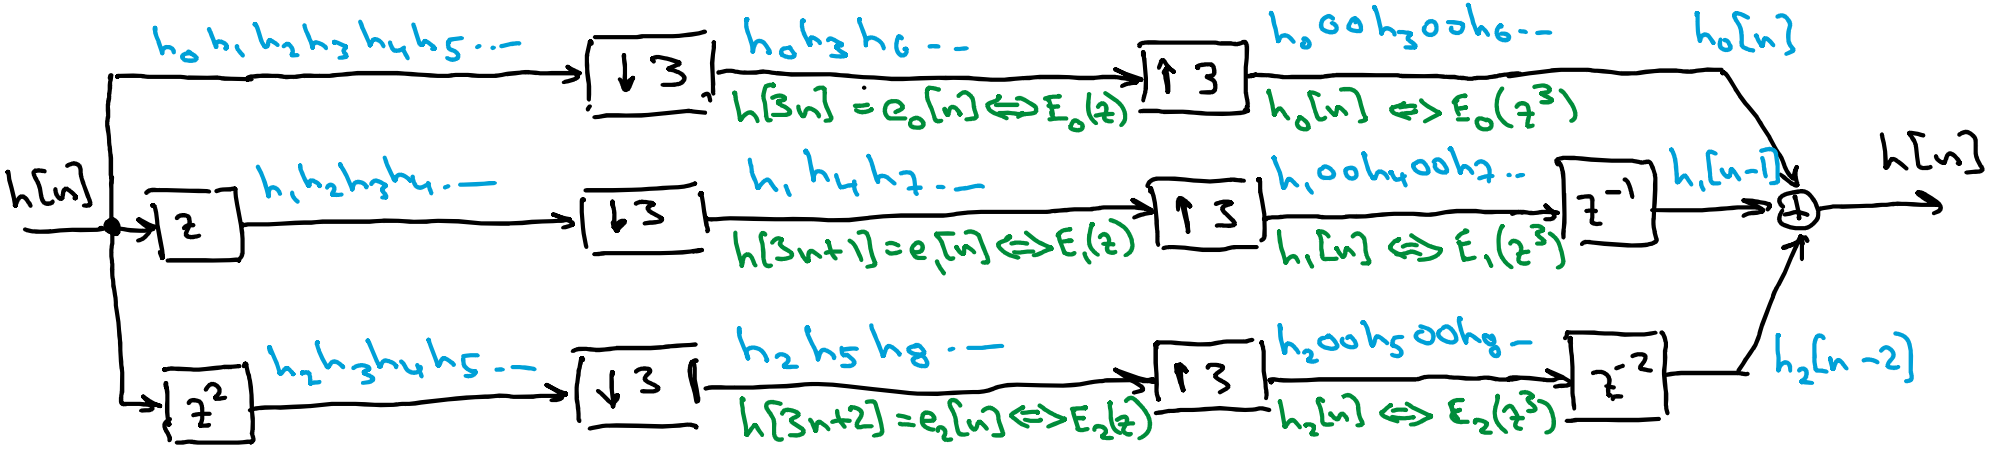

$$e_k[n] = h[Mn+k] \quad k = 0, 1, \ldots, M-1 \quad \Leftrightarrow \quad E_k(z) = \sum_n e_k[n] z^{-n}$$

after upsampling $h_k[n] \Leftrightarrow E_k(z^M)$

Key equation


$$h[n] = \sum_{k=0}^{M-1} h_k[n-k]$$

$$\Updownarrow$$

$$H(z) = \sum_{k=0}^{M-1} E_k(z^M) \cdot z^{-k}$$

Decomposition of $h[n]$

Example for $M=3$

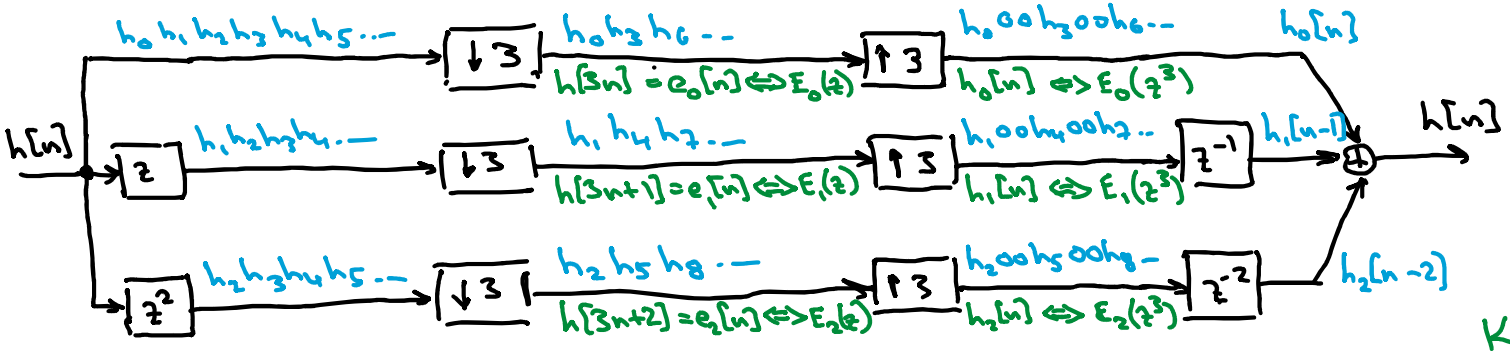

$$e_k[n] = h[Mn+k] \quad k = 0, 1, \ldots, M-1 \quad \Leftrightarrow \quad E_k(z) = \sum_n e_k[n] z^{-n}$$

after upsampling $h_k[n] \Leftrightarrow E_k(z^M)$

$$Y(z) = X(z) \cdot H(z) = \sum_{k=0}^{M-1} X(z) z^{-k} E_k(z^M)$$

Key equation

$$h[n] = \sum_{k=0}^{M-1} h_k[n-k]$$


$$\Updownarrow$$

$$H(z) = \sum_{k=0}^{M-1} E_k(z^M) \cdot z^{-k}$$

Filtering with Polyphase Decomposition

$$H(z) = \sum_{k=0}^{M-1} E_k(z^M)\, z^{-k}$$


$$Y(z) = X(z) \cdot H(z) = \sum_{k=0}^{M-1} X(z)\, z^{-k}\, E_k(z^M)$$

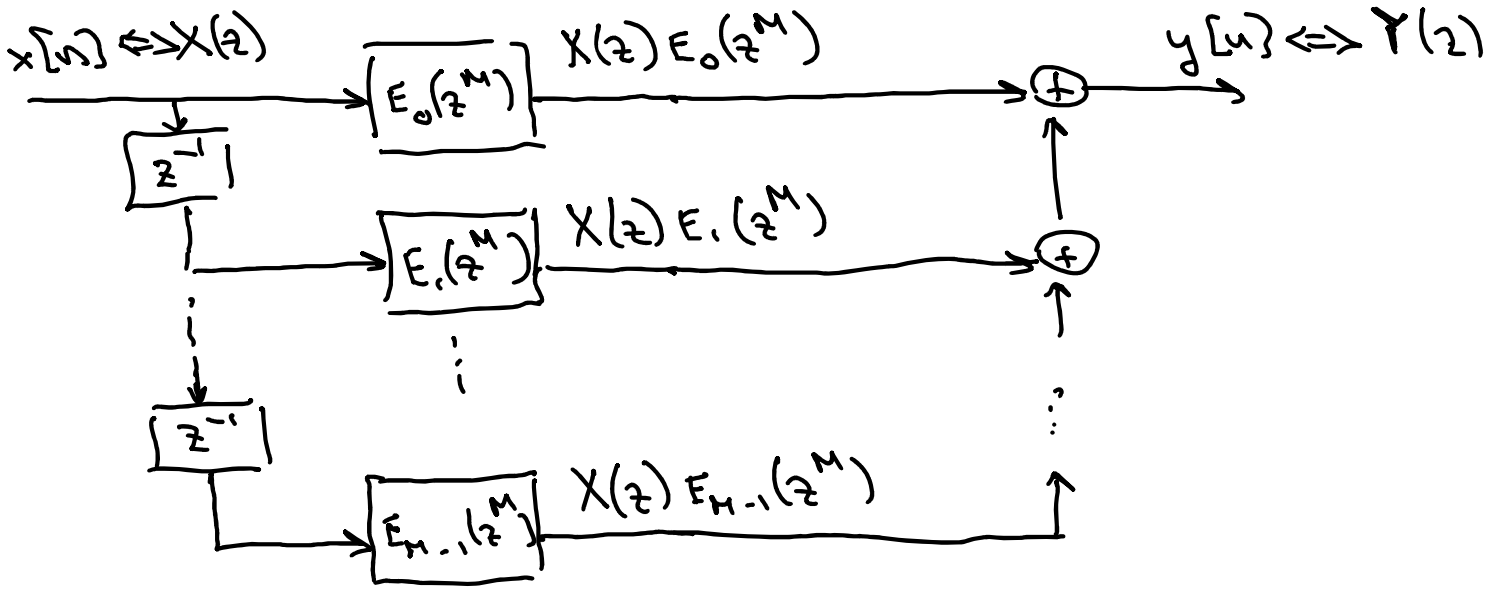

Filtering with Polyphase Decomposition

$$H(z) = \sum_{k=0}^{M-1} E_k(z^M)\, z^{-k}$$

$$Y(z) = X(z) \cdot H(z) = \sum_{k=0}^{M-1} X(z)\, z^{-k}\, E_k(z^M)$$

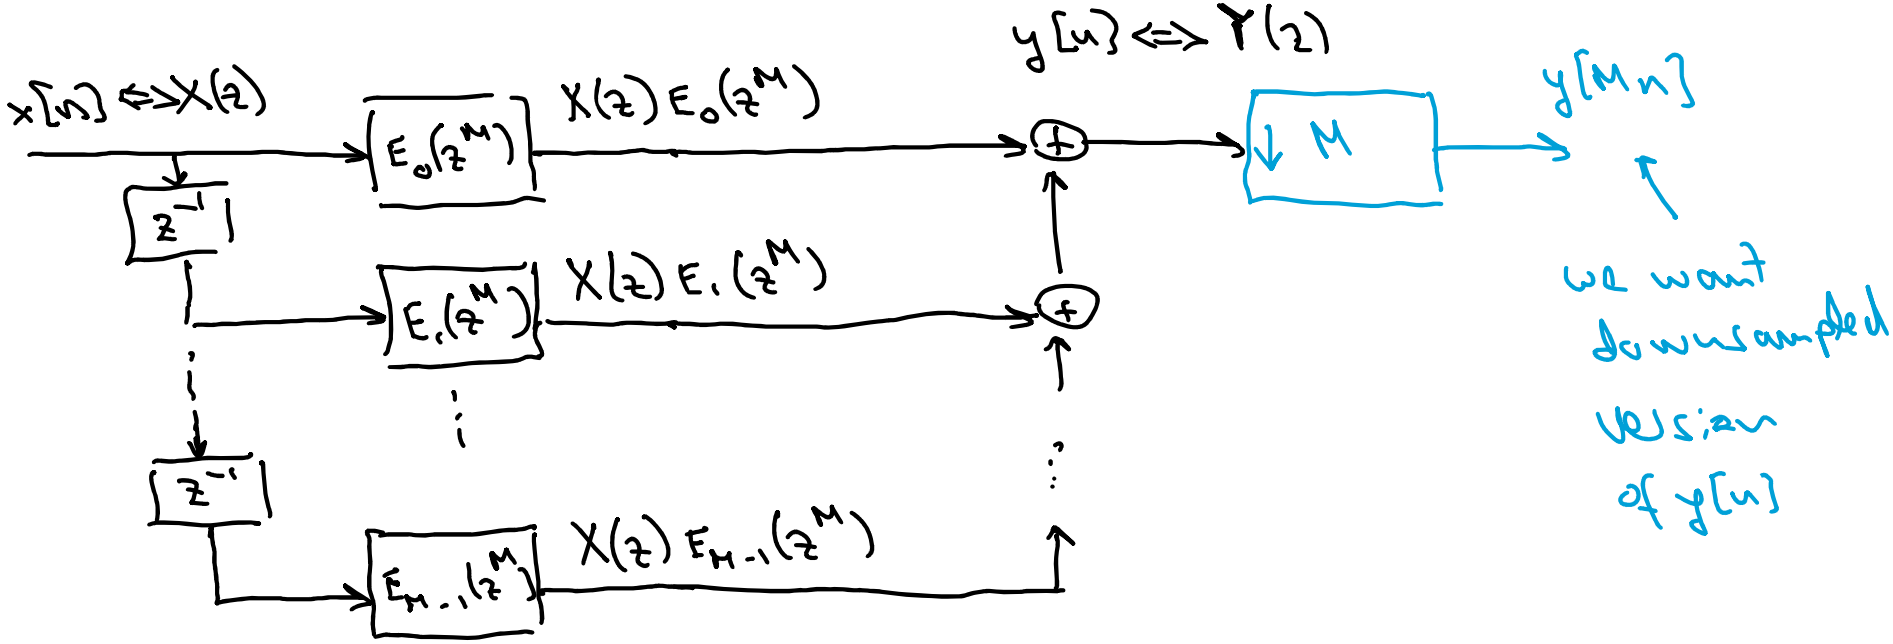


Filtering with Polyphase Decomposition

$$H(z) = \sum_{k=0}^{M-1} E_k(z^M)\, z^{-k}$$

$$Y(z) = X(z) \cdot H(z) = \sum_{k=0}^{M-1} X(z)\, z^{-k}\, E_k(z^M)$$

downsampled $y[n]$

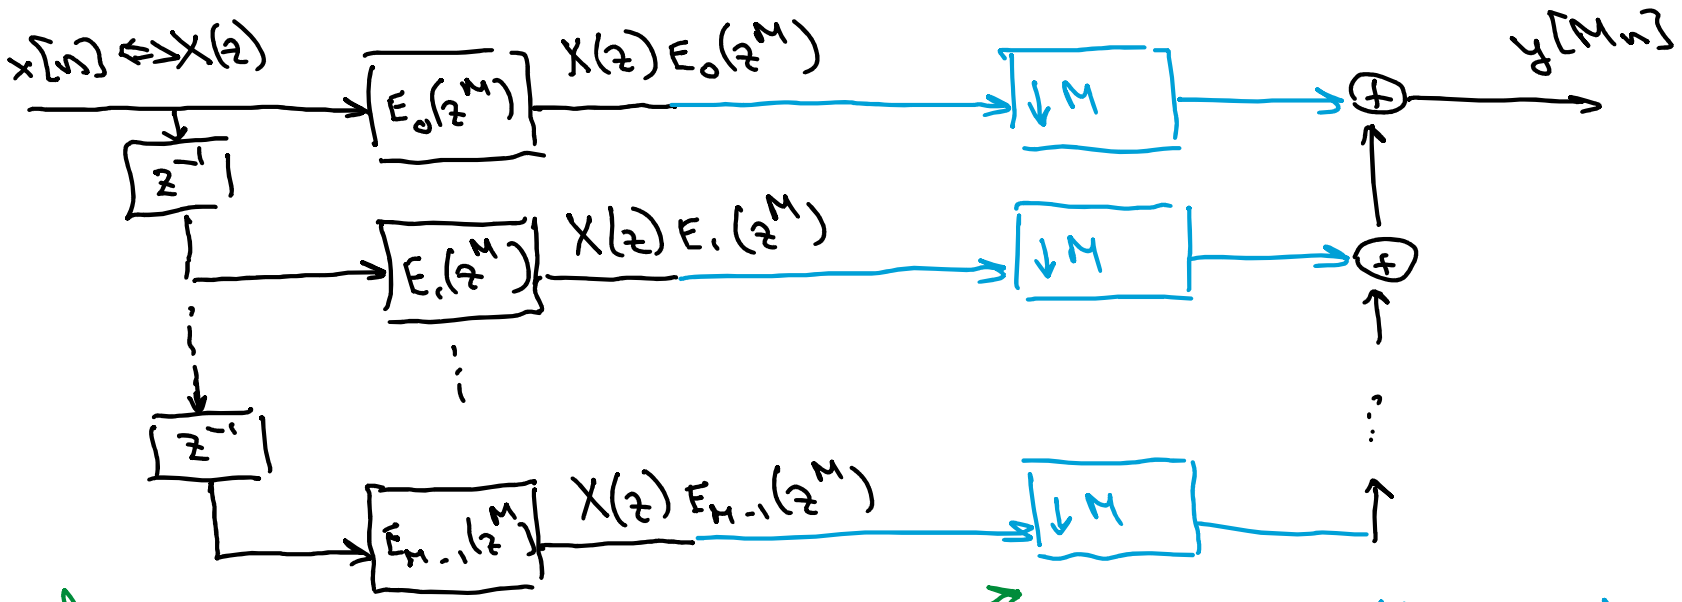

To develop:

⇒ Noble identity

interchange these blocks

downsampling and addition commute

Polyphase decomposition in the z-domain

Collect the M residue classes of tap indices.

$$H(z) = \sum_{k=0}^{M-1} E_k(z^M) z^{-k}$$

$$H(z) = E_0(z^M) + z^{-1}E_1(z^M) + \ldots + z^{-(M-1)}E_{M-1}(z^M)$$

$$H(z) = \Sigma_{k=0}^{M-1} z^{-k} E_k(z^M)$$

- Each E_k operates on every Mth FIR coefficient.
- The delays z^{-k} restore the original tap offsets when branches are recombined.
- No coefficients are changed and no output samples are changed.

Memory aid

Polyphase = "group coefficients by n mod M, then express the slow-time branch with z^M."

CONCEPT CHECK

For M = 4, which FIR taps belong to phase E_2?

$h[nM+k]$ $h[4n+2]$ taps 2, 6, 10, 14, ...

CONCEPT CHECK

For M = 4, which FIR taps belong to phase E_2?

Good answer

Tap indices n = 2, 6, 10, 14, … because they satisfy n = 4r + 2. Equivalently, $e_2[r] = h[4r+2]$.

02

Efficient decimation and Noble identities


Move computation to the slow side of the rate changer—but only when the structure permits it.

The naive decimator wastes most FIR outputs

Filter at F_s, then ↓M keeps only v[0], v[M], v[2M], ...


Filter first

Then downscale

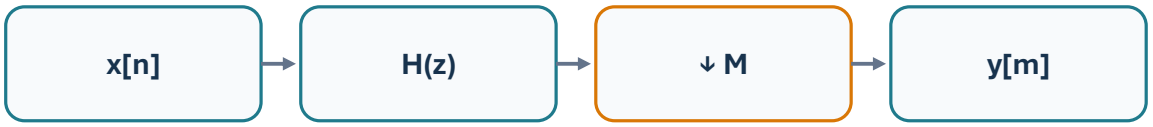

$$v[n] = \Sigma_k\, h[k]x[n-k] \quad \rightarrow \quad y[m] = v[mM]$$

M = 4 example

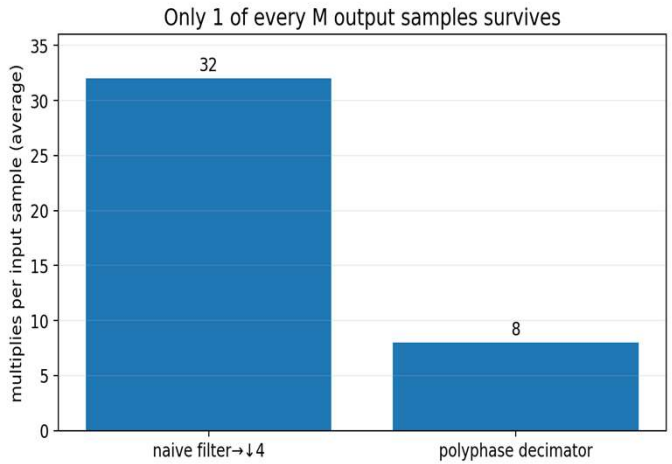

Savings by ≈M factor


Cost intuition

An N-tap FIR evaluates about N multiplies for every input sample, even though only 1/M of the outputs remain.

Target

Keep exactly the same y[m], but evaluate only the convolution sums associated with n = mM.

Noble Identity for Downsampling

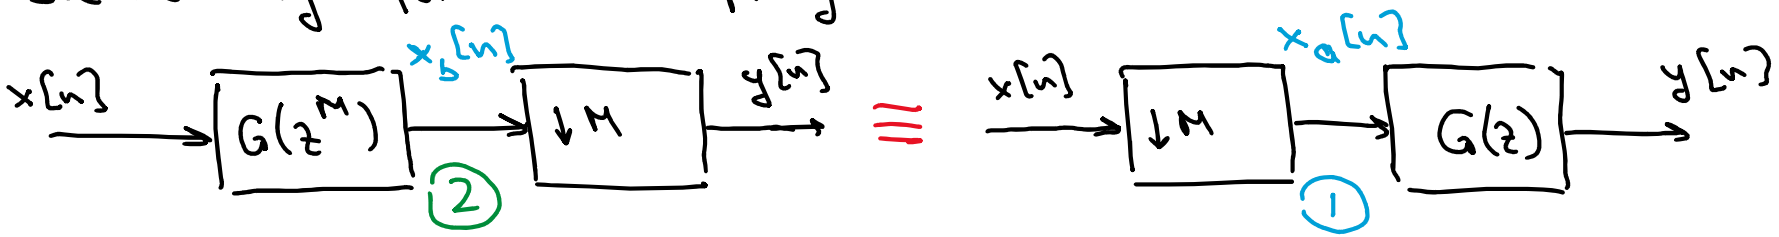

$$X_a(e^{j\omega}) = \frac{1}{M}\sum_{i=0}^{M-1} X(e^{j((\omega-2\pi i)/M})$$

$$Y(e^{j\omega}) = \frac{1}{M}\sum_{i=0}^{M-1} X(e^{j((\omega-2\pi i)/M}) \cdot G(e^{j\omega})$$

identical expressions

⇒ Noble identity for downsampling

$$X_b(e^{j\omega}) = X(e^{j\omega}) \cdot G(e^{jM\omega})$$

$$Y(e^{j\omega}) = \underbrace{\frac{1}{M}\sum_{i=0}^{M-1} X(e^{j((\omega-2\pi i)/M})}_{= X_a(e^{j\omega})} \cdot \underbrace{G(e^{j(\omega-2\pi i)})}_{= G(e^{j\omega})}$$


DTFT periodic in ω period 2π

Filtering with Polyphase Decomposition

$$H(z) = \sum_{k=0}^{M-1} E_k(z^M)\, z^{-k}$$

$$Y(z) = X(z) \cdot H(z) = \sum_{k=0}^{M-1} X(z)\, z^{-k}\, E_k(z^M)$$

downsampled $y[n]$

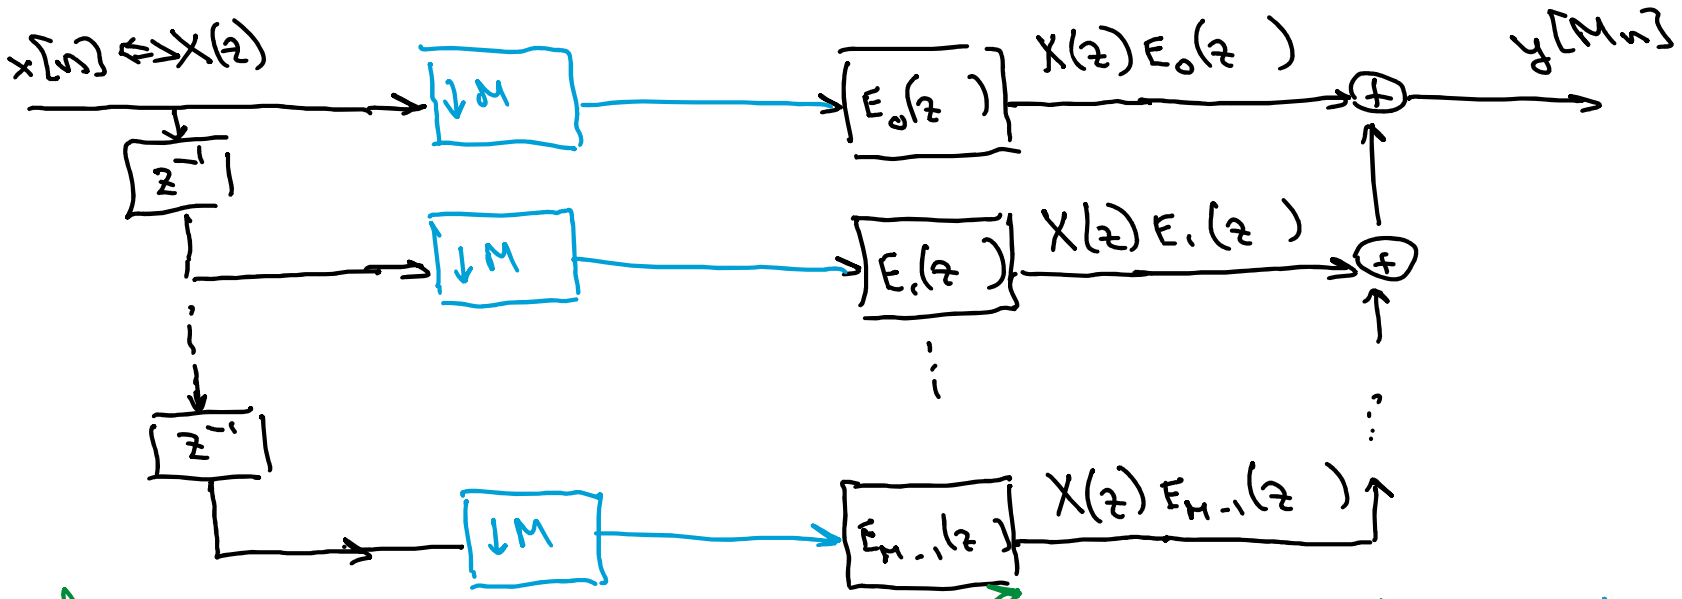

To develop:


⇒ Noble identity

Blocks are now interchanged using Noble identity

downsampling and addition commute

First Noble Identity: the precise statement

A rate changer commutes with a filter only after the filter has the required z^M structure.

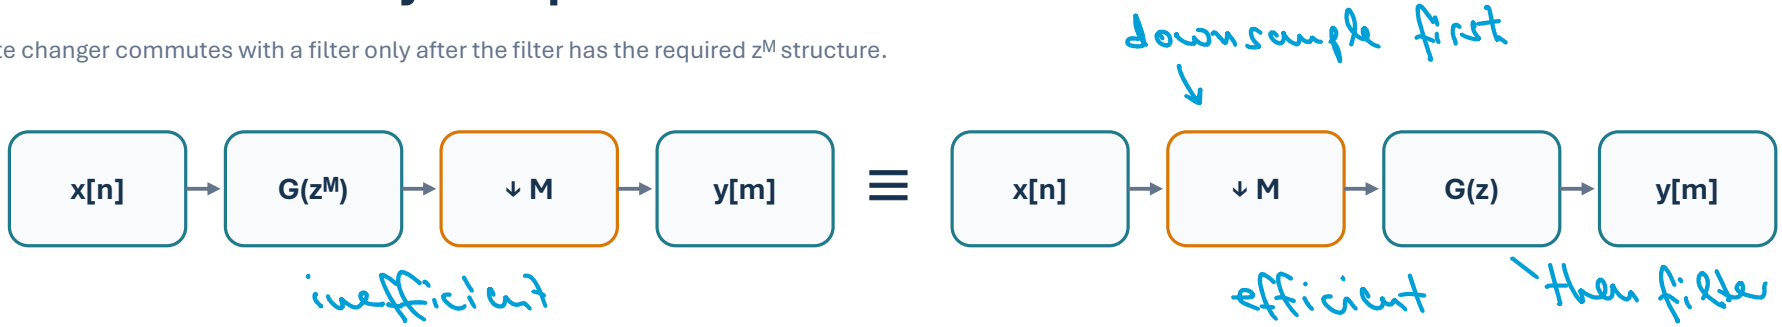

What changes

On the right, G(z) runs at the lower sampling rate F_s/M.

What does NOT work

You cannot commute ↓M through an arbitrary G(z) and expect the same system.

$$G(z^M) \rightarrow \downarrow M \equiv \downarrow M \rightarrow G(z)$$


Why polyphase matters

Every branch in $H(z)=\sum z^{-k}E_k(z^M)$ contains exactly the form needed by the Noble Identity.

Efficient polyphase decimator

Decompose H(z), then move each E_k through the downsampler so it runs at the output rate.

$$y[m] = \Sigma_k \Sigma_r e_k[r] \cdot x[(m-r)M - k]$$

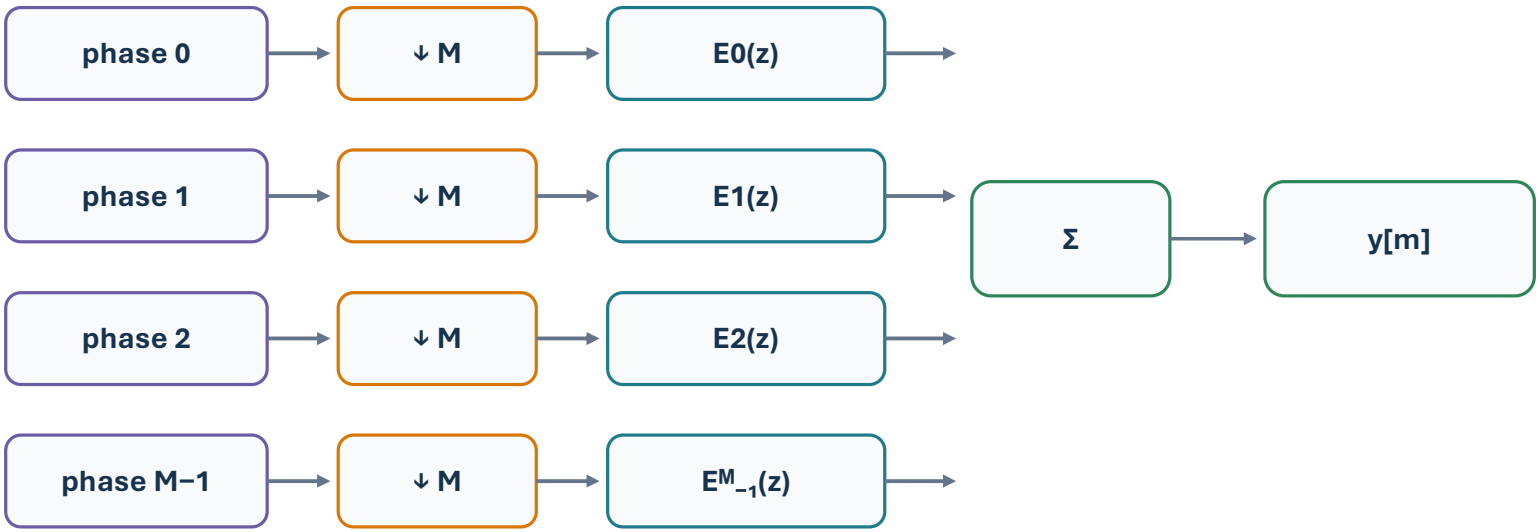

Key result


All E_k filters execute at F_s/M, not F_s.


Same math

Branches are phase-selective views of the same original convolution.

Where the M-fold savings comes from

The number of multiplies per retained output is not smaller; the number of unnecessary outputs is.

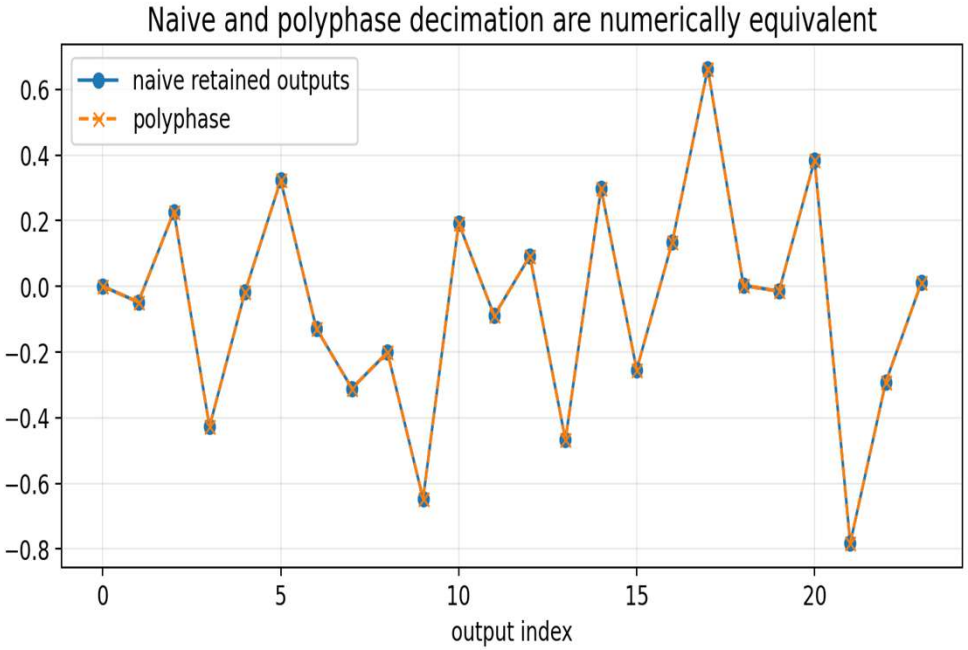

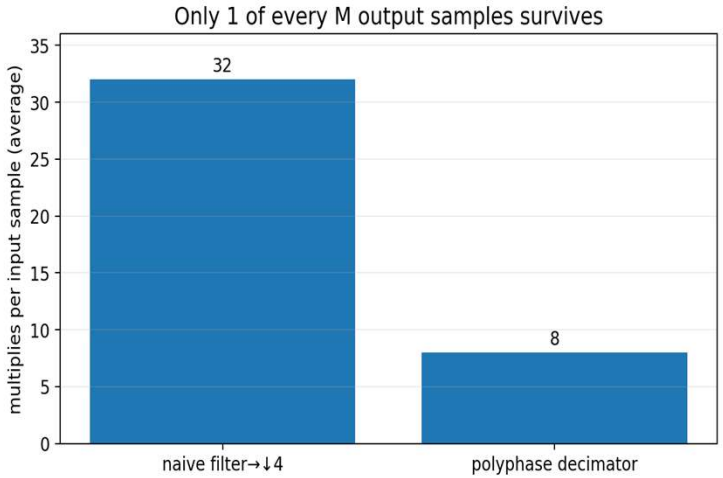

naive $\approx N \cdot F_s$ mult/s

polyphase $\approx (N/M) \cdot F_s$ mult/s

Ratio

Ideal arithmetic saving ≈ M for long FIRs and steady-state streaming.

CONCEPT CHECK

An N = 48 tap FIR decimator reduces the rate by M = 6. Roughly how many FIR multiplications per input sample are needed after polyphase reorganization?

need $\approx \frac{48}{6} = 8$

CONCEPT CHECK

An N = 48 tap FIR decimator reduces the rate by M = 6. Roughly how many FIR multiplications per input sample are needed after polyphase reorganization?

Good answer

About N/M = 8 multiplications per input sample on average, versus about 48 for filtering every full-rate output first.

03

ML context: grouped convolutions

Both ideas partition a large computation into structured independent branches—but along different axes.

Grouped Conv1d: channel partitioning

PyTorch groups restrict which input channels can contribute to which output channels.

$$\mathrm{Conv1d}(C_{in}, C_{out}, \mathrm{kernel_size}=K, \mathrm{groups}=G)$$

Standard convolution

Every output channel can mix all input channels.

Grouped convolution

Channels are split into G independent convolution groups.

Depthwise convolution

$G = C_{in}$: each channel is filtered independently before later mixing.

- Fewer cross-channel connections → fewer parameters and MACs.
- A following 1×1 / pointwise convolution can restore channel mixing.
- This structured factorization is a common edge-deployment idea.

Polyphase versus grouped convolution

Useful analogy: partition → parallel low-cost branches → recombine. Important difference: what is partitioned?

Polyphase DSP

Partitions sample/tap phases modulo M.

Goal: exact multirate equivalence while moving arithmetic to a lower sample rate.

Branches are determined by the rate-change factor.

Grouped CNN

Partitions feature channels.

Goal: constrain connectivity and reduce learnable computation.

Groups are an architectural choice and weights are learned.

shared principle: exploit structure instead of computing a dense operation

Coding demo: prove the equivalences

Use the notebook to compare outputs and perturbation paths.

- Decompose h[n] into $e_0,\ldots,e^M{}_{-1}$ and reconstruct it exactly.
- Compare filter→↓M with scipy.signal.upfirdn(..., down=M).
- Numerically verify the First Noble Identity for $G(z^M)$.
- Perturb one input channel of a grouped Conv1d and observe that only outputs in its group change.

Prediction first

Ask students which outputs should match before running each cell.

Debugging habit

If a Noble-identity test fails, check whether the filter actually has z^M spacing.

Notebook

Week7_Polyphase_DSP_ML_Demos.ipynb

Lecture 21 wrap-up

Polyphase does not change the filter—it changes where and when the arithmetic happens.

- $H(z)=\Sigma\, z^{-k}E_k(z^M)$ groups FIR taps by phase.
- A naive decimator computes outputs that $\downarrow M$ immediately discards.
- The First Noble Identity moves E_k filters to the low-rate side because they arise as $E_k(z^M)$.
- Ideal arithmetic savings are approximately M.
- Grouped convolution is a structural parallelism analogy, not the same decomposition.

EXIT QUESTION

Why is it incorrect to say “a downsampler can always be moved before a filter”?

Good answer

The Noble Identity only permits the move for the special $G(z^M)$ structure; arbitrary filters do not commute with $\downarrow M$.