

Industrial Motors

Commercial &
Appliance Motors

**Automation &
Systems**

Energy

Transmission &
Distribution

Coatings

CFW320 – Variable Speed Drive

**Compact size,
high performance,**
ideal for industrial
machines and
processes in general



Driving efficiency and sustainability





S U M M A R Y

Introduction

04

Flexibility

06

Connectivity

06

Applications

07

Easy to use

08

Main features

09

Coding

10

Specification

11

Accessories


13

Technical data

15

Block diagram

16

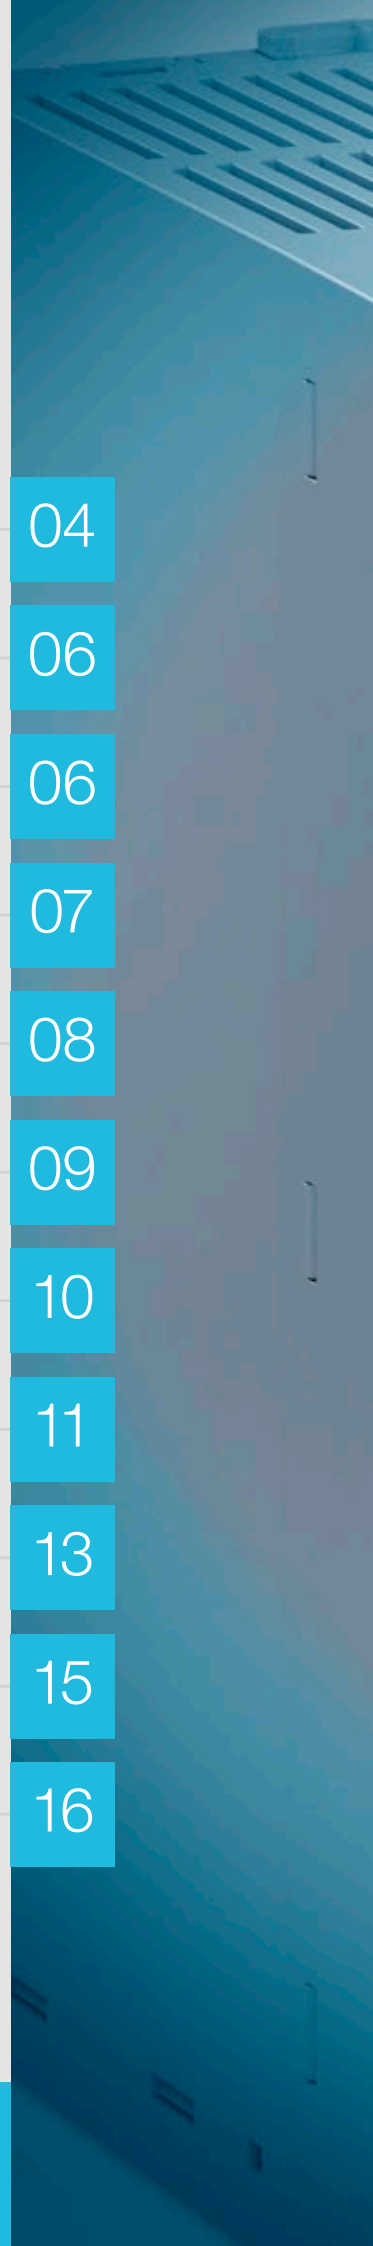



CFW320
VECTOR INVERTER



WARNING
ATTENTION
ATENÇÃO
警告

- REMOVE TERMINAL COVER ONLY 10 MIN. AFTER POWER HAS BEEN DISCONNECTED.
- READ THE INSTRUCTION MANUAL.
- ATTENDRE AU MOINS 10 MINUTES APRÈS AVOIR COUPÉ L'ALIMENTATION ÉLECTRIQUE AVANT D'OUVRIR LE BOÎTIER DU TERMINAL.
- LIRE LE MANUEL D'UTILISATION.
- SOLAMENTE RETIRE LA TAPA FRONTAL LUEGO DE 10 MIN. DE DESENERGIZADO EL EQUIPO.
- VIRE MANUAL DE INSTRUCCIONES.
- SOMENTE REMOVA A TAMPÁ FRONTAL 10 MIN. APÓS A DESENERGIZAÇÃO.
- LEIA O MANUAL DE INSTRUÇÕES.
- 仅限切断电源10分钟以后打开此防护盖。
- 操作前请仔细阅读阅读操作指导手册。



CFW320
VECTOR INVERTER



WARNING
ATTENTION
ATENÇÃO
警告


- REMOVE TERMINAL COVER ONLY 10 MIN. AFTER POWER HAS BEEN DISCONNECTED.
- READ THE INSTRUCTION MANUAL.
- ATTENDRE AU MOINS 10 MINUTES APRÈS AVOIR COUPÉ L'ALIMENTATION ÉLECTRIQUE AVANT D'OUVRIR LE BOÎTIER DU TERMINAL.
- LIRE LE MANUEL D'UTILISATION.
- SOLAMENTE RETIRE LA TAPA FRONTAL LUEGO DE 10 MIN. DE DESENERGIZADO EL EQUIPO.
- VIRE MANUAL DE INSTRUCCIONES.
- SOMENTE REMOVA A TAMPÁ FRONTAL 10 MIN. APÓS A DESENERGIZAÇÃO.
- LEIA O MANUAL DE INSTRUÇÕES.
- 仅限切断电源10分钟以后打开此防护盖。
- 操作前请仔细阅读阅读操作指导手册。

CFW320

The CFW320 is a **high-performance variable speed drive** for three-phase induction motors, ideal for applications on machines or equipment that require **precise control and easy operation**.

With a compact size, contactor-like installation, selectable WEG vector (VVW) or scalar (V/F) control, built-in operating interface (HMI), SoftPLC, free WPS programming software and plug-in accessories to add functionalities, it is a **flexible solution with excellent cost-benefit**.

Convenience all the time

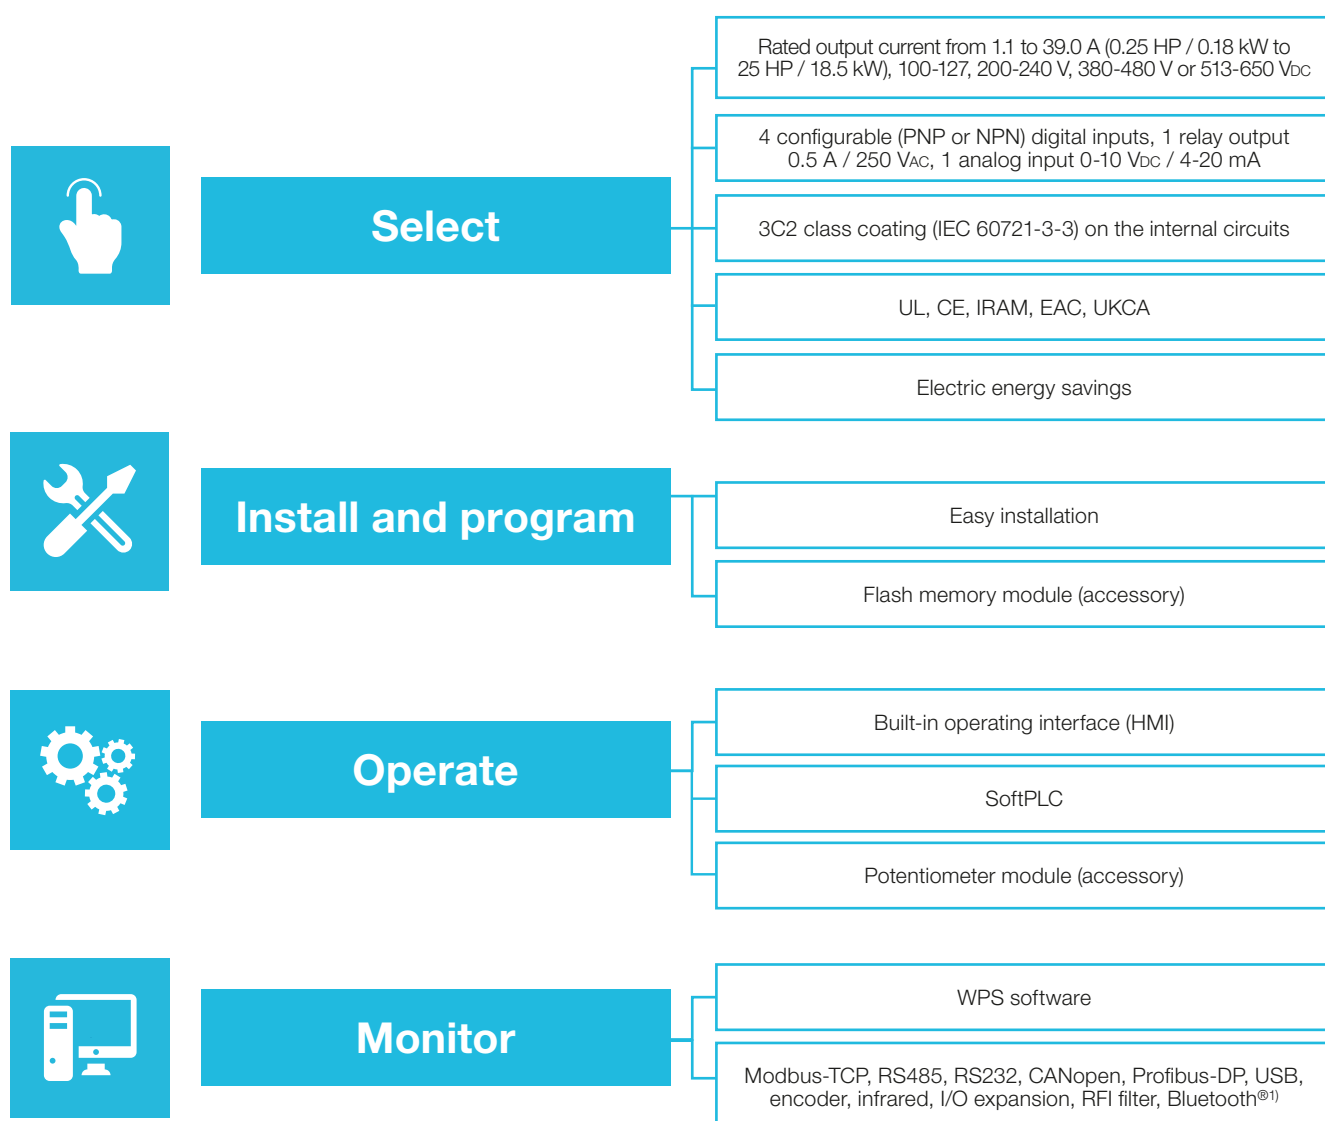

Note: 1) Check availability.



Single-phase, three-phase or DC-link power supply

Built-in inputs and outputs in the standard version

Greater protection for aggressive environments

Lead free, international certifications

High performance and efficiency

Ideal for machines or small devices

2 slots for function expansion through accessories

Available in the standard version at no additional cost

Green product, contributing to the conservation of the environment

Ideal for pumps and fans

Power supply on top and output to the motor at the bottom

Used to copy the CFW320 original programming and download it to others with the VSDs turned off

Easy and intuitive installation with less wiring inside the electrical panel

Faster setting and configuration and quick start-up

The CFW320 status information is easily viewed on the screen

Built-in software equivalent to a small PLC

Used to vary the speed reference locally

Simple operation, configurable screen information, remote operating interface (accessory)

Customization and integration of the CFW320 to different applications

Easiness to machine builders

Online monitoring, programming and configuration of the CFW320

Extra functionality expansion accessories

Easy and intuitive environment, free software

Flexibility, according to the application requirements

Flexibility

Flash memory module (MMF-uDrives accessory)

It downloads the original parameter setting to several CFW320 variable speed drives turned off.

2 slots for function expansion with accessories

Slots for
accessibility
and
network
communication
module

Slots for
input and
output (I/O)
expansion
module

RFI filter (accessory CFW320 - KFA / B / C / D)

Category C2 or C3 to reduce
the electromagnetic
interference emission level

Fan easily removable

Greater protection for aggressive environments

Standard coating classified as 3C2 according to IEC 60721-3-3 on all versions, ensuring greater protection to the internal circuits against corrosive atmospheres.

Connectivity

Bluetooth®¹⁾



Note: 1) Check availability.

Applications




Machines and equipment



Single-phase, three-phase or DC power supply



Industry in general




Opening and closing of gates



Centrifugal pump




Conveyor belt

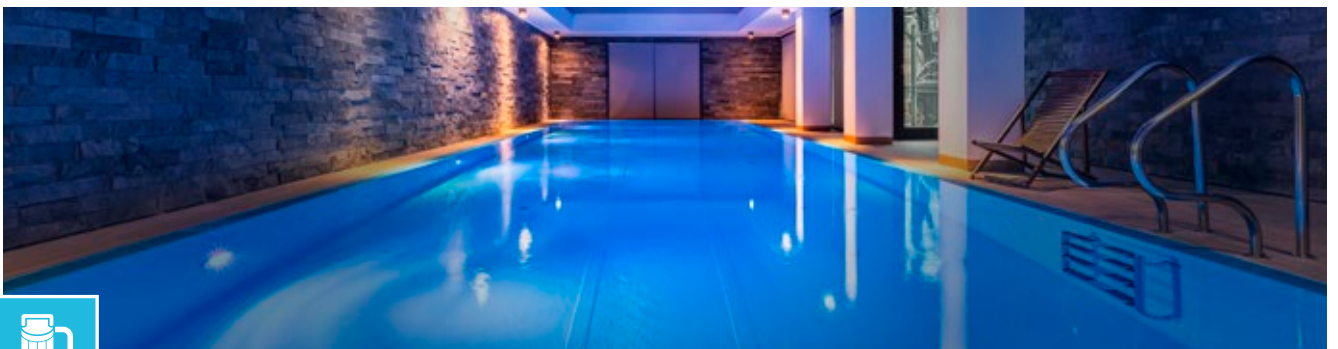

Stores or homes



Easy to use

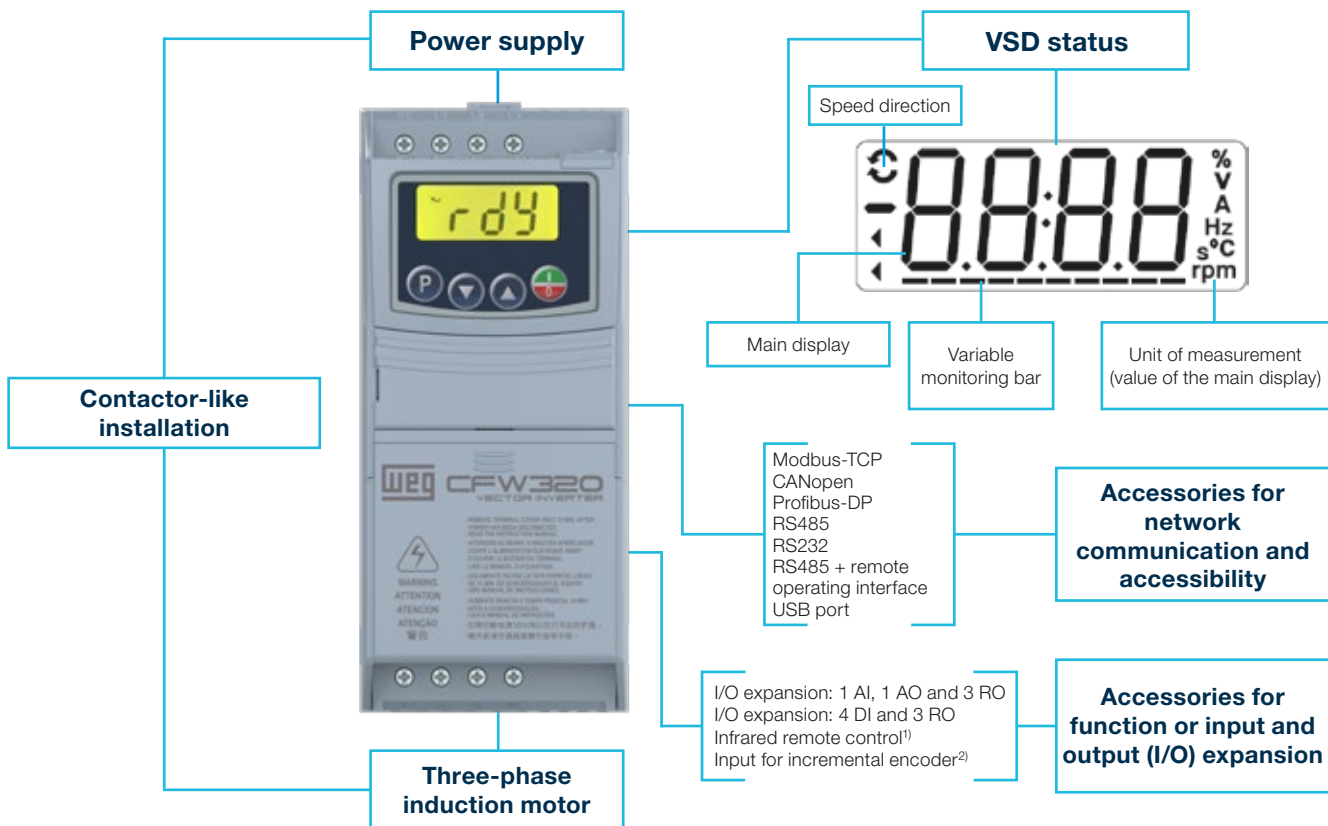

Notes: I/O = Inputs and outputs; AI = Analog input, AO = Analog output, RO = Relay output, DI = Digital input.

1) Included in the CFW320-IOADR accessory.

2) Included in the CFW320-IOAENC accessory.

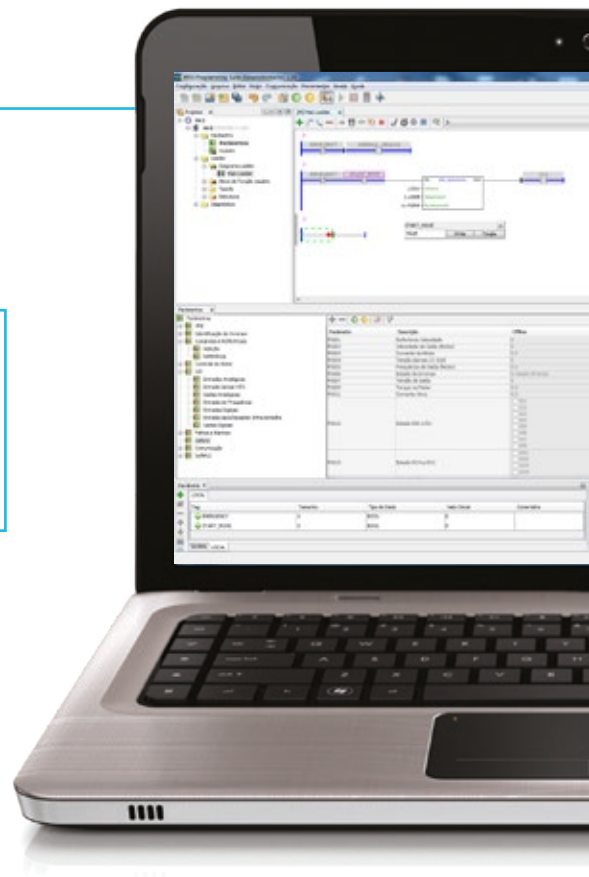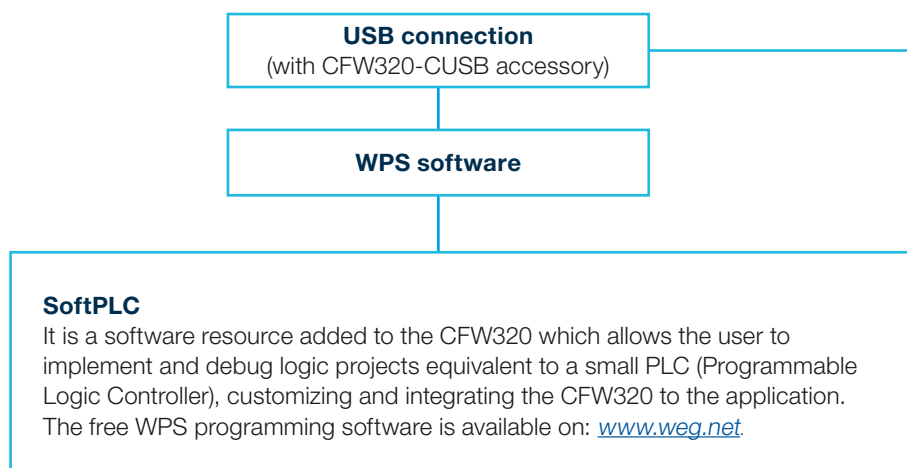

Main features

- Selectable V/F, quadratic V/F or VVW vector control
- Password to protect the setting
- Special engineering units (V, A, Hz, rpm, s, °C, %)
- Backup of all parameters (via WPS software, memory card or internal memory of the CFW320)
- Setting of the switching frequency according to the application requirements
- Speed reference via electronic potentiometer (EP)
- Speed reference via frequency input signal
- Multispeed with up to eight programmable speeds
- Slip compensation
- Manual or automatic torque boost (V/F scalar mode) or self-adjustment (VVW vector mode)
- 2 acceleration/deceleration ramps and emergency deceleration ramp
- "S" type ramp
- DC braking
- Internal dynamic braking (frame sizes B and C)
- Infrared control (via CFW320-IOAR accessory)
- PID controller to control processes in closed loop (via WPS)
- Flying start / ride through
- Skip frequency or frequency ranges
- Overload and overtemperature protection on the motor and IGBTs
- Overcurrent protection
- DC link voltage supervision
- Self-diagnosis alarm
- Fault log
- SoftPLC programming via free WPS software
- Fan control
- *Energy saving function*
- *Fire mode function*
- *Modbus master function*

Many more advantages


The CFW320 replaces direct online starters or star-delta starters:

- Electric energy savings
- Precise speed control
- Protection and increased useful life of the electric motor
- Fault log and diagnostics
- Easy operation and installation
- Flexible, allowing the installation of accessories in the application (Plug & Play)



Easy and friendly environment

Free on the website
www.weg.net

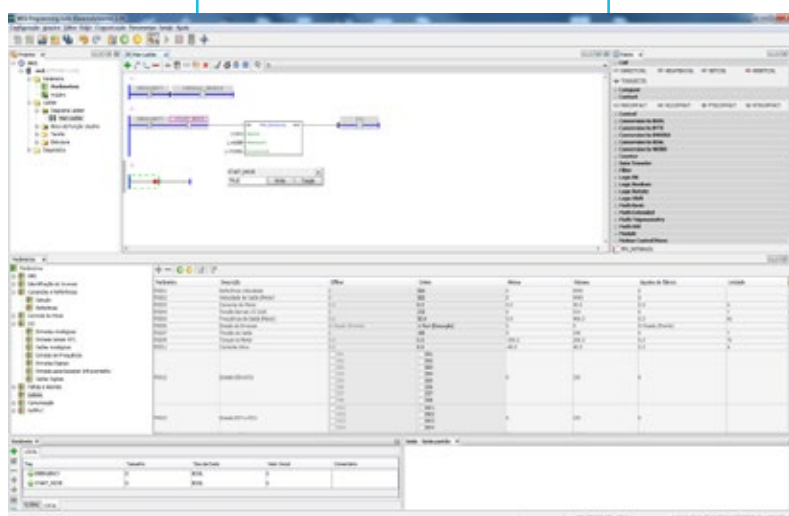

Coding

Inverter / smart code	Model identification				Internal dynamic braking (IGBT)	Protection degree	Hardware version	Software version
	Size	Rated output current	Number of phases	Rated voltage				
CFW320	A	01P6	S	2	NB	20		
	See availability in the following table							
	NB = without dynamic braking (IGBT) DB = with dynamic braking (IGBT)							
	20 = IP20							
	Hx = special hardware							
	Sx = special software							

Note: for versions with special hardware (Hx) and software (Sx), contact WEG Automation's sales department or your sales representative.

Available options

Size	Rated output current	Number of phases	Rated voltage	Braking	
A	01P6 = 1.6 A	S = single-phase power supply	1 = 110-127 V _{AC}	NB	
	02P6 = 2.6 A				
	04P2 = 4.2 A				
	06P0 = 6.0 A				
	01P6 = 1.6 A				
	02P6 = 2.6 A				
	04P2 = 4.2 A				
	06P0 = 6.0 A				
	07P3 = 7.3 A				
	01P6 = 1.6 A	T = three-phase power supply	2 = 200-240 V _{AC}		
	02P6 = 2.6 A				
	04P2 = 4.2 A				
	06P0 = 6.0 A				
	07P3 = 7.3 A				
	01P6 = 1.6 A	D = DC power supply	3 = 280-340 V _{DC}		
	02P6 = 2.6 A				
	04P2 = 4.2 A				
	06P0 = 6.0 A				
	07P3 = 7.3 A				
B	10P0 = 10.0 A	B = single-phase, three-phase or DC power supply	2 = 200-240 V _{AC} or 280-340 V _{DC}	DB	
	15P2 = 15.2 A	T = three-phase or DC power supply			
A	01P1 = 1.1 A	T = three-phase power supply	4 = 380-480 V _{AC}	NB	
	01P8 = 1.8 A				
	02P6 = 2.6 A				
	03P5 = 3.5 A				
	04P8 = 4.8 A				
B	06P5 = 6.5 A	T = three-phase or DC power supply	4 = 380-480 V _{AC} or 513-650 V _{DC}		DB
08P2 = 8.2 A					
C	10P0 = 10.0 A				
	12P0 = 12.0 A				
	15P0 = 15.0 A				
B	01P1 = 1.1 A				
	01P8 = 1.8 A				
	02P6 = 2.6 A				
	03P5 = 3.5 A				
	04P8 = 4.8 A				
	06P5 = 6.5 A				
08P2 = 8.2 A					
C	10P0 = 10.0 A				
	12P0 = 12.0 A				
	15P0 = 15.0 A				
D	24P0 = 24.0 A				
	31P0 = 31.0 A				
	39P0 = 39.0 A				

Specification

AC power supply

Reference	CFW320 variable speed drive ²⁾					Maximum applicable motor ¹⁾				
	Power supply (V)		Frame	Braking IGBT	Rated output current (A)	Power supply (V)	HP	kW		
CFW320A01P6S1NB20	110-127	Single-phase	A	Not available	1.6	220	0.25	0.18		
CFW320A02P6S1NB20					2.6		0.5	0.37		
CFW320A04P2S1NB20					4.2		1	0.75		
CFW320A06POS1NB20					6.0		1.5	1.1		
CFW320A01P6S2NB20	Single-phase	A	1.6		0.25		0.18			
CFW320A02P6S2NB20			2.6		0.5		0.37			
CFW320A04P2S2NB20			4.2		1		0.75			
CFW320A06POS2NB20			6.0		1.5		1.1			
CFW320A07P3S2NB20		7.3	2	1.5						
CFW320B10POB2DB20		Single-phase or three-phase	B	Internal included	10.0		3	2.2		
CFW320A01P6T2NB20		200-240	A	Not available	1.6		0.25	0.18		
CFW320A02P6T2NB20					2.6		0.5	0.37		
CFW320A04P2T2NB20	4.2				1		0.75			
CFW320A06POT2NB20	6.0				1.5		1.1			
CFW320A07P3T2NB20	7.3				2		1.5			
CFW320B10POB2DB20	B		Internal included	10.0	3		2.2			
CFW320B15P2T2DB20				15.2	5		3.7			
CFW320A01P1T4NB20				A	Not available	1.1	0.5	0.37		
CFW320A01P8T4NB20	1.8		1			0.75				
CFW320A02P6T4NB20	2.6		1.5			1.1				
CFW320A03P5T4NB20	3.5		2			1.5				
CFW320A04P8T4NB20	4.8		3			2.2				
CFW320B06P5T4NB20	B		Not available			6.5	4	3		
CFW320B08P2T4NB20		8.2				5	3.7			
CFW320C10POT4NB20	C	Internal included	10.0			6	4.5			
CFW320C12POT4NB20			12.0			7.5	5.5			
CFW320C15POT4NB20			15.0			10	7.5			
CFW320B01P1T4DB20	380-415	Three-phase	B	Internal included	1.1	380	0.5	0.37		
CFW320B01P8T4DB20					1.8		1	0.75		
CFW320B02P6T4DB20					2.6		1.5	1.1		
CFW320B03P5T4DB20					3.5		2	1.5		
CFW320B04P8T4DB20					4.8		3	2.2		
CFW320B06P5T4DB20					6.5		4	3		
CFW320B08P2T4DB20					8.2		5	3.7		
CFW320C10POT4DB20					C		Internal included	10.0	6	4.5
CFW320C12POT4DB20								12.0	7.5	5.5
CFW320C15POT4DB20								15.0	10	7.5
CFW320D24POT4DB20					D		Internal included	24.0	15	11
CFW320D31POT4DB20								31.0	20	15
CFW320D39POT4DB20								39.0	25	18.5
CFW320A01P1T4NB20	440-480	Three-phase	A	Not available	1.1		440	0.5	0.37	
CFW320A01P8T4NB20					1.8			1	0.75	
CFW320A02P6T4NB20					2.6			1.5	1.1	
CFW320A03P5T4NB20					3.5			2	1.5	
CFW320A04P8T4NB20					4.8	3		2.2		
CFW320B06P5T4NB20					B	Not available		5.6	4	3
CFW320B08P2T4NB20								7.6	5	3.7
CFW320C10POT4NB20					C	Internal included		8.3	6	4.5
CFW320C12POT4NB20								11.0	7.5	5.5
CFW320C15POT4NB20								14.0	10	7.5
CFW320B01P1T4DB20			B	Internal included	1.1	0.5		0.37		
CFW320B01P8T4DB20					1.8	1		0.75		
CFW320B02P6T4DB20					2.6	1.5		1.1		
CFW320B03P5T4DB20					3.5	2		1.5		
CFW320B04P8T4DB20					4.8	3		2.2		
CFW320B06P5T4DB20					5.6	4		3		
CFW320B08P2T4DB20					7.6	5		3.7		
CFW320C10POT4DB20					C	Internal included	8.3	6	4.5	
CFW320C12POT4DB20							11.0	7.5	5.5	
CFW320C15POT4DB20							14.0	10	7.5	
CFW320D24POT4DB20					D	Internal included	20.9	15	11	
CFW320D31POT4DB20							28.3	20	15	
CFW320D39POT4DB20							35.2	25	18.5	

Notes: 1) The power values for the maximum applicable motor shown in the table above are reference values and valid for WEG three-phase, four-pole induction motors with power supply of 220 V, 380 V or 440 V. The proper sizing of the CFW320 to be used must be determined as a function of the rated current of the motor used.

2) Designed for exclusive industrial or professional use.

Specification

DC power supply

Reference	CFW320 variable speed drive ²⁾				Maximum applicable motor ¹⁾					
	Power supply (V)		Frame	Braking IGBT	Rated output current (A)	Power supply (V)	cv	kW	UL	
									cv	kW
CFW320A01P6D3NB20	DC link (280-340 Vdc)	D3	A	Not available	1.6	220	0.25	0.18	-	-
CFW320A02P6D3NB20					2.6		0.5	0.37	-	-
CFW320A04P2D3NB20					4.2		1	0.75	-	-
CFW320A06P0D3NB20					6.0		1.5	1.32	-	-
CFW320A07P3D3NB20					7.3		2	1.5	-	-
CFW320B10P0B2DB20		B2	B	Internal included	10.0		3	2.2	-	-
CFW320B15P2T2DB20		T2			15.2		5	3.7	-	-
CFW320B06P5T4NB20	DC link (513-560 Vdc)	T4	B	Not available	6.5	380	4	3	-	-
CFW320B08P2T4NB20					8.2		5.5	4	5	3.7
CFW320C10P0T4NB20			C		10.0		6	4.5	-	-
CFW320C12P0T4NB20					12.0		7.5	5.5	-	-
CFW320C15P0T4NB20					15.0		10	7.5	-	-
CFW320B01P1T4DB20			B	Internal included	1.1		0.5	0.37	-	-
CFW320B01P8T4DB20					1.8		1	0.75	0.75	0.55
CFW320B02P6T4DB20					2.6		1.5	1.1	1	0.75
CFW320B03P5T4DB20					3.5		2	1.5	-	-
CFW320B04P8T4DB20					4.8		3	2.2	-	-
CFW320B06P5T4DB20					6.5		4	3	-	-
CFW320B08P2T4DB20					8.2		5.5	4	5	3.7
CFW320C10P0T4DB20			C	10.0	6		4.5	-	-	
CFW320C12P0T4DB20				12.0	7.5		5.5	-	-	
CFW320C15P0T4DB20				15.0	10		7.5	-	-	
CFW320D24P0T4DB20			D	24.0	15		11	-	-	
CFW320D31P0T4DB20				31.0	20		15	-	-	
CFW320D39P0T4DB20				39.0	25		18.5	-	-	
CFW320B06P5T4NB20	DC link (594-650 Vdc)	T4	B	Not available	5.6	440	4	3	-	-
CFW320B08P2T4NB20					7.6		5.5	4	5	3.7
CFW320C10P0T4NB20			C		8.3		6	4.5	-	-
CFW320C12P0T4NB20					11.0		7.5	5.5	-	-
CFW320C15P0T4NB20					14.0		10	7.5	-	-
CFW320B01P1T4DB20			B	Internal included	1.1		0.5	0.37	-	-
CFW320B01P8T4DB20					1.8		1	0.75	-	-
CFW320B02P6T4DB20					2.6		1.5	1.1	1	0.75
CFW320B03P5T4DB20					3.5		2	1.5	-	-
CFW320B04P8T4DB20					4.8		3	2.2	-	-
CFW320B06P5T4DB20					5.6		4	3	-	-
CFW320B08P2T4DB20					7.6		5.5	4	5	3.7
CFW320C10P0T4DB20			C	8.3	6		4.5	-	-	
CFW320C12P0T4DB20				11.0	7.5		5.5	-	-	
CFW320C15P0T4DB20				14.0	10		7.5	-	-	
CFW320D24P0T4DB20			D	20.9	15		11	-	-	
CFW320D31P0T4DB20				28.3	20		15	-	-	
CFW320D39P0T4DB20				35.2	25		18.5	-	-	

Notes: 1) The power values for the maximum applicable motor shown in the table above are reference values and valid for WEG three-phase, four-pole induction motors with power supply of 220 V, 380 V or 440 V. The proper sizing of the CFW320 to be used must be determined as a function of the rated current of the motor used.

2) Designed for exclusive industrial or professional use.

Accessories

The CFW320 has inputs and outputs in the standard version and allows installing Plug & Play accessories, which makes it flexible and increases its capacity to adapt to the requirements of different applications.

In the front part there are two independent slots: the upper slot, which can be used to add network communication or accessibility, and the lower slot, which can be used for input and output (I/O) expansion, incremental encoder input or infrared remote control kit.

Reference	Description	Illustrative figures
Upper slot - network communication and accessibility		
CFW320-CRS485	RS485 communication module	
CFW320-CUSB	USB communication module (with 2 m cable)	
CFW320-CRS232	RS232 communication module	
CFW320-CCAN	CANopen or DeviceNet communication module	
CFW320-CPDP	Profibus-DP communication module	
CFW320-IOP	Reference module via potentiometer	
CFW320-CETH	Ethernet communication module	
CFW320-CBLT	Communication module	
Lower slot - input and output (I/O) expansion		
CFW320-IOAR	1 analog input, 1 analog output and 3 relay outputs	
CFW320-IODR	4 digital inputs and 3 relay outputs	
CFW320-IOAENC	1 analog input, 2 analog outputs and 1 incremental encoder input	
CFW320-IOADR	1 NTC input, 3 relay outputs and 1 input for infrared sensor (infrared sensor, NTC and remote control with battery included)	
CFW320-IODF	Multipump application: 3 digital inputs in frequency, 3 digital outputs in frequency	
Remote operating interface (HMI)		
CFW320-KHMIR	Kit with remote HMI (CFW300-CRS485 + 3 m cable included)	
Flash memory		
MMF-uDrives	Flash memory module (1 m cable included)	
RFI filter		
CFW300-CFW320-KFA-S1-S2	RFI filter kit CFW320 frame A single-phase (200 V line) ¹⁾	
CFW300-CFW320-KFB-S2	RFI filter kit CFW320 frame B single-phase (200 V line) ¹⁾	
CFW320-KFA-T2	RFI filter kit CFW320 frame A three-phase (200 V line) ¹⁾	
CFW320-KFB-T2	RFI filter kit CFW320 frame B three-phase (200 V line) ¹⁾	
CFW320-KFA-T4	RFI filter kit CFW320 frame A three-phase (400 V line) ²⁾	
CFW320-KFB-T4	RFI filter kit CFW320 frame B three-phase (400 V line) ²⁾	
CFW320-KFC-T4	RFI filter kit CFW320 frame C three-phase (400 V line) ²⁾	
CFW320-KFD-T4	RFI filter kit CFW320 frame C three-phase (400 V line) ³⁾	

Notes: 1) The filter kit is supplied with the following components: RFI filter and connection bars.

2) The filter kit is supplied with the following components: RFI filter, connection bars and common-mode choke.

3) The filter kit is supplied with the following components: RFI filter, M3 screw, spring washer and flat washer, common mode choke for power supply.

Specification

Configuration of the plug-in modules⁶⁾

Reference	Slots ⁵⁾	Inputs			Outputs			Potentiometer for speed reference	USB ⁴⁾	Infrared sensors and NTC ³⁾	Bluetooth®	Encoder input ²⁾	Network communication		
		Analog	Digital	Frequency	Analog	Relay digital	Frequency						RS485	RS232	Others
CFW320-CRS485	Upper slot	-	-	-	-	-	-	-	-	-	-	-	1	-	-
CFW320-CRS232		-	-	-	-	-	-	-	-	-	-	-	-	1	-
CFW320-CCAN		-	-	-	-	-	-	-	-	-	-	-	-	-	CANopen or DeviceNet
CFW320-CPDP		-	-	-	-	-	-	-	-	-	-	-	-	-	Profibus-DP
CFW320-CUSB		-	-	-	-	-	-	-	1	-	-	-	-	-	-
CFW320-IOP		-	-	-	-	-	-	1	-	-	-	-	-	-	-
CFW320-CETH		-	-	-	-	-	-	-	-	-	-	-	-	-	Modbus-TCP
CFW320-CBLT		-	-	-	-	-	-	-	-	-	1	-	-	-	-
CFW320-IOAR	Lower slot	1	-	-	1	3	-	-	-	-	-	-	-	-	-
CFW320-IODR ¹⁾		-	4	-	-	3	-	-	-	-	-	-	-	-	-
CFW320-IOAENC		1	-	-	2	-	-	-	-	-	-	1	-	-	-
CFW320-IOADR		1	-	-	-	3	-	-	-	1	-	-	-	-	-
CFW320-IOADR-D		-	-	-	-	3	-	-	-	1	-	-	-	-	-
CFW320-IODF		-	-	3	-	-	3	-	-	-	-	-	-	-	-

Notes: 1) Configurable isolated digital inputs (NPN or PNP).

2) Incremental encoder (A/A - B/B), power supply of +5 V @ 100 mA for the encoder, maximum frequency of 400 kHz.


3) Remote control and battery included.

4) USB cable included.

5) It allows 1 plug-in module in the upper slot (network communication or accessibility) and 1 plug-in module in the lower slot (input/output expansion).

6) The standard version of the CFW320 already has 4 (configurable) PNP or NPN digital inputs, 1 analog input 0-10 V_{cc} / 4-20 mA and 1 relay output 0.5 A / 250 V_{ac}.

Dimensions

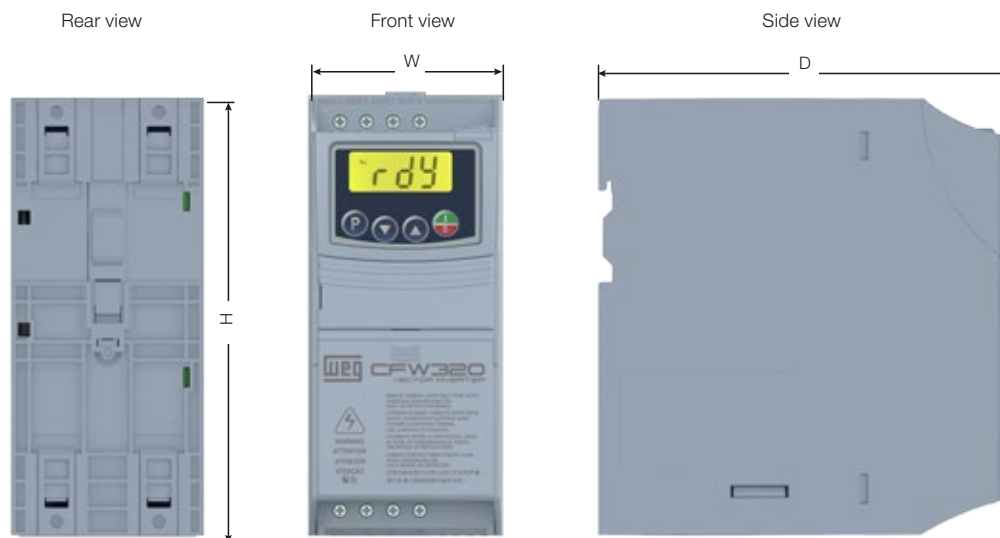

Dimensions without RFI filter

Size	H mm (in)	W mm (in)	D mm (in)	Weight kg (Lb)
A	157.9 (6.22)	70.0 (2.76)	148.4 (5.84)	0.90 (1.98)
B	198.9 (8.08)	70.0 (2.76)	158.4 (6.24)	1.34 (2.95)
C	214.0 (8.43)	89.0 (3.50)	164.0 (6.45)	1.50 (3.30)
D	334.5 (13.17)	186 (7.32)	163.6 (6.44)	4.5 (9.82)


Note: tolerance of the dimensions: ±1.0 mm (±0.039 in).

Technical data


Power data	Power supply	Voltage tolerance: -15% to +10% of the rated voltage Frequency: 50/60 Hz (48 Hz to 62 Hz) Phase imbalance: $\leq 3\%$ of the rated phase-phase input voltage Overvoltage according to category III (EM 61010/UL 508C) Transient voltages according to category III Maximum of 10 connections per hour (1 every 6 minutes) Typical efficiency: $\geq 97\%$ Classification of chemically active substances: level 3C2 Classification of mechanical conditions (vibration): level 3M4 Audible noise level: < 60 dB
Installation and connection	Environment conditions permitted for operation	Temperature around the VSD: from 0 °C to 50 °C (200 V line) and from 0 °C to 40 °C (400 V line) For higher temperatures than the specifications above, it is necessary to apply 2% of current derating for each Celcius degree, limited to an increase of 10 °C Air relative humidity: 5% to 95% non-condensing Maximum altitude: up to 1,000 m - rated conditions 1,000 m to 4,000 m - 1% current derating for each 100 m above 1,000 m From 2,000 m to 4,000 m above sea level – maximum voltage derating (127 V / 240 V / 480 V, according to the model) of 1.1% for each 100 m above 2,000 m Pollution degree: 2 (according to EN 50178 and UL 508C), with non-conductive pollution. Condensation must not cause conduction of the accumulated residues
Control	Method	- V/F (scalar) - V/F (quadratic) - VVV: voltage vector control - PWM SVM (Space Vector Modulation)
	Output frequency	0 to 400 Hz, resolution of 0.1 Hz
Performance	V/F control	Speed regulation: 1% of the rated speed (with sleep compensation) Speed variation range: 1:20
	Vector control (VVV)	Speed regulation: 1% of the rated speed Speed variation range: 1:30
Inputs ¹⁾	Analog	1 isolated input: 0 to 10 V or 0 to 20 mA or 4 to 20 mA Linearity error $\leq 0.25\%$ Impedance: 100 kΩ for voltage input, 500 Ω for current input Programmable functions Voltage on the inputs: 30 V_{dc}
	Digital	4 isolated inputs. Programmable functions: - Active high (PNP): maximum low level of 10 V_{dc} minimum high level 20 V_{dc} - Active low (NPN): maximum low level of 5 V_{dc} minimum high level of 10 V_{dc} Maximum input voltage of 30 V_{dc} Input current: 11 mA Max. input current: 20 mA
Outputs ¹⁾	Relay	1 relays with NO/NC contact Maximum voltage: 250 V_{ac} Maximum current: 0.5 A Programmable functions
	Power supply	10 V _{dc} power supply maximum capacity: 50 mA
Safety	Protection	Overcurrent/phase-phase short circuit in the output Under/overvoltage at the power supply Motor overload Overtemperature in the power module (IGBTs) External fault/alarm Programming error
Human machine interface (HMI)	Built-in	4 keys: run/stop, increment, decrement and setting LCD display Indication accuracy: - Current: 10% of the rated current - Speed resolution: 0.1 Hz
Communication	Communication networks or accessibility	Modbus-TCP, RS485, RS232, CANopen, DeviceNet, Ethernet, Profibus-DP or USB Port, Bluetooth® (with plug-in modules)
Protection rating	IP20	Frame A, B, C and D

Note: 1) Available in the standard version.

Block diagram

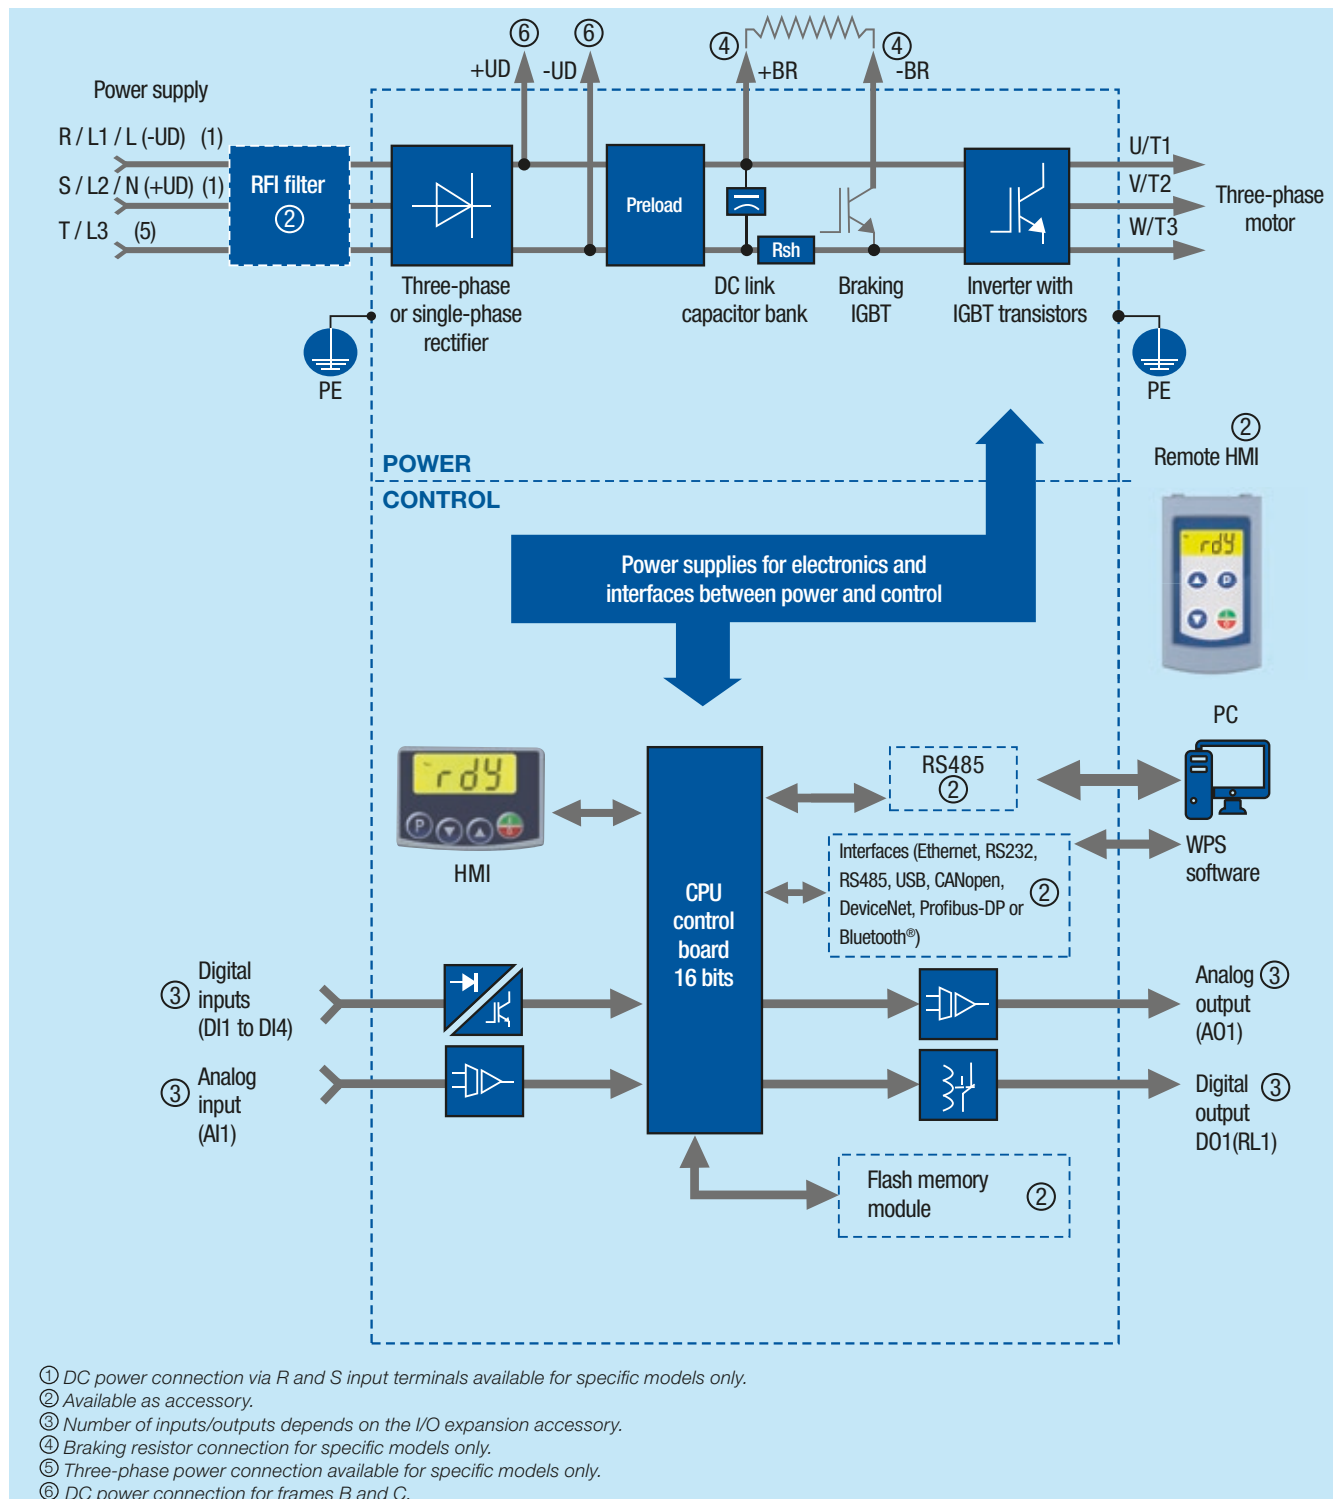

[illegible]

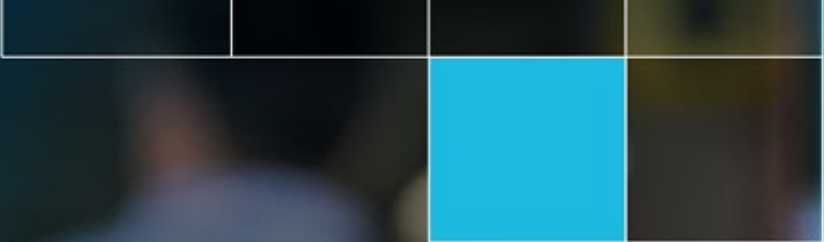

Global presence

is essential, as much
as understanding
your needs.



Global Presence

With more than 49,000 employees worldwide, WEG is one of the largest electric motors, electronic equipment and systems manufacturers. We are constantly expanding our portfolio of products and services with expertise and market knowledge. We create integrated and customized solutions ranging from innovative products to complete after-sales service.

WEG's know-how guarantees our **CFW320 – Variable Speed Drive** is the right choice for your application and business, assuring safety, efficiency and reliability.





Availability is to have a global support network



Partnership is to create solutions that suits your needs



Competitive edge is to unite technology and innovation

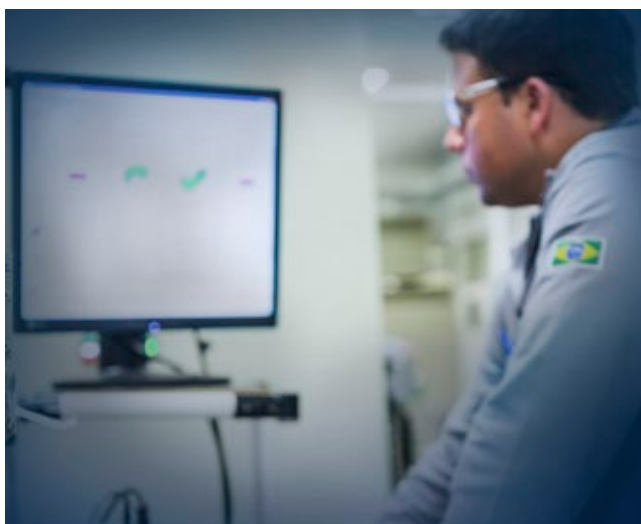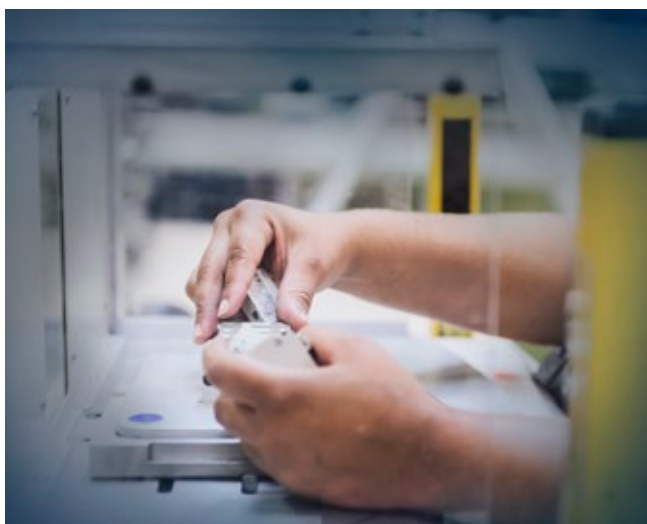

Learn More

High performance and reliable products to improve your production process.



Excellence is to provide a whole solution in industrial automation that improves our customers productivity.

Visit: www.weg.net

 youtube.com/wegvideos

The scope of WEG Group solutions
is not limited to products and solutions
presented in this catalogue.

To see our portfolio, contact us.

**For WEG's worldwide
operations visit our website**



www.weg.net



+55 47 3276.4000



automacao@weg.net



Jaraguá do Sul - SC - Brazil

Cod: 50123924 | Rev: 02 | Date (m/y): 05/2026.

The values shown are subject to change without prior notice.
The information contained is reference values.