




Card edge, 2x50 fingers. Pin 2 is rightmost seen from the component side
No series resistors, no buffers: every bus net goes straight to the module.




Four 2x8 pin strips P1-P4 round a 25.4 mm square, drawn here in the order of the GPIO numbers. GPIO0-17, 19-43 and 45 as in hardware/PINMAP.md. Different: GPIO18 microSD CS, GPIO44 / 46 / 47 I2S.





The card is powered by the Amiga, or by the module's FPC adapter on the bench. The port never powers the card.

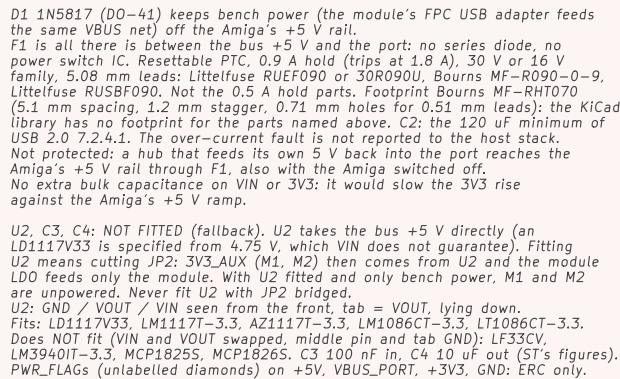


GPIO45 high asserts the interrupt (push-pull, high = asserted: the drive of firmware feature int-nfet)
JP1 is bridged 1-2 as delivered: /INT2. Cut 1-2 and bridge 2-3 for /INT6.

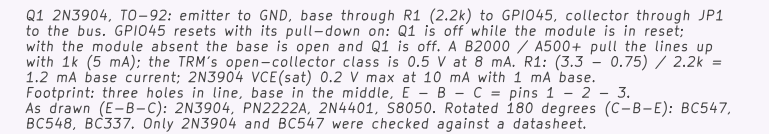


D+ / D- from U1 P2.9 / P2.7 (27R on the module) to J2 and J3 in parallel; only one of the two is used. VBUS_PORT from the bus +5 V through F1 (power block).




Two 1x6 rows, 2.54 mm, 20.32 mm apart, drawn as seen from the top with the jack opening away from the viewer. Pin 1 of each row at the jack-opening end. Module silk: J1 left row (M1J1), J2 right row (M1J2).




One row of 6 pins, 3.3 V, no level shifter. Pin 1 = 3V3. Shares SPI1 with M1.



The 6-pin row on its short edge, in board order. Audio leaves through the breakout's 3.5 mm jack.

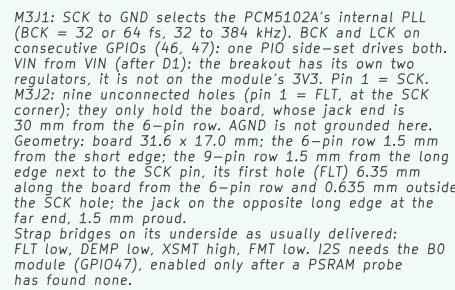

J4, J5: 1x3 2.54 mm footprints, DNP. J4 is placed clear of every other connector.



Design notes: hardware/picozorro-one-th/README.md
Zorro II network + USB card, through-hole, bought modules
PicoZorro (CERN-OHL-S v2)

Sheet: /
File: picozorro-one-th.kicad_sch

Title: *PicoZorro One TH*

Size: A2	Date:
----------	-------

KiCad E.D.A. 10.0.6

10

Rev: A

Id: 1/1