![CYPRESS EMBEDDED IN TOMORROW]

EZ-BLE™ PSoC® EVALUATION BOARD
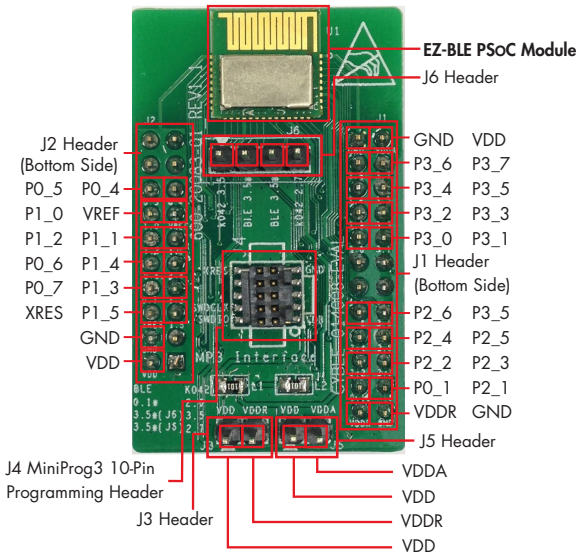
CYBLE-014008-EVAL

Bluetooth® SMART

The EZ-BLE™ PSoC® Evaluation Board (CYBLE-014008-EVAL) enables you to evaluate and develop applications on the EZ-BLE PSoC Module (CYBLE-014008-00). The EZ-BLE PSoC Module is a fully-integrated, fully-certified, 11 mm x 11 mm x 1.8 mm, programmable, Bluetooth® Smart module designed to reduce your time-to-market.

For more information visit:

www.cypress.com/EZ-BLEModule - The EZ-BLE Module home page.
www.cypress.com/EZ-BLEEval - The EZ-BLE PSoC Evaluation Board kit page.
www.cypress.com/AN96841 - The getting started guide.

EZ-BLE PSoC Module
J6 Header

J2 Header (Bottom Side)
P0_5   P0_4
P1_0   VREF
P1_2   P1_1
P0_6   P1_4
P0_7   P1_3
XRES   P1_5
GND
VDD

GND   VDD
P3_6   P3_7
P3_4   P3_5
P3_2   P3_3
P3_0   P3_1
J1 Header (Bottom Side)
P2_6   P3_5
P2_4   P2_5
P2_2   P2_3
P0_1   P2_1
VDDR   GND
J5 Header

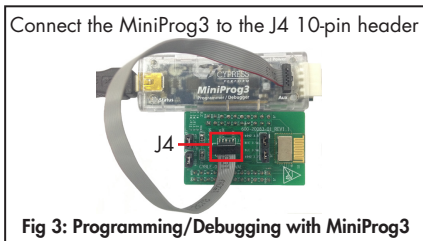J4 MiniProg3 10-Pin Programming Header
J3 Header

VDDA
VDD
VDDR
VDD

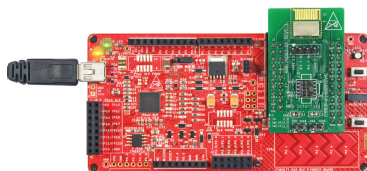**Fig 1: CYBLE-014008-00-EVAL Pinout Description**

Note: To use the CYBLE-014008-EVAL you must separately purchase either the CY8CKIT-002 MINIPROG3 or the CY8CKIT-042-BLE BLE PIONEER KIT.

EZ-BLE™ PSoC® EVALUATION BOARD

1: Connect the CYBLE-014008-00-EVAL to the CY8CKIT-002 (MiniProg3)

Connect a jumper on the J3 and J5 headers

Fig 2: J3 and J5 Headers

Connect the MiniProg3 to the J4 10-pin header

Fig 3: Programming/Debugging with MiniProg3

OR

Plug the CYBLE-014008-EVAL on the CY8CKIT-042-BLE baseboard.

Note: Jumpers on CYBLE-014008-EVAL's J3 or J5 headers can be connected or disconnected.

Fig 4: Programming and debugging with CY8CKIT-042-BLE BLE Pioneer Kit Baseboard

Pin Mapping between CY8CKIT-042-BLE (Base) and CYBLE-014008-00 EVAL (Eval)							
(Base)	(Eval)	(Base)	(Eval)	(Base)	(Eval)	(Base)	(Eval)
GND	GND	P0_7	P0_7	P2_1	P2_1	P3_1	P3_1
VDDD, VDDA	VDD	P1_0	P1_0	P2_2	P2_2	P3_2	P3_2
VDDR	VDDR	P1_1	P1_1	P2_3	P2_3	P3_3	P3_3
XRES	XRES	P1_2	P1_2	P2_4	P2_4	P3_4	P3_4
VREF	VREF	P1_3	P1_3	P2_5	P2_5	P3_5[1]	P3_5[1]
P0_4	P0_4	P1_4	P1_4	P2_6	P2_6	P3_6	P3_6
P0_5	P0_5	P1_5	P1_5	P2_7[1]	P3_5[1]	P3_7	P3_7
P0_6	P0_6	P2_0	P0_1	P3_0	P3_0		

1 The J6 header provides flexibility to route P3_5 of the EZ-BLE Module to the P2_7 and/or P3_5 connections of the Pioneer Baseboard.

2: Create a project using the CYBLE-014008-00 MPN and program/debug using PSoC® Creator™ 3.3

The EZ-BLE PSoC Module is qualified for the Bluetooth 4.1 specification and is certified for the 2.4 GHz unlicensed frequency range in USA (FCC), Canada (IC), Europe (CE), Japan (TELEC) and Korea (KC).

Visit www.cypress.com/support for technical support

RoHS COMPLIANT CE

CYPRESS
EMBEDDED IN TOMORROW™