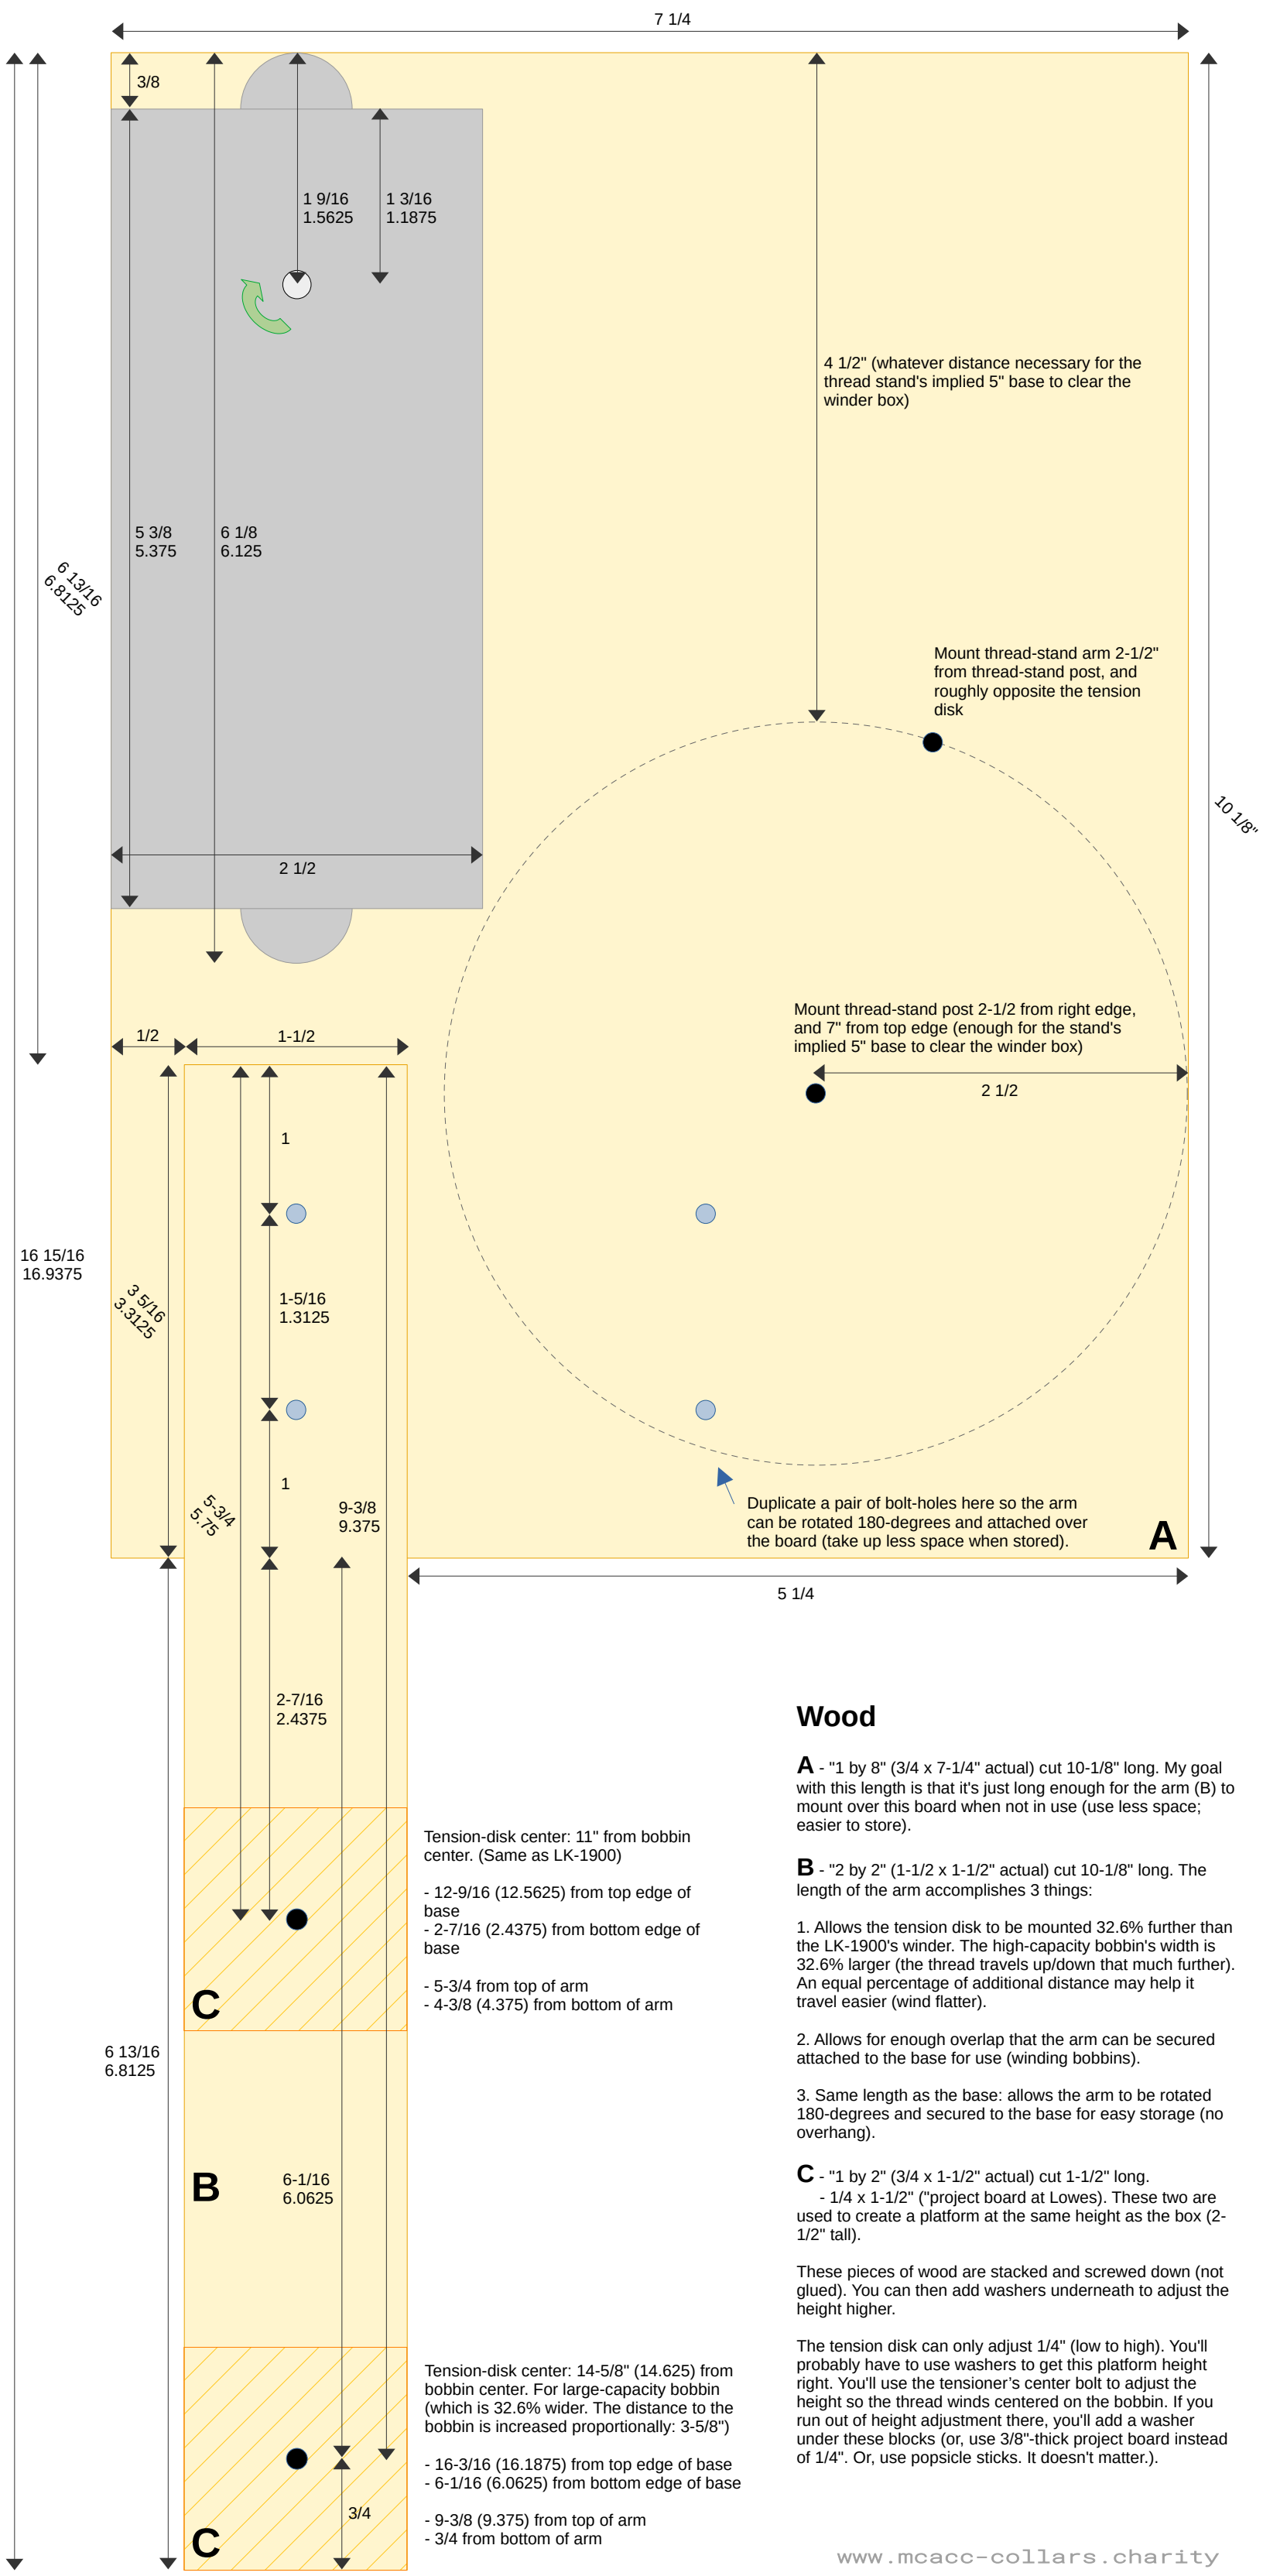

Tension-disk center: 11" from bobbin center. (Same as LK-1900)

- 12-9/16 (12.5625) from top edge of base
- 2-7/16 (2.4375) from bottom edge of base

- 5-3/4 from top of arm
- 4-3/8 (4.375) from bottom of arm

Tension-disk center: 14-5/8" (14.625) from bobbin center. For large-capacity bobbin (which is 32.6% wider. The distance to the bobbin is increased proportionally: 3-5/8")

- 16-3/16 (16.1875) from top edge of base
- 6-1/16 (6.0625) from bottom edge of base

- 9-3/8 (9.375) from top of arm
- 3/4 from bottom of arm

Wood

A - "1 by 8" (3/4 x 7-1/4" actual) cut 10-1/8" long. My goal with this length is that it's just long enough for the arm (B) to mount over this board when not in use (use less space; easier to store).

B - "2 by 2" (1-1/2 x 1-1/2" actual) cut 10-1/8" long. The length of the arm accomplishes 3 things:

1. Allows the tension disk to be mounted 32.6% further than the LK-1900's winder. The high-capacity bobbin's width is 32.6% larger (the thread travels up/down that much further). An equal percentage of additional distance may help it travel easier (wind flatter).

2. Allows for enough overlap that the arm can be secured attached to the base for use (winding bobbins).

3. Same length as the base: allows the arm to be rotated 180-degrees and secured to the base for easy storage (no overhang).

C - "1 by 2" (3/4 x 1-1/2" actual) cut 1-1/2" long.
- 1/4 x 1-1/2" ("project board at Lowes). These two are used to create a platform at the same height as the box (2-1/2" tall).

These pieces of wood are stacked and screwed down (not glued). You can then add washers underneath to adjust the height higher.

The tension disk can only adjust 1/4" (low to high). You'll probably have to use washers to get this platform height right. You'll use the tensioner's center bolt to adjust the height so the thread winds centered on the bobbin. If you run out of height adjustment there, you'll add a washer under these blocks (or, use 3/8"-thick project board instead of 1/4". Or, use popsicle sticks. It doesn't matter.).