

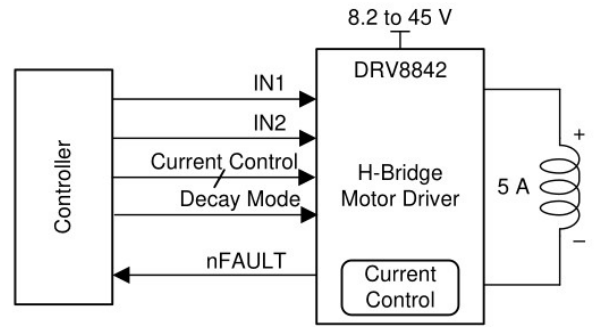


H-DRV8842-R0 DC Motor Driver Board

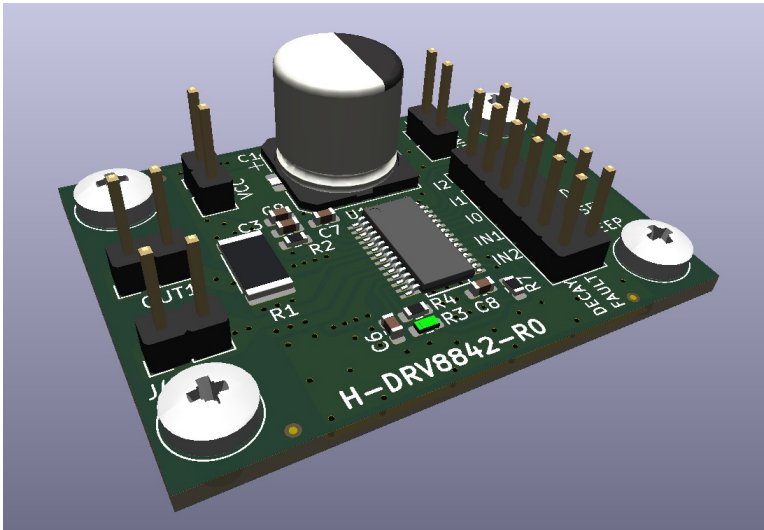

H-DRV8842-R0 Pinout

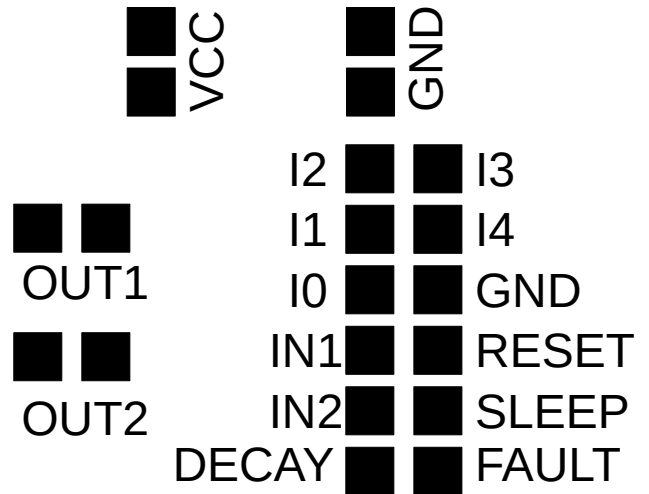


- Single H-Bridge Current-Control Motor Driver
- 8.2-V to 45-V Operating Supply Voltage Range
- Five-Bit Winding Current Control Allows Up to 32 Current Levels
- Low MOSFET RDS(on) Typical 0.2 Ω (HS + LS)
- 5-A Maximum Drive Current at 24 V, 25°C
- Industry-Standard PWM Control Interface
- Protection Features:
 - Overcurrent Protection (OCP)
 - Thermal Shutdown (TSD)
 - VM Undervoltage Lockout (UVLO)
 - Fault Condition Indication Pin (nFAULT)

Applications

- Printers
- Scanners
- Office Automation Machines
- Gaming Machines
- Factory Automation
- Robotics

H-DRV8842-R0 Dimensions

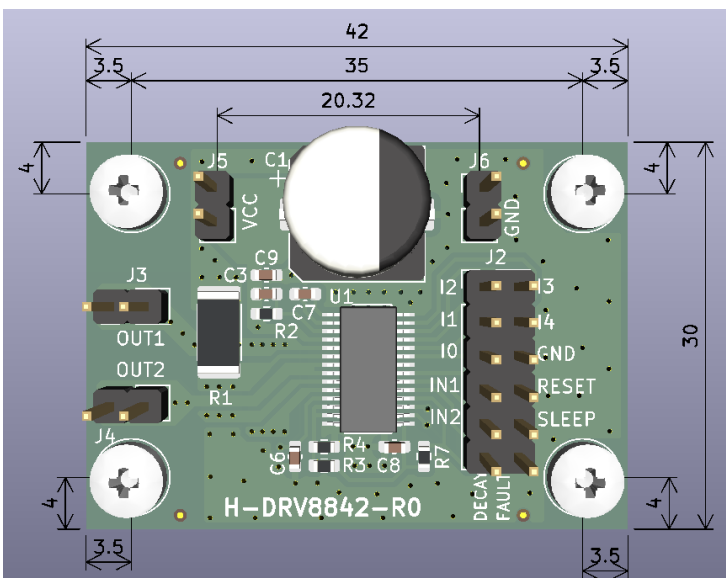

CONTROL		
IN1	Input 1	Logic input controls state of OUT1. Internal pullup.
IN2	Input 2	Logic input controls state of OUT2. Internal pullup.
I0	Current set inputs	Sets winding current as a percentage of full-scale. Internal pullup.
I1		
I2		
I3		
I4		
DECAY	Decay mode	Low = slow decay, open = mixed decay, high = fast decay. Internal pullup and pullup.
RESET	Reset input	Active-low reset input initializes the logic and disables the H-bridge outputs. Internal pullup.
SLEEP	Sleep mode input	Logic high to enable device, logic low to enter low-power sleep mode. Internal pullup.
FAULT	Fault	Logic low when in fault condition (overtemperature, overcurrent)
VCC-GND	Bridge A power supply	Connect to motor supply (8.2 - 45 V).