main_lower_left — HOLD / LED DRILLING

FRONT / CLIMBING FACE: left stays left. Drill perpendicular through panel toward rear; do not mirror.

TOP — width / height 1219.2 mm (48 in)

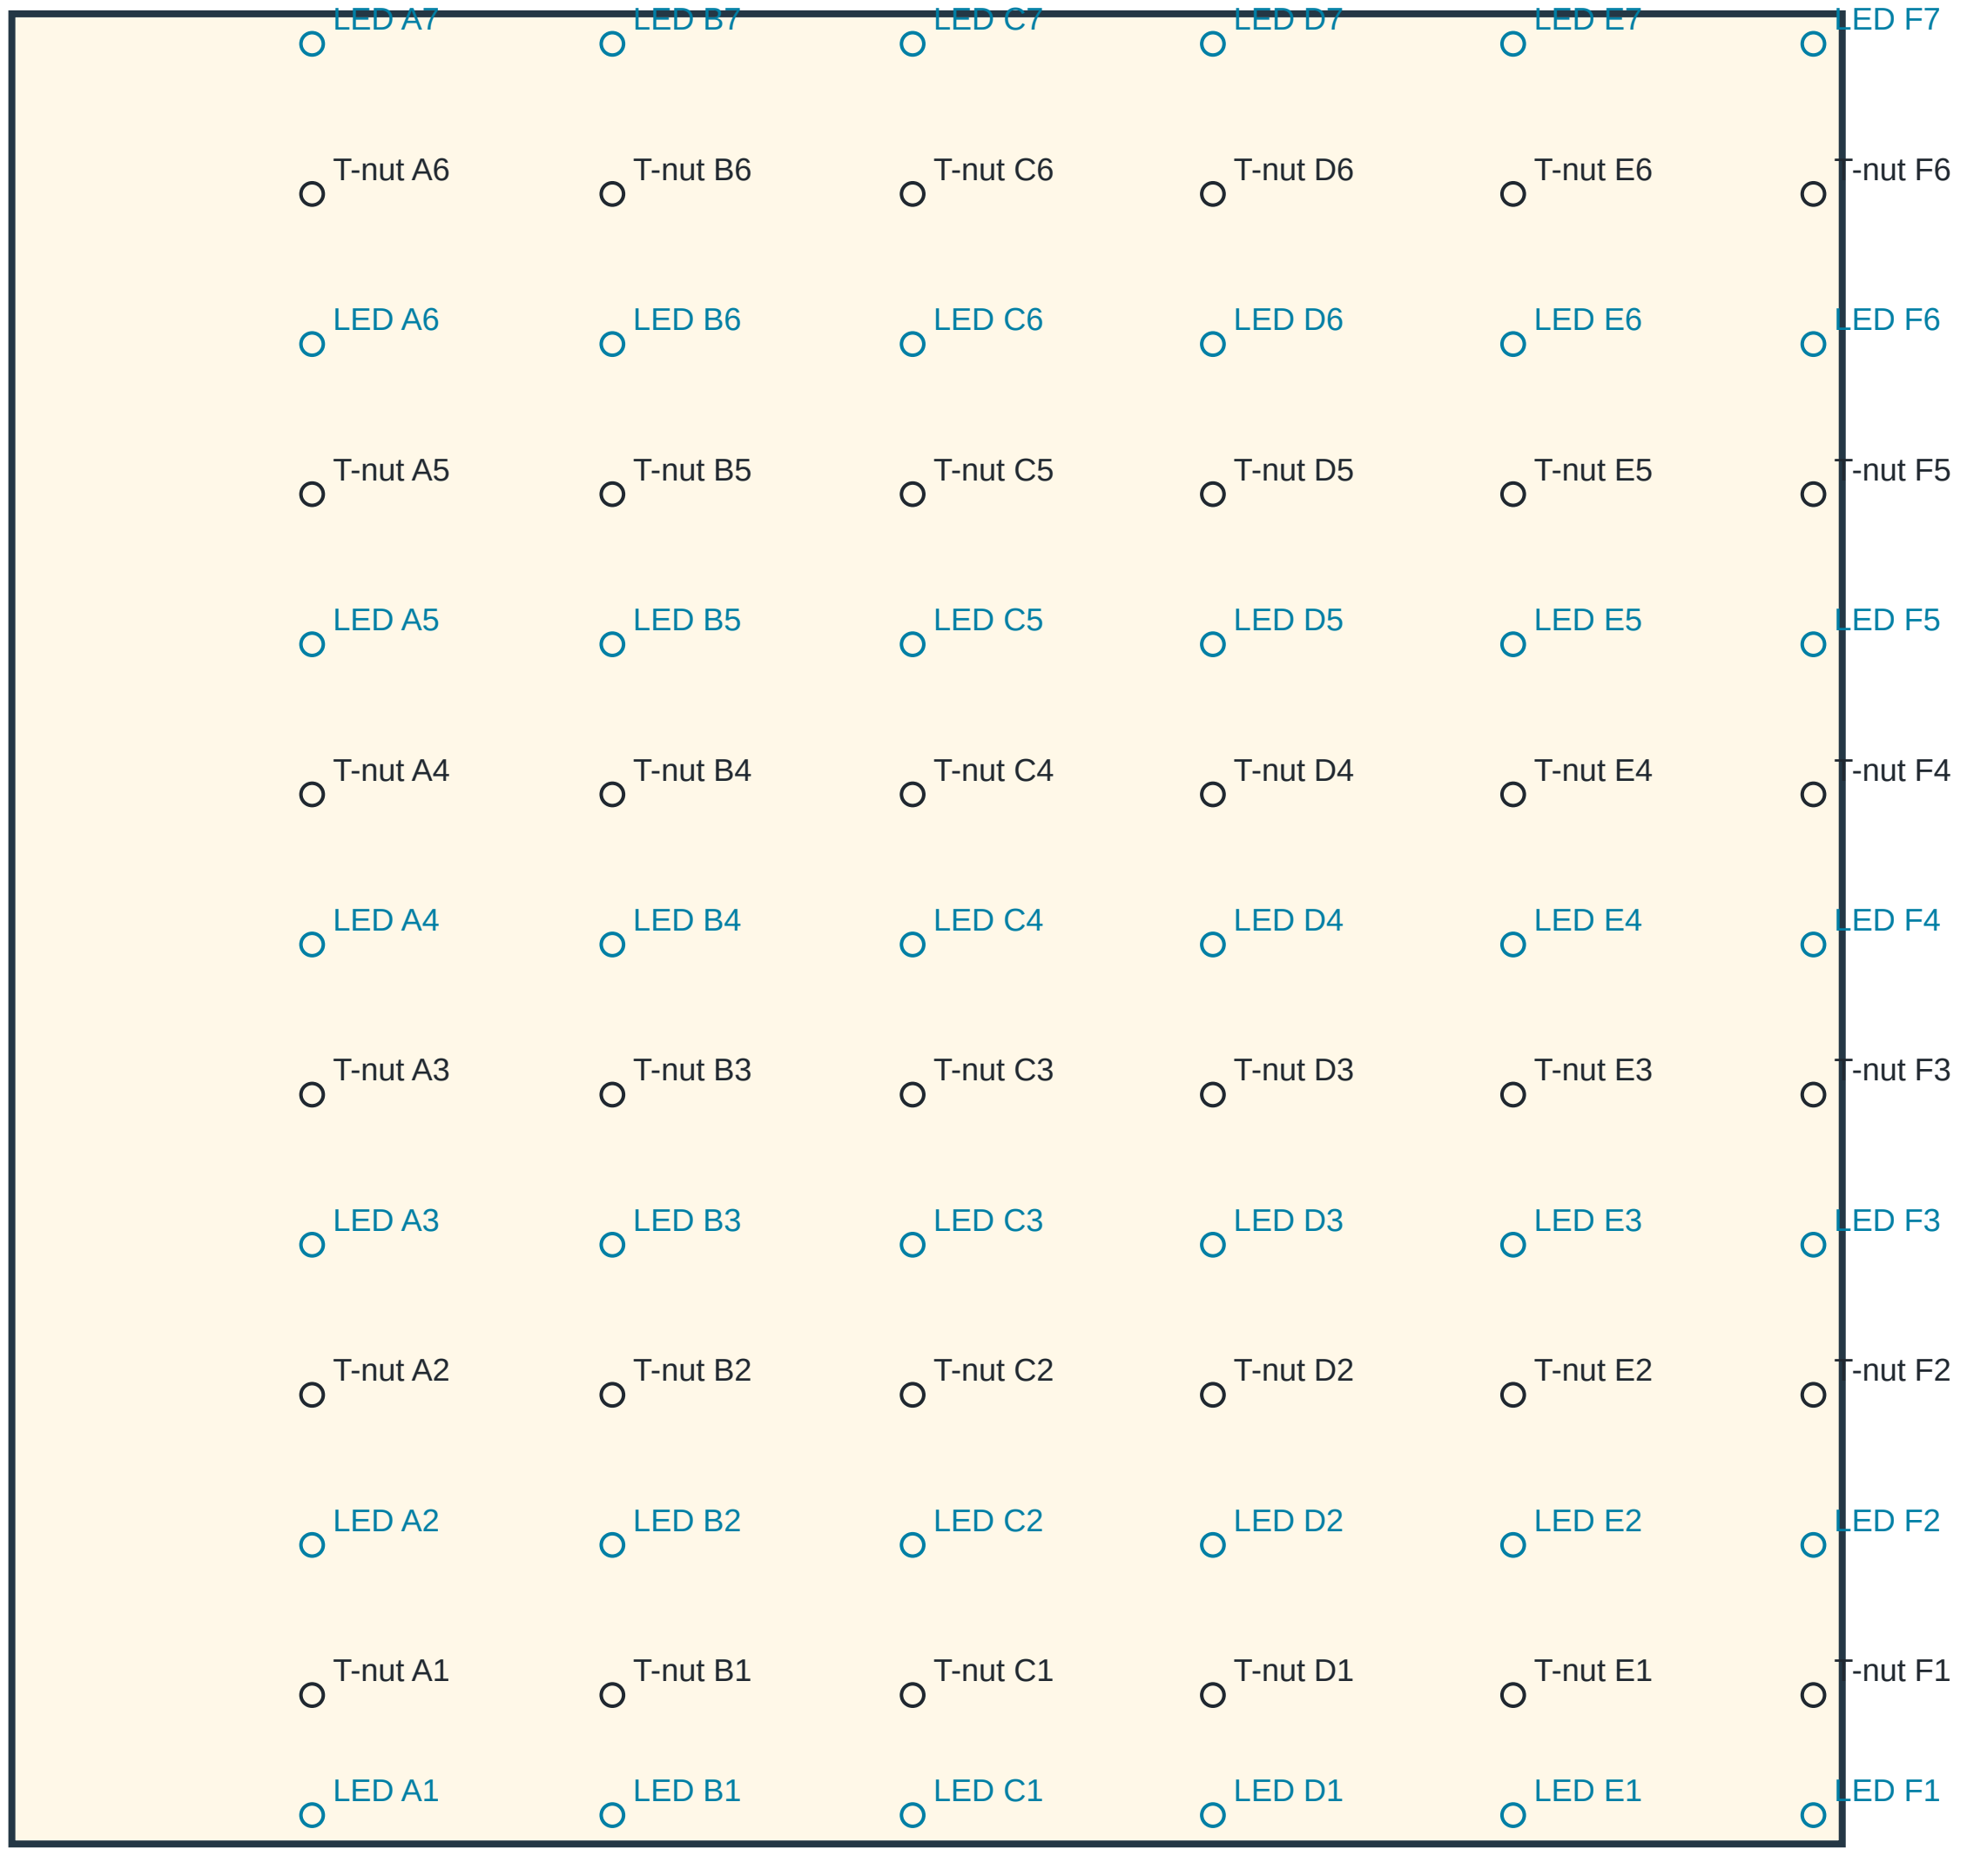

1219.2 mm stock adaptation of nominal 1220 mm metric template; no scaling.

Lower LED1: 19.2 mm above bottom. LED7 belongs to LOWER panel, 20 mm below top.

T-nut rows 6–7 remain 220 mm apart. Panel fastening holes are a separate schedule.

DATUM / DIRECTION

Measure from TOP edge DOWN.

X: from this panel’s LEFT edge → RIGHT.

Black: T-nut bore Ø11.1125 mm (7/16 in).

Blue: LED bore Ø13.000 mm.

CAD diameters; verify actual purchased hardware.

No T-nut mounting-screw pilot schedule here.

COLUMN: distance from LEFT (mm)

A: 200.000

B: 400.000

C: 600.000

D: 800.000

E: 1000.000

F: 1200.000

ROW: TOP edge → DOWN (mm)

LED 1: 1200.000

T-nut 1: 1120.000

LED 2: 1020.000

T-nut 2: 920.000

LED 3: 820.000

T-nut 3: 720.000

LED 4: 620.000

T-nut 4: 520.000

LED 5: 420.000

T-nut 5: 320.000

LED 6: 220.000

T-nut 6: 120.000

LED 7: 20.000

DEVELOPMENT REFERENCE — NOT RELEASED FOR CONSTRUCTION. Dimensions govern; do not scale or use as a drill template.

main_lower_right — HOLD / LED DRILLING

FRONT / CLIMBING FACE: left stays left. Drill perpendicular through panel toward rear; do not mirror.

TOP — width / height 1219.2 mm (48 in)

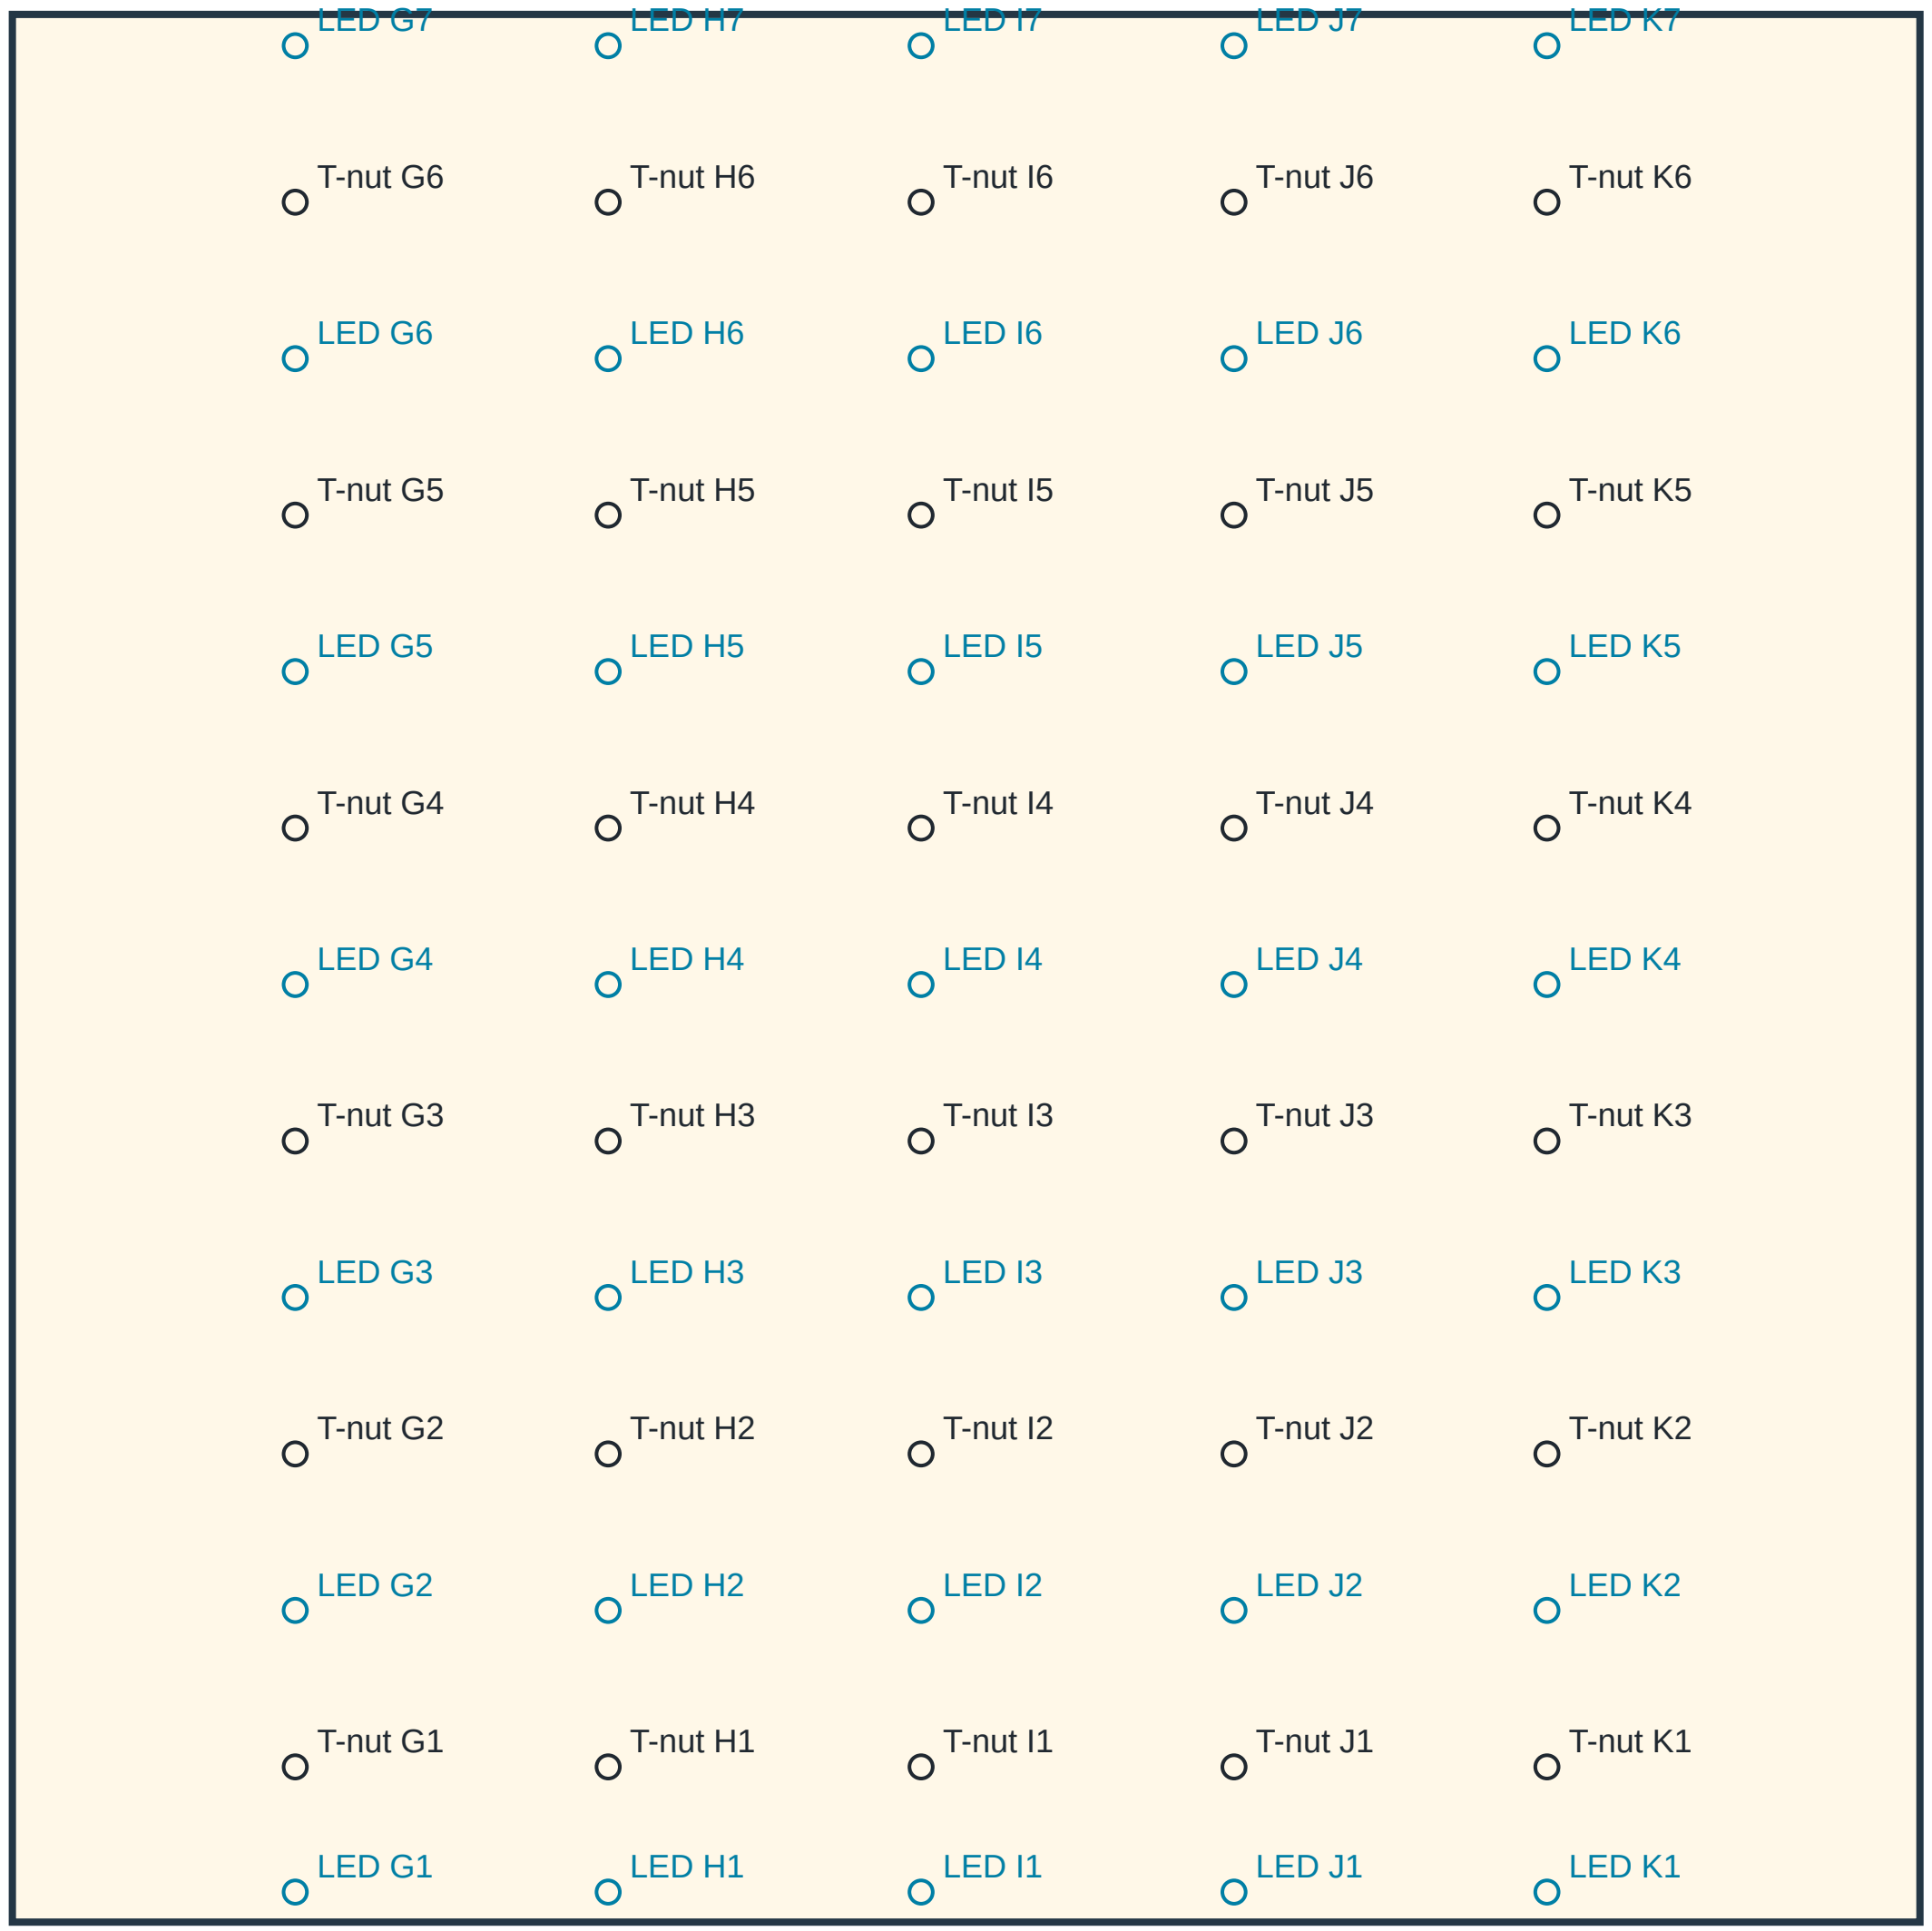

DATUM / DIRECTION
Measure from TOP edge DOWN.
X: from this panel’s LEFT edge → RIGHT.
Black: T-nut bore Ø11.1125 mm (7/16 in).
Blue: LED bore Ø13.000 mm.
CAD diameters; verify actual purchased hardware.
No T-nut mounting-screw pilot schedule here.

COLUMN: distance from LEFT (mm)
G: 180.800
H: 380.800
I: 580.800
J: 780.800
K: 980.800

ROW: TOP edge → DOWN (mm)
LED 1: 1200.000
T-nut 1: 1120.000
LED 2: 1020.000
T-nut 2: 920.000
LED 3: 820.000
T-nut 3: 720.000
LED 4: 620.000
T-nut 4: 520.000
LED 5: 420.000
T-nut 5: 320.000
LED 6: 220.000
T-nut 6: 120.000
LED 7: 20.000

1219.2 mm stock adaptation of nominal 1220 mm metric template; no scaling.
Lower LED1: 19.2 mm above bottom. LED7 belongs to LOWER panel, 20 mm below top.
T-nut rows 6–7 remain 220 mm apart. Panel fastening holes are a separate schedule.

DEVELOPMENT REFERENCE — NOT RELEASED FOR CONSTRUCTION. Dimensions govern; do not scale or use as a drill template.

main_upper_left — HOLD / LED DRILLING

FRONT / CLIMBING FACE: left stays left. Drill perpendicular through panel toward rear; do not mirror.

TOP — width / height 1219.2 mm (48 in)

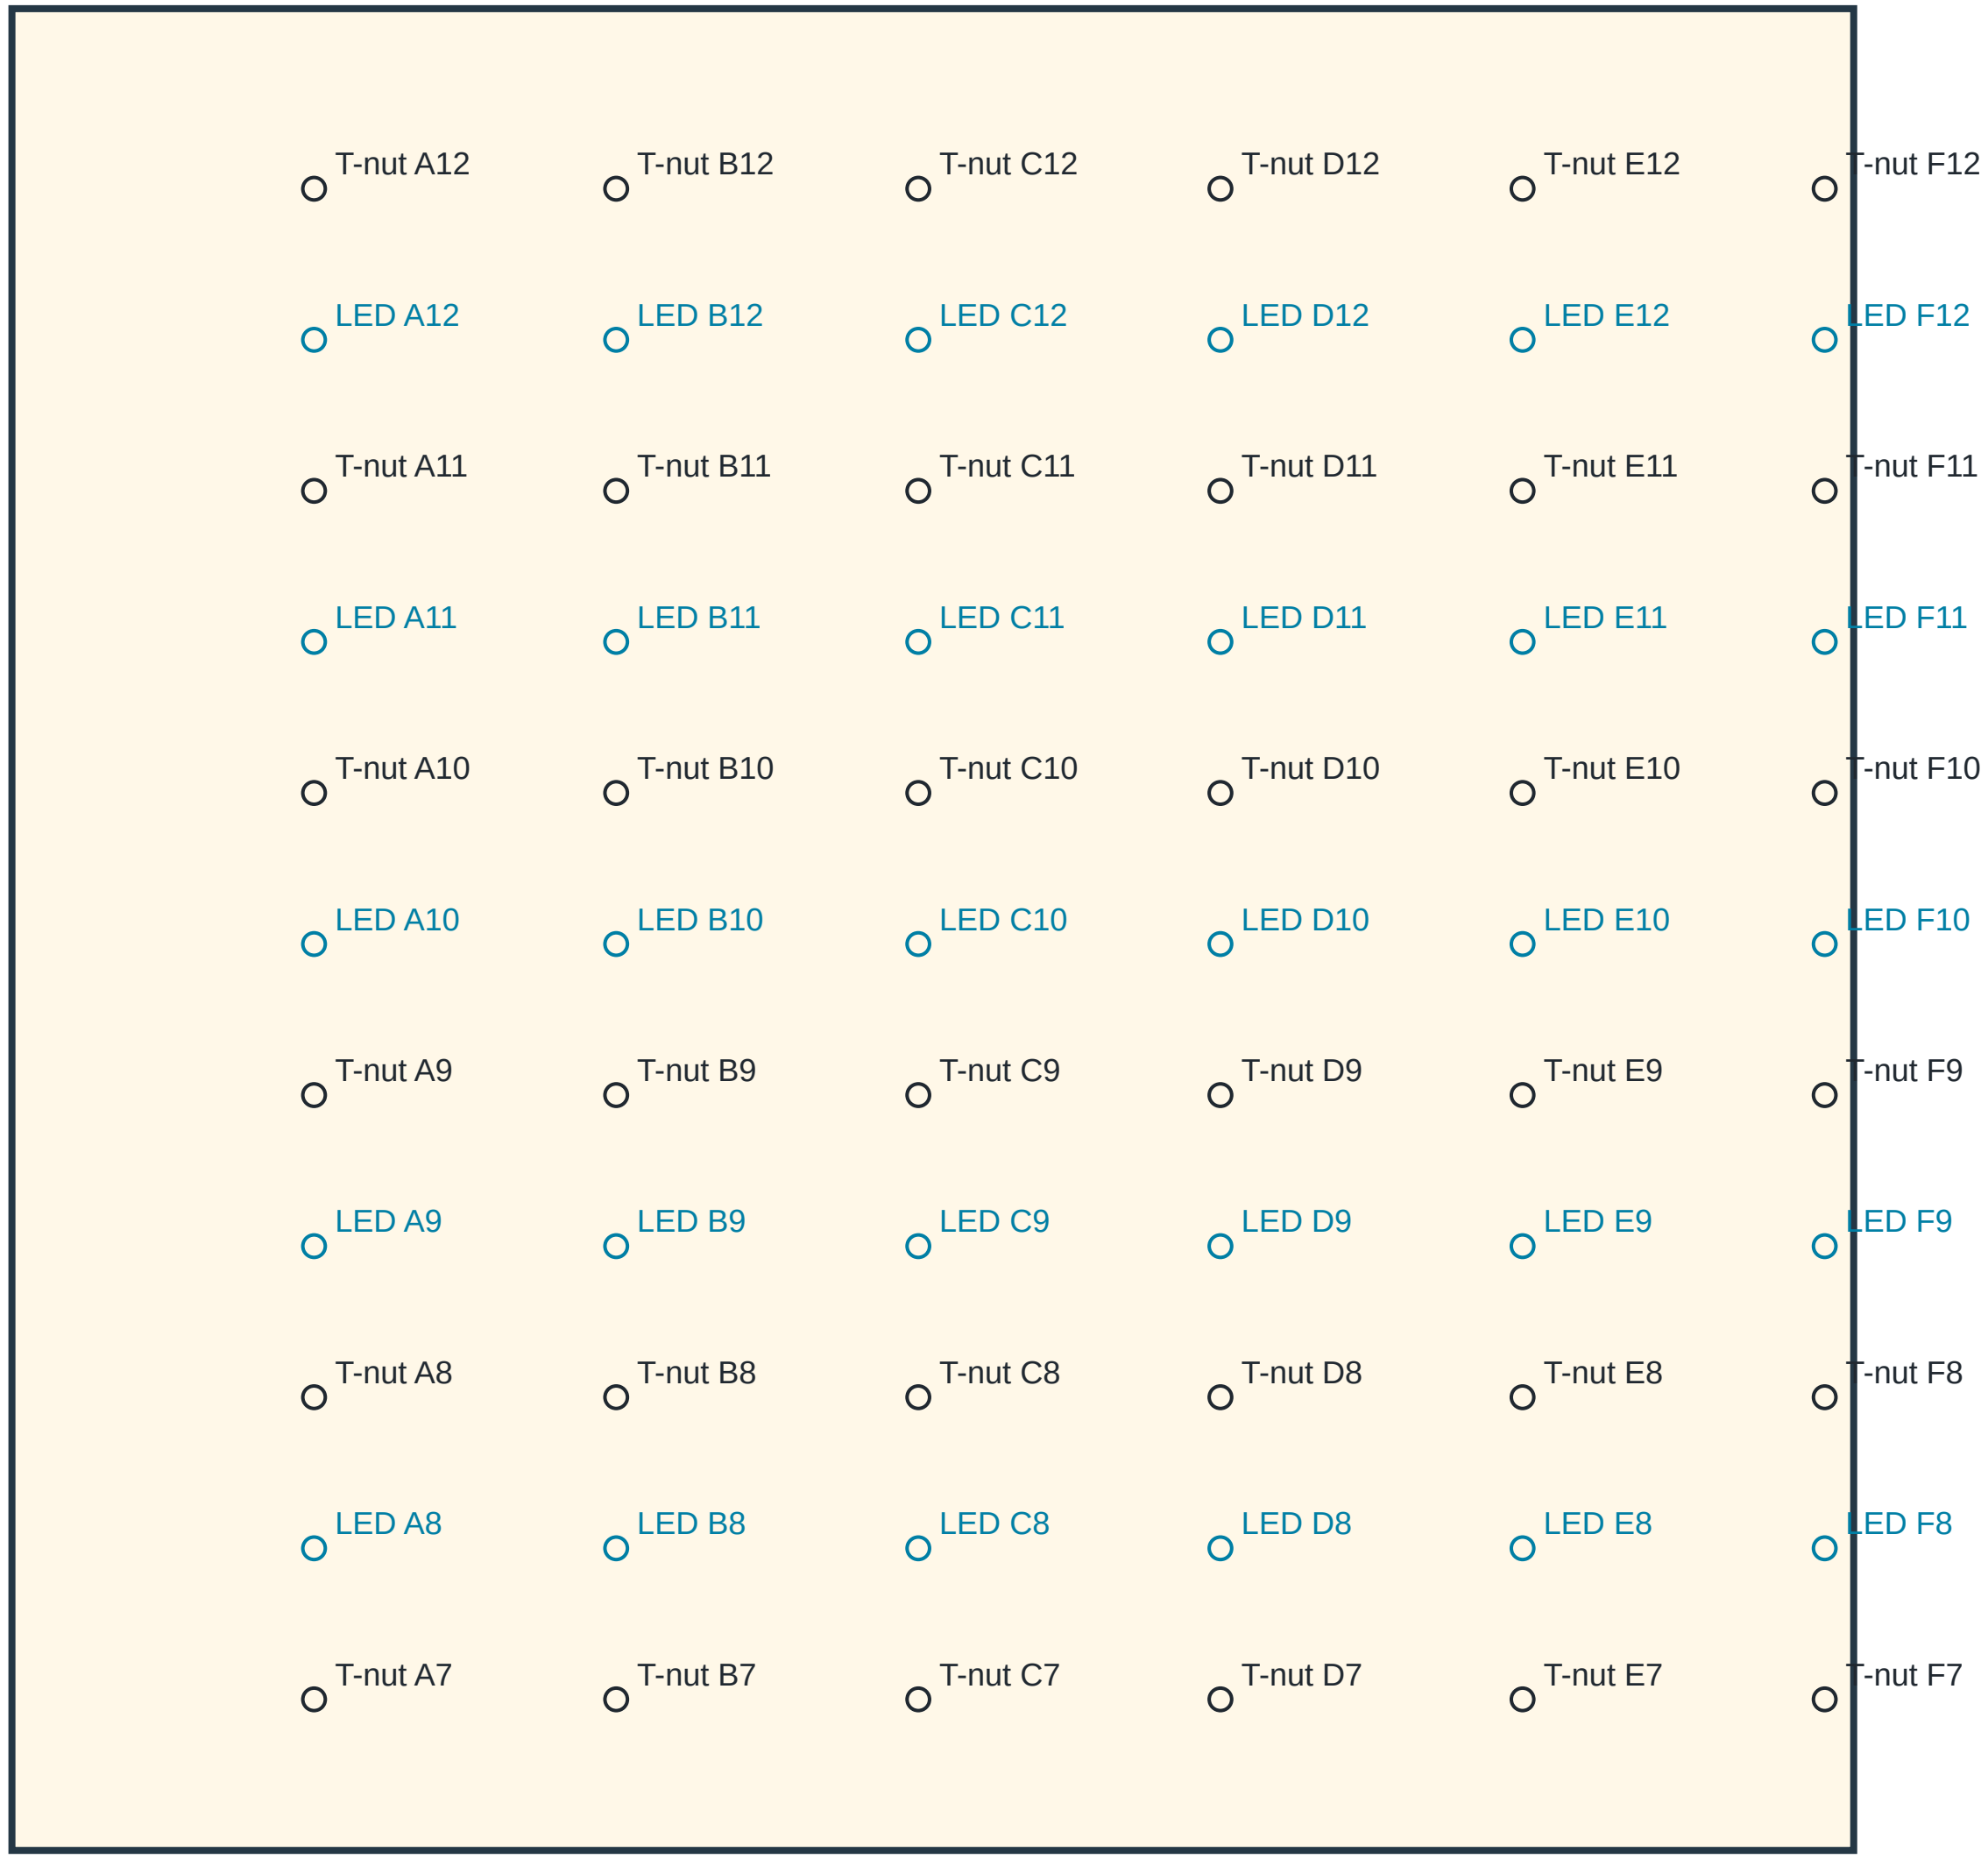

DATUM / DIRECTION
Measure from BOTTOM edge UP.
X: from this panel’s LEFT edge → RIGHT.
Black: T-nut bore Ø11.1125 mm (7/16 in).
Blue: LED bore Ø13.000 mm.
CAD diameters; verify actual purchased hardware.
No T-nut mounting-screw pilot schedule here.

COLUMN: distance from LEFT (mm)
A: 200.000
B: 400.000
C: 600.000
D: 800.000
E: 1000.000
F: 1200.000

ROW: BOTTOM edge → UP (mm)
T-nut 7: 100.000
LED 8: 200.000
T-nut 8: 300.000
LED 9: 400.000
T-nut 9: 500.000
LED 10: 600.000
T-nut 10: 700.000
LED 11: 800.000
T-nut 11: 900.000
LED 12: 1000.000
T-nut 12: 1100.000

1219.2 mm stock adaptation of nominal 1220 mm metric template; no scaling.
Lower LED1: 19.2 mm above bottom. LED7 belongs to LOWER panel, 20 mm below top.
T-nut rows 6–7 remain 220 mm apart. Panel fastening holes are a separate schedule.

DEVELOPMENT REFERENCE — NOT RELEASED FOR CONSTRUCTION. Dimensions govern; do not scale or use as a drill template.

main_upper_right — HOLD / LED DRILLING

FRONT / CLIMBING FACE: left stays left. Drill perpendicular through panel toward rear; do not mirror.

TOP — width / height 1219.2 mm (48 in)

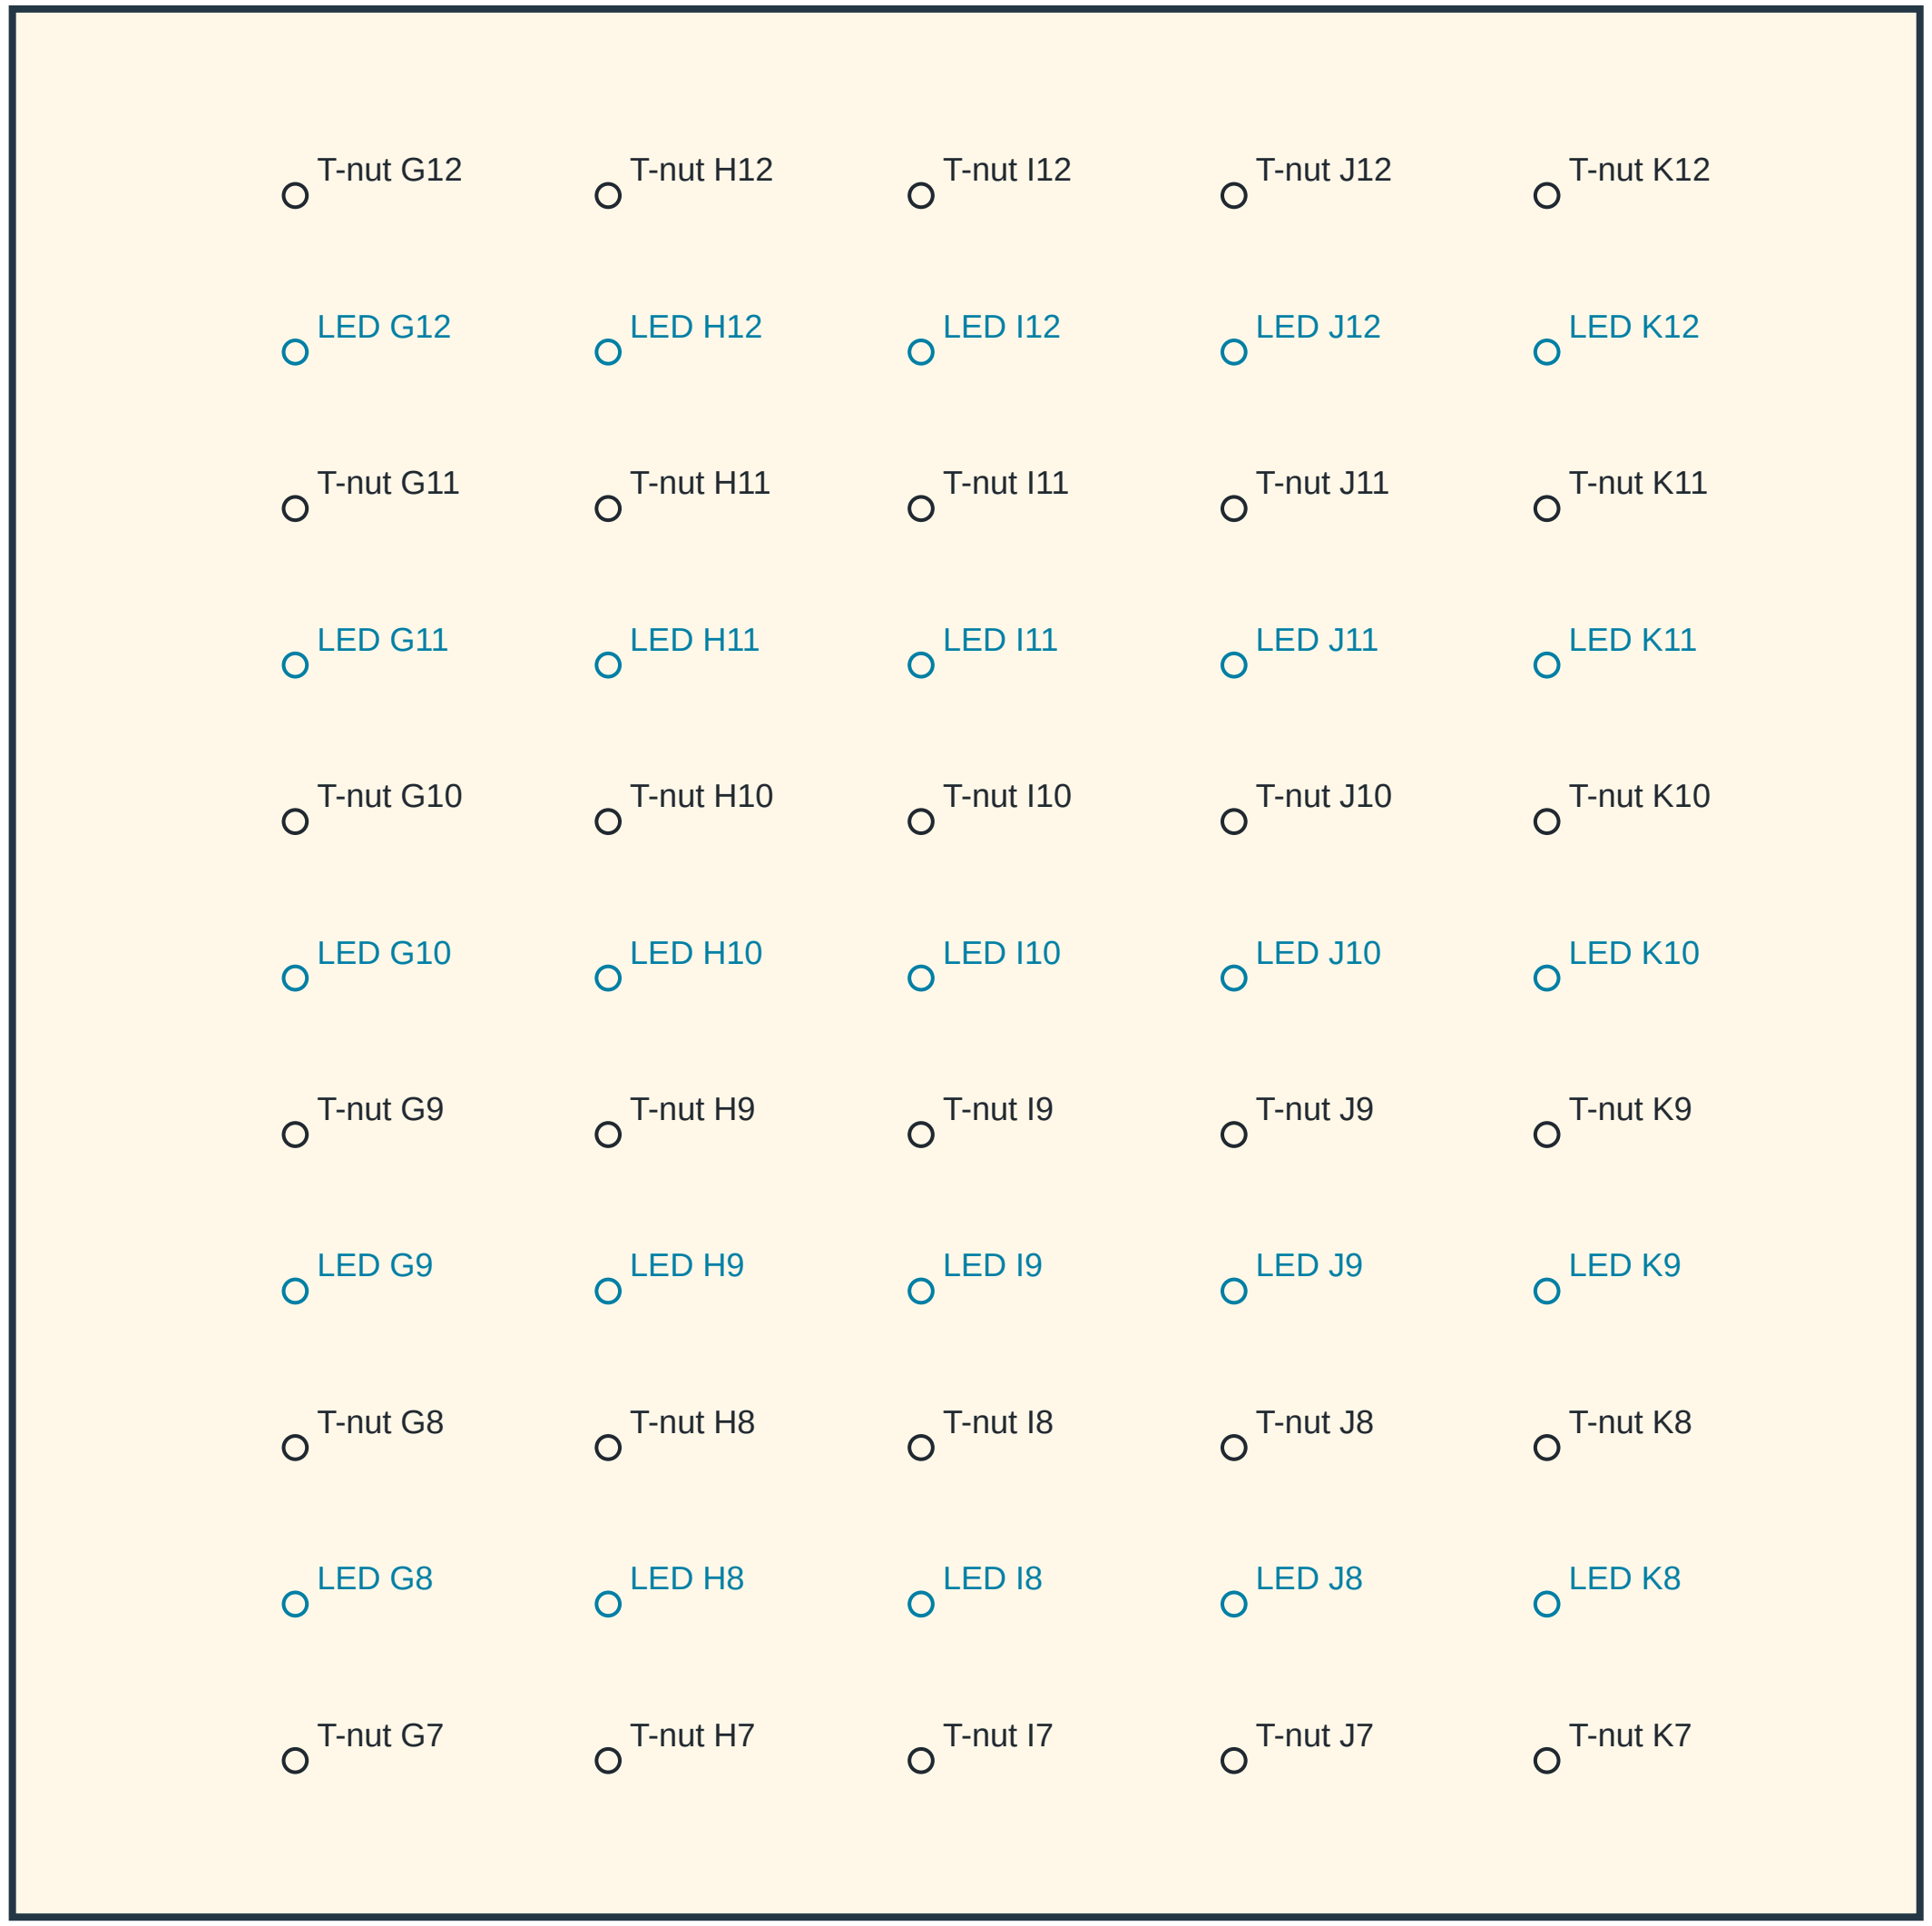

1219.2 mm stock adaptation of nominal 1220 mm metric template; no scaling.

Lower LED1: 19.2 mm above bottom. LED7 belongs to LOWER panel, 20 mm below top.

T-nut rows 6–7 remain 220 mm apart. Panel fastening holes are a separate schedule.

DATUM / DIRECTION

Measure from BOTTOM edge UP.

X: from this panel’s LEFT edge → RIGHT.

Black: T-nut bore Ø11.1125 mm (7/16 in).

Blue: LED bore Ø13.000 mm.

CAD diameters; verify actual purchased hardware.

No T-nut mounting-screw pilot schedule here.

COLUMN: distance from LEFT (mm)

G: 180.800

H: 380.800

I: 580.800

J: 780.800

K: 980.800

ROW: BOTTOM edge → UP (mm)

T-nut 7: 100.000

LED 8: 200.000

T-nut 8: 300.000

LED 9: 400.000

T-nut 9: 500.000

LED 10: 600.000

T-nut 10: 700.000

LED 11: 800.000

T-nut 11: 900.000

LED 12: 1000.000

T-nut 12: 1100.000

DEVELOPMENT REFERENCE — NOT RELEASED FOR CONSTRUCTION. Dimensions govern; do not scale or use as a drill template.

base_side_left — FOUR LEG-JOINT BORES

OUTER broad face, left side of assembled frame; drill +X, toward frame center.

Measure DOWN along grain from the TOP end.
Measure ACROSS from the named long edge:
panel-contact front edge.
Coordinates are per member; do not transfer a rim
pattern onto its leg or mirror the opposite side.
Nominal through clearance Ø11.1125 mm (7/16 in).
Complete member thickness: 38.1 mm (1.5 in).
Top/edge offsets below are hole CENTER distances.
Outer face: smaller X on LEFT; larger X on RIGHT.
Width arrow follows stated world axis; opposite
outer-face views have opposite handedness.

LOCAL AXIS PROJECTION / ENLARGED HOLE REGION

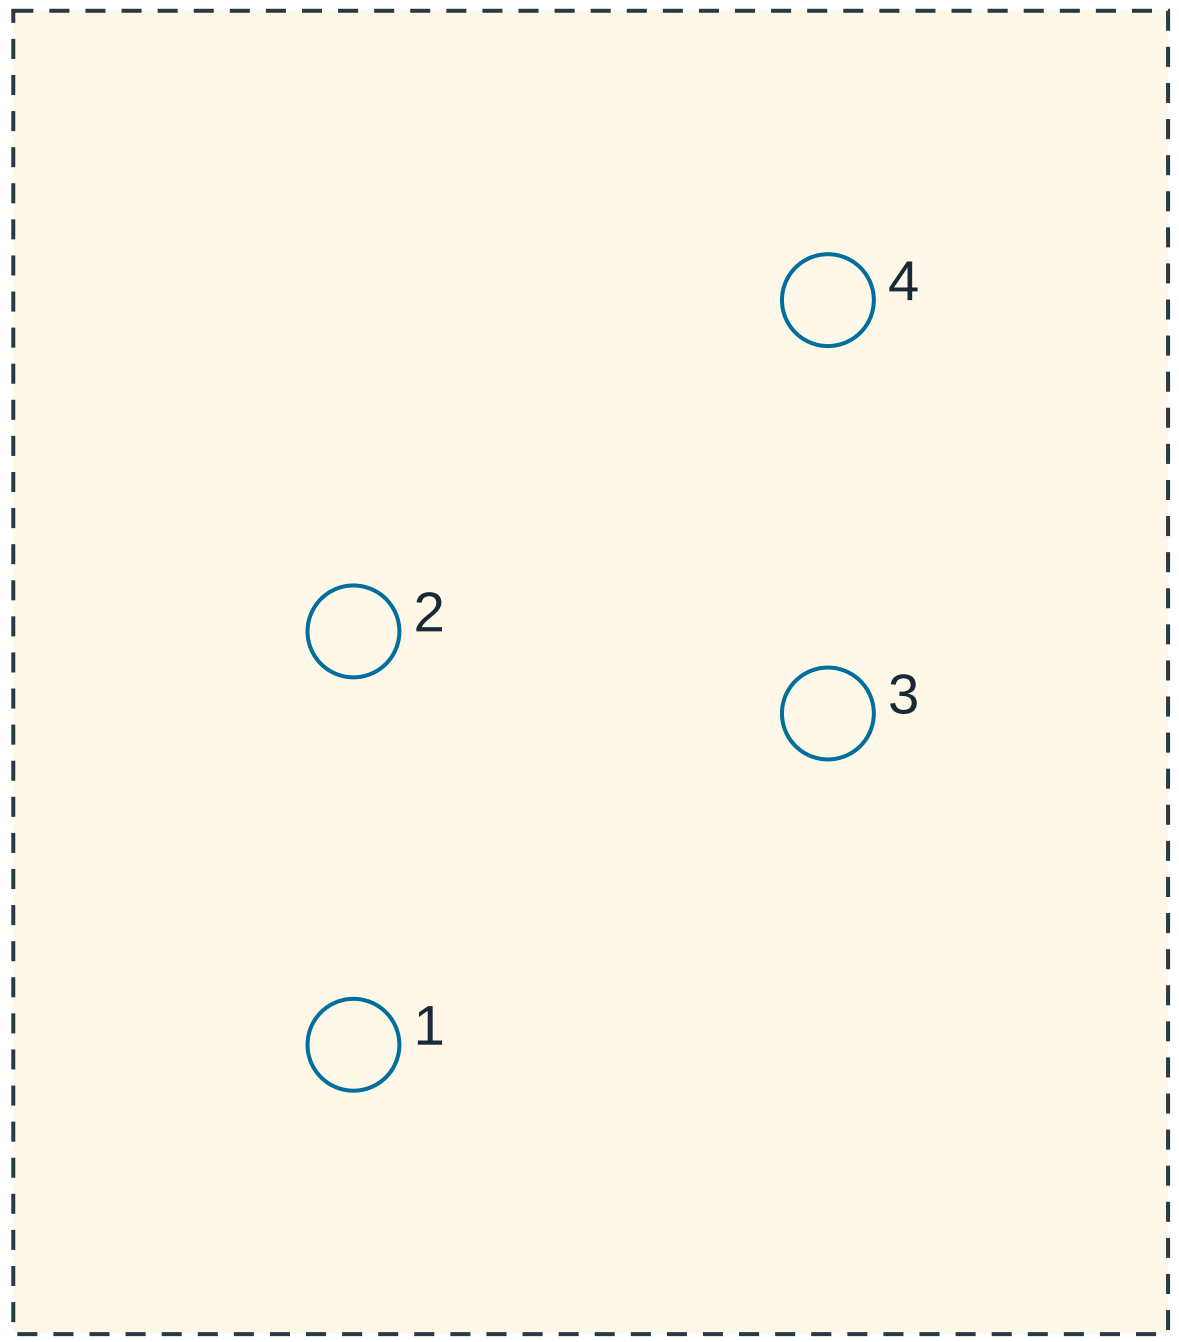

Width 139.700 mm; down-window starts 693.881 mm

HOLE /	CONNECTION	FROM TOP	FROM LONG EDGE	OPPOSITE EDGE	NEAREST END (mm)
1	lumber_leg_bolt_left_1	818.952	41.152	98.548	818.952
2	lumber_leg_bolt_left_2	768.952	41.152	98.548	768.952
3	lumber_leg_bolt_left_3	778.881	98.548	41.152	778.881
4	lumber_leg_bolt_left_4	728.881	98.548	41.152	728.881

DOWN unit vector, world XYZ: [-0.0, -0.642788, -0.766044]
WIDTH unit vector, world XYZ: [0.0, -0.766044, 0.642788]
Dashed region is a detail window, not stock ends. End distances follow grain at each bore.
These pages cover eight leg/rim bolt axes only. Panel screws are a separate schedule.

lumber_leg_left — FOUR LEG-JOINT BORES

OUTER broad face, left side of assembled frame; drill +X, toward frame center.

Measure DOWN along grain from the TOP end.
Measure ACROSS from the named long edge:
frontmost long edge (smaller world Y at a fixed leg station).
Coordinates are per member; do not transfer a rim
pattern onto its leg or mirror the opposite side.
Nominal through clearance Ø11.1125 mm (7/16 in).
Complete member thickness: 38.1 mm (1.5 in).
Top/edge offsets below are hole CENTER distances.
Outer face: smaller X on LEFT; larger X on RIGHT.
Width arrow follows stated world axis; opposite
outer-face views have opposite handedness.

LOCAL AXIS PROJECTION / ENLARGED HOLE REGION

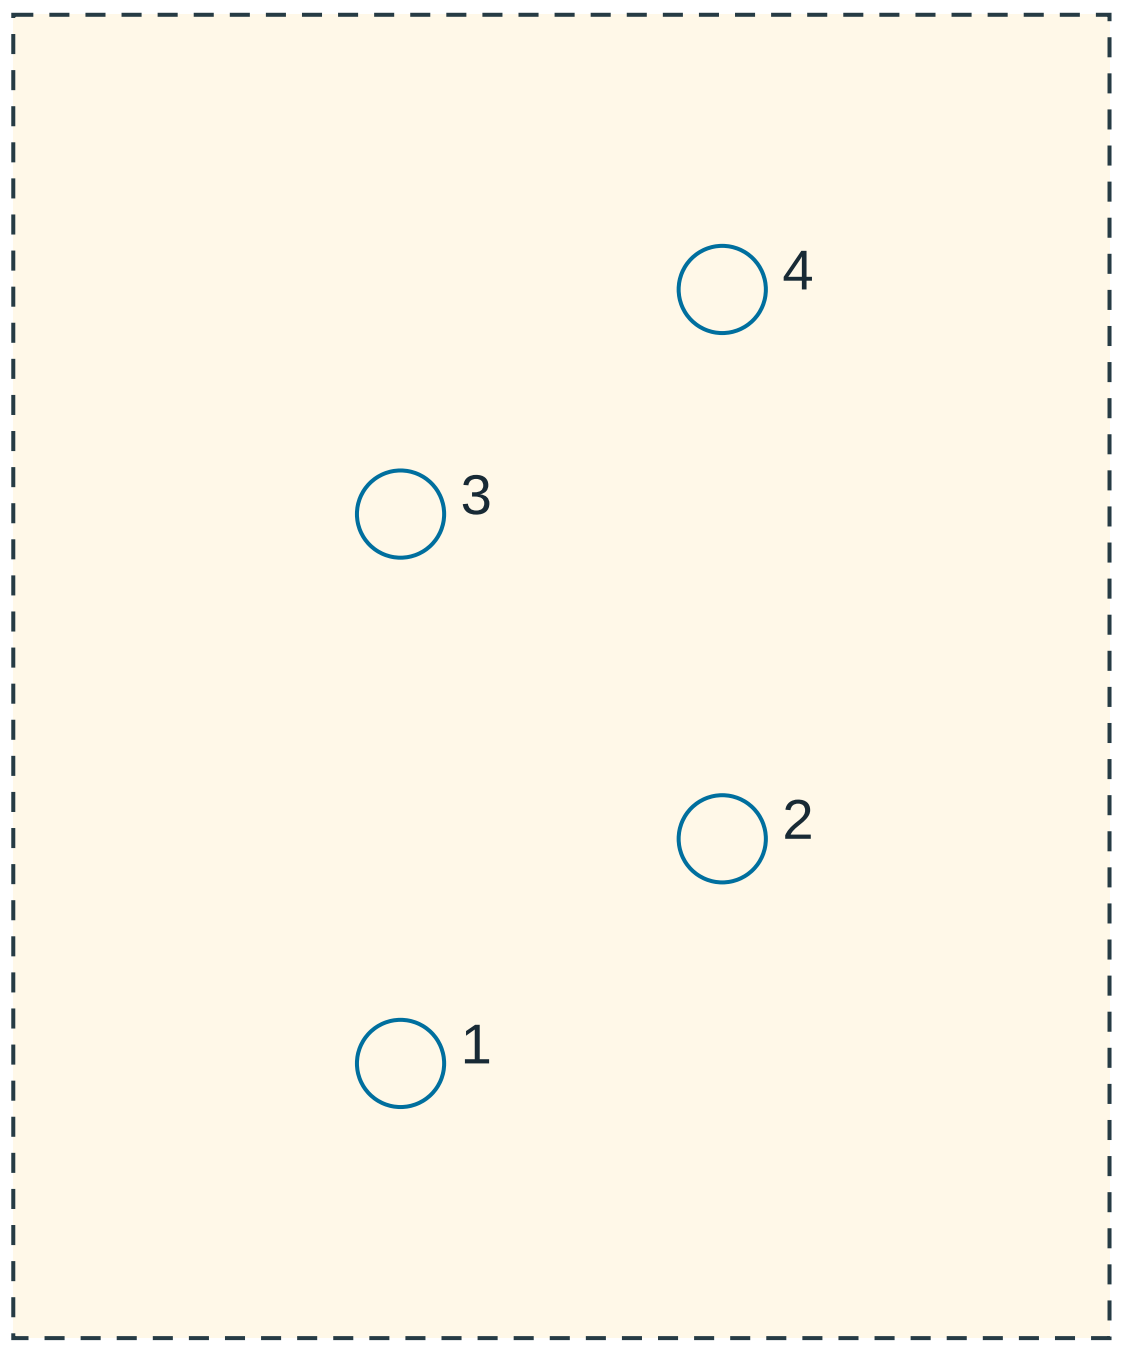

Width 139.700 mm; down-window starts 92.794 mm

HOLE / CONNECTION	FROM TOP	FROM LONG EDGE	OPPOSITE EDGE	NEAREST END (mm)
1 lumber_leg_bolt_left_1	226.416	49.351	90.349	226.416
2 lumber_leg_bolt_left_2	197.794	90.349	49.351	197.794
3 lumber_leg_bolt_left_3	156.416	49.351	90.349	156.416
4 lumber_leg_bolt_left_4	127.794	90.349	49.351	127.794

DOWN unit vector, world XYZ: [-0.0, 0.260157, -0.965566]

WIDTH unit vector, world XYZ: [0.0, 0.965566, 0.260157]

Dashed region is a detail window, not stock ends. End distances follow grain at each bore.

These pages cover eight leg/rim bolt axes only. Panel screws are a separate schedule.

base_side_right — FOUR LEG-JOINT BORES

OUTER broad face, right side of assembled frame; drill -X, toward frame center.

Measure DOWN along grain from the TOP end.
Measure ACROSS from the named long edge:
panel-contact front edge.
Coordinates are per member; do not transfer a rim
pattern onto its leg or mirror the opposite side.
Nominal through clearance Ø11.1125 mm (7/16 in).
Complete member thickness: 38.1 mm (1.5 in).
Top/edge offsets below are hole CENTER distances.
Outer face: smaller X on LEFT; larger X on RIGHT.
Width arrow follows stated world axis; opposite
outer-face views have opposite handedness.

LOCAL AXIS PROJECTION / ENLARGED HOLE REGION

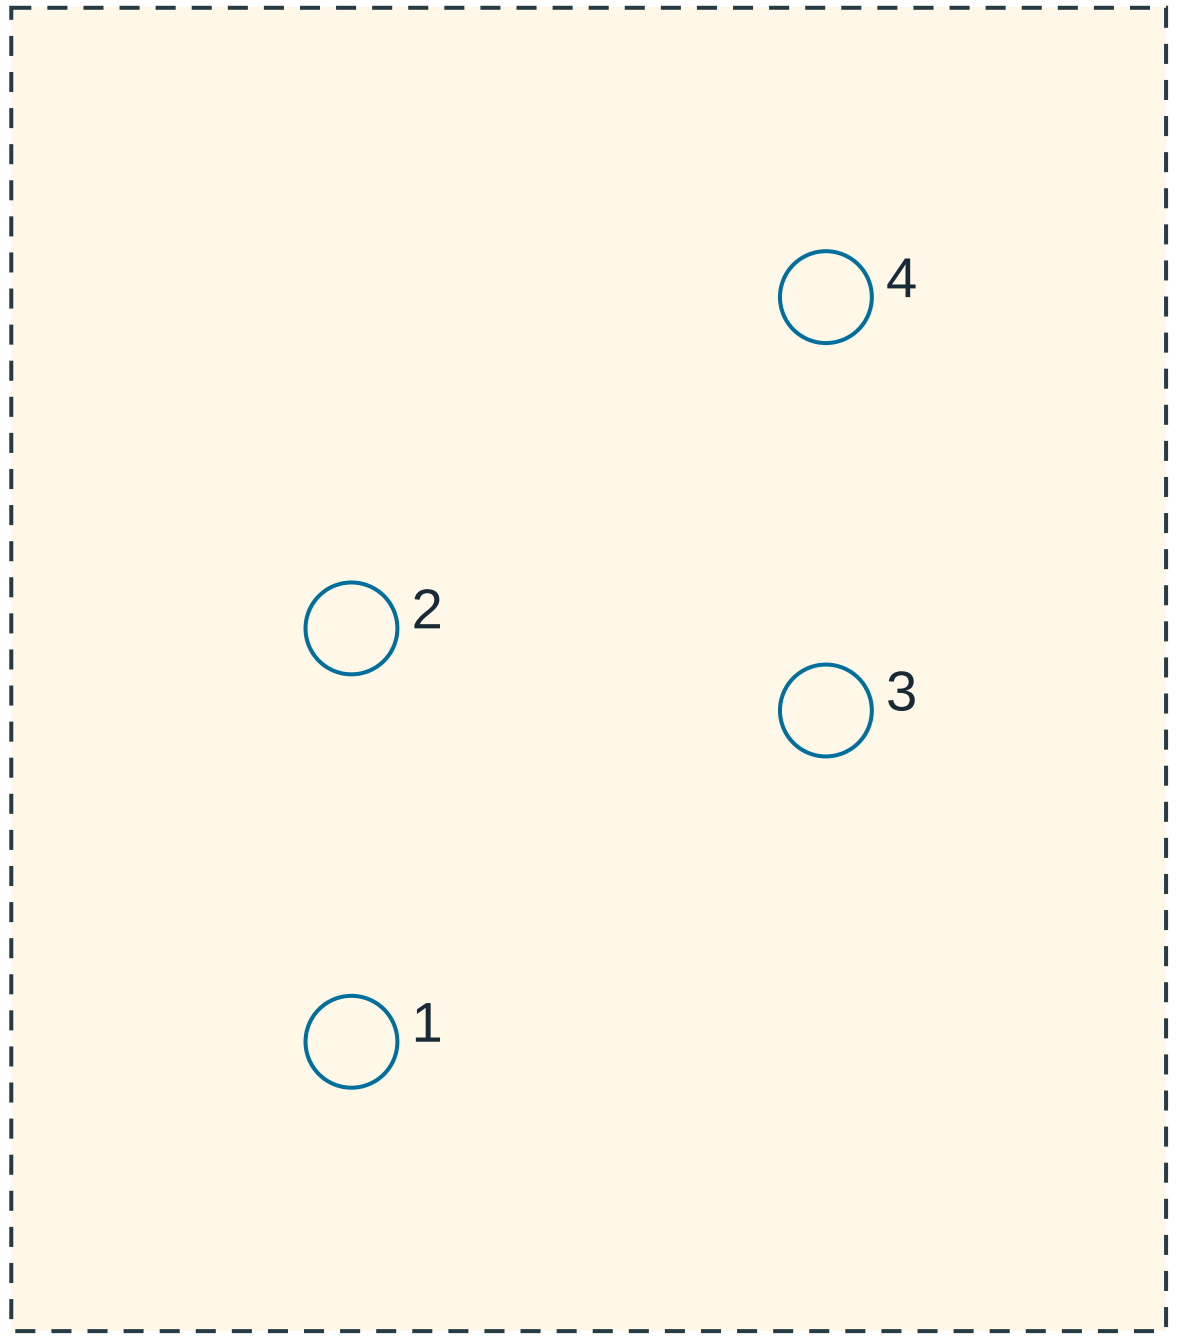

Width 139.700 mm; down-window starts 693.881 mm

HOLE / CONNECTION	FROM TOP	FROM LONG EDGE	OPPOSITE EDGE	NEAREST END (mm)
1 lumber_leg_bolt_right_1	818.952	41.152	98.548	818.952
2 lumber_leg_bolt_right_2	768.952	41.152	98.548	768.952
3 lumber_leg_bolt_right_3	778.881	98.548	41.152	778.881
4 lumber_leg_bolt_right_4	728.881	98.548	41.152	728.881

DOWN unit vector, world XYZ: [-0.0, -0.642788, -0.766044]

WIDTH unit vector, world XYZ: [0.0, -0.766044, 0.642788]

Dashed region is a detail window, not stock ends. End distances follow grain at each bore.

These pages cover eight leg/rim bolt axes only. Panel screws are a separate schedule.

DEVELOPMENT REFERENCE — NOT RELEASED FOR CONSTRUCTION. Dimensions govern; do not scale or use as a drill template.

lumber_leg_right — FOUR LEG-JOINT BORES

OUTER broad face, right side of assembled frame; drill -X, toward frame center.

Measure DOWN along grain from the TOP end.
Measure ACROSS from the named long edge:
frontmost long edge (smaller world Y at a fixed leg station).
Coordinates are per member; do not transfer a rim
pattern onto its leg or mirror the opposite side.
Nominal through clearance Ø11.1125 mm (7/16 in).
Complete member thickness: 38.1 mm (1.5 in).
Top/edge offsets below are hole CENTER distances.
Outer face: smaller X on LEFT; larger X on RIGHT.
Width arrow follows stated world axis; opposite
outer-face views have opposite handedness.

LOCAL AXIS PROJECTION / ENLARGED HOLE REGION

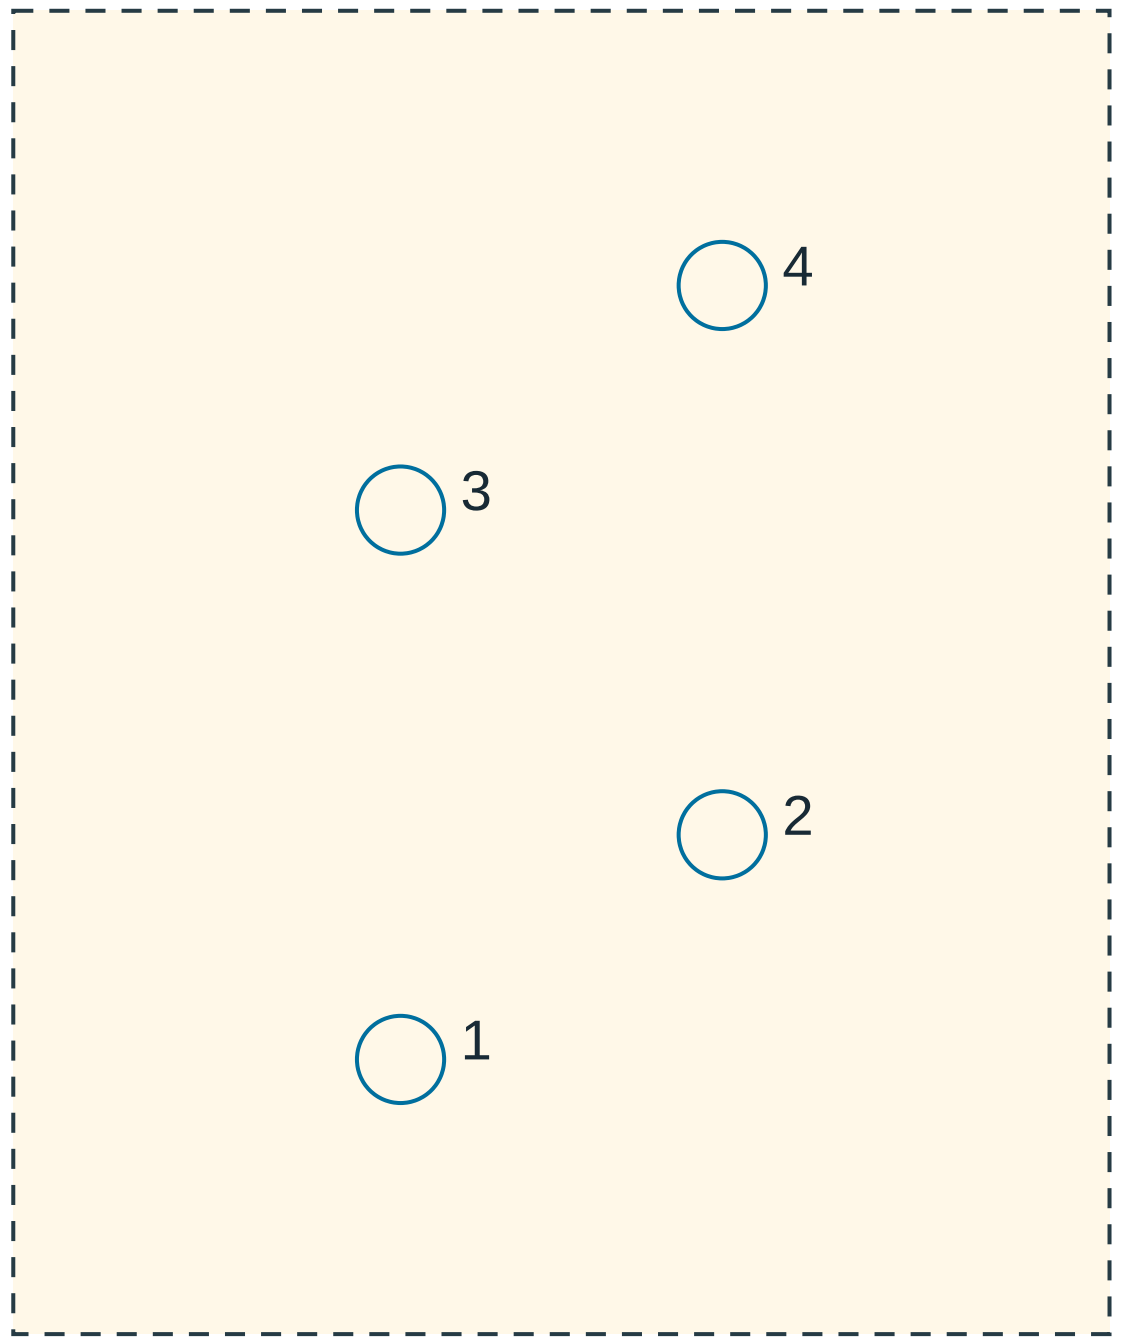

Width 139.700 mm; down-window starts 92.794 mm

HOLE	/ CONNECTION	FROM TOP	FROM LONG EDGE	OPPOSITE EDGE	NEAREST END (mm)
1	lumber_leg_bolt_right_1	226.416	49.351	90.349	226.416
2	lumber_leg_bolt_right_2	197.794	90.349	49.351	197.794
3	lumber_leg_bolt_right_3	156.416	49.351	90.349	156.416
4	lumber_leg_bolt_right_4	127.794	90.349	49.351	127.794

```
DOWN unit vector, world XYZ: [-0.0, 0.260157, -0.965566]
WIDTH unit vector, world XYZ: [0.0, 0.965566, 0.260157]
Dashed region is a detail window, not stock ends. End distances follow grain at each bore.
These pages cover eight leg/rim bolt axes only. Panel screws are a separate schedule.
```

base_principal_center_left / page 1 — OPEN-FRONT WIRING GROOVES

FRONT / CLIMBING FACE with panel removed. Width → RIGHT; length ↓ DOWN. Do not mirror.

TOP EDGE / LEFT EDGE origin — schematic aspect ratio; use table dimensions



Member front-face envelope: 38.100 mm across × 2532.626 mm down.

DEPTH: from panel-contact face N=0, perpendicular INTO timber (+N). Open grooves, NOT closed bores.

Place prewired harness into open face before fitting panel. No threading bulbs/connectors through timber.

CUT	LED SEGMENT	LEFT START–END (mm)	TOP START–END (mm)	DEPTH (mm)
1	E12 → F12	0.000– 38.100	177.000– 185.200	12.000

Owner bulb-base pitch ≈304.8 mm; cable diameter, body projection and bend radius remain unverified.

Channel sizes are provisional CAD cuts; remaining-section, fastener and actual harness fit checks still apply.

base_principal_center_right / page 1 — OPEN-FRONT WIRING GROOVES

FRONT / CLIMBING FACE with panel removed. Width → RIGHT; length ↓ DOWN. Do not mirror.

TOP EDGE / LEFT EDGE origin — schematic aspect ratio; use table dimensions



Member front-face envelope: 38.100 mm across × 2532.626 mm down.

DEPTH: from panel-contact face N=0, perpendicular INTO timber (+N). Open grooves, NOT closed bores.

Place prewired harness into open face before fitting panel. No threading bulbs/connectors through timber.

CUT	LED SEGMENT	LEFT START–END (mm)	TOP START–END (mm)	DEPTH (mm)
1	F1 → G1	0.000– 38.100	2377.000–2385.200	12.000

Owner bulb-base pitch ≈304.8 mm; cable diameter, body projection and bend radius remain unverified.

Channel sizes are provisional CAD cuts; remaining-section, fastener and actual harness fit checks still apply.

base_rail_bottom_left / page 1 — OPEN-FRONT WIRING GROOVES

FRONT / CLIMBING FACE with panel removed. Width → RIGHT; length ↓ DOWN. Do not mirror.

TOP EDGE / LEFT EDGE origin — schematic aspect ratio; use table dimensions

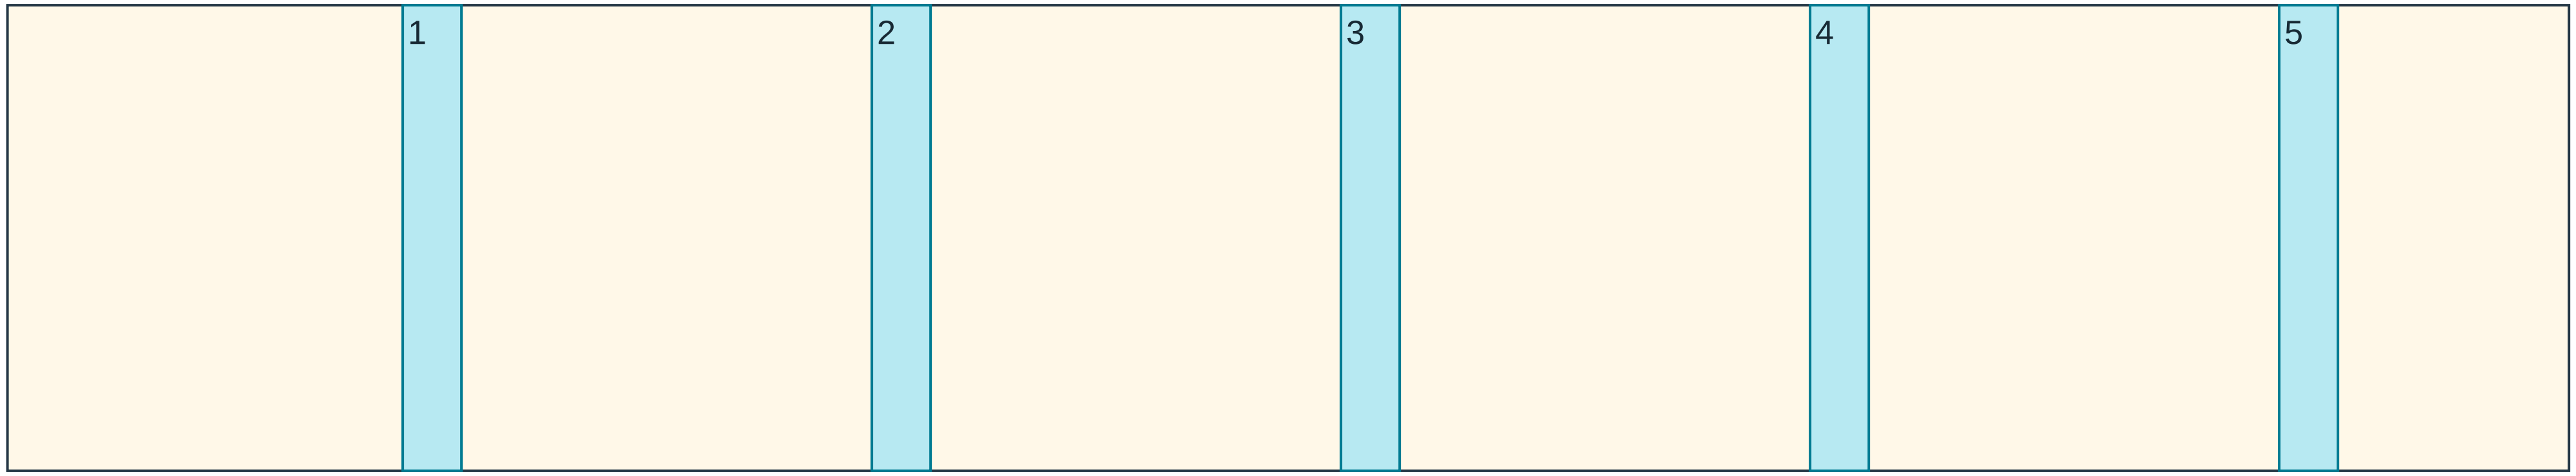

Member front-face envelope: 1092.050 mm across × 38.100 mm down.

DEPTH: from panel-contact face N=0, perpendicular INTO timber (+N). Open grooves, NOT closed bores.

Place prewired harness into open face before fitting panel. No threading bulbs/connectors through timber.

CUT	LED SEGMENT	LEFT START–END (mm)	TOP START–END (mm)	DEPTH (mm)
1	A1 → A2	168.507– 193.550	0.000– 38.100	12.000
2	B2 → B1	368.507– 393.550	0.000– 38.100	12.000
3	C1 → C2	568.507– 593.550	0.000– 38.100	12.000
4	D2 → D1	768.507– 793.550	0.000– 38.100	12.000
5	E1 → E2	968.507– 993.550	0.000– 38.100	12.000

Owner bulb-base pitch ≈304.8 mm; cable diameter, body projection and bend radius remain unverified.

Channel sizes are provisional CAD cuts; remaining-section, fastener and actual harness fit checks still apply.

DEVELOPMENT REFERENCE — NOT RELEASED FOR CONSTRUCTION. Dimensions govern; do not scale or use as a drill template.

base_rail_service_lower_left / page 1 — OPEN-FRONT WIRING GROOVES

FRONT / CLIMBING FACE with panel removed. Width → RIGHT; length ↓ DOWN. Do not mirror.

TOP EDGE / LEFT EDGE origin — schematic aspect ratio; use table dimensions

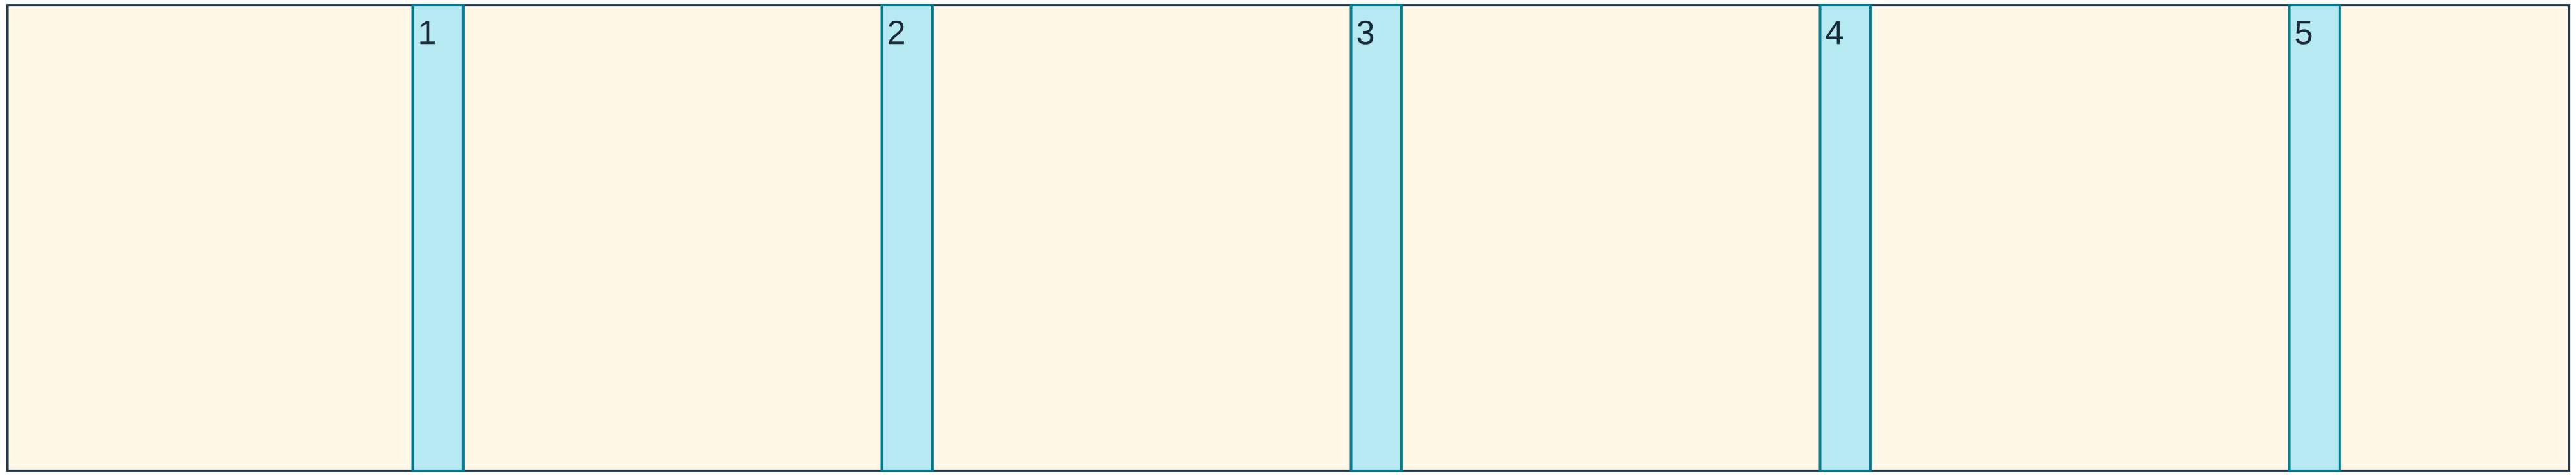

Member front-face envelope: 1092.050 mm across × 38.100 mm down.

DEPTH: from panel-contact face N=0, perpendicular INTO timber (+N). Open grooves, NOT closed bores.

Place prewired harness into open face before fitting panel. No threading bulbs/connectors through timber.

CUT	LED SEGMENT	LEFT START–END (mm)	TOP START–END (mm)	DEPTH (mm)
1	A6 → A7	172.754– 194.307	0.000– 38.100	12.000
2	B7 → B6	372.754– 394.307	0.000– 38.100	12.000
3	C6 → C7	572.754– 594.307	0.000– 38.100	12.000
4	D7 → D6	772.754– 794.307	0.000– 38.100	12.000
5	E6 → E7	972.754– 994.307	0.000– 38.100	12.000

Owner bulb-base pitch ≈304.8 mm; cable diameter, body projection and bend radius remain unverified.

Channel sizes are provisional CAD cuts; remaining-section, fastener and actual harness fit checks still apply.

DEVELOPMENT REFERENCE — NOT RELEASED FOR CONSTRUCTION. Dimensions govern; do not scale or use as a drill template.

base_rail_service_upper_left / page 1 — OPEN-FRONT WIRING GROOVES

FRONT / CLIMBING FACE with panel removed. Width → RIGHT; length ↓ DOWN. Do not mirror.

TOP EDGE / LEFT EDGE origin — schematic aspect ratio; use table dimensions

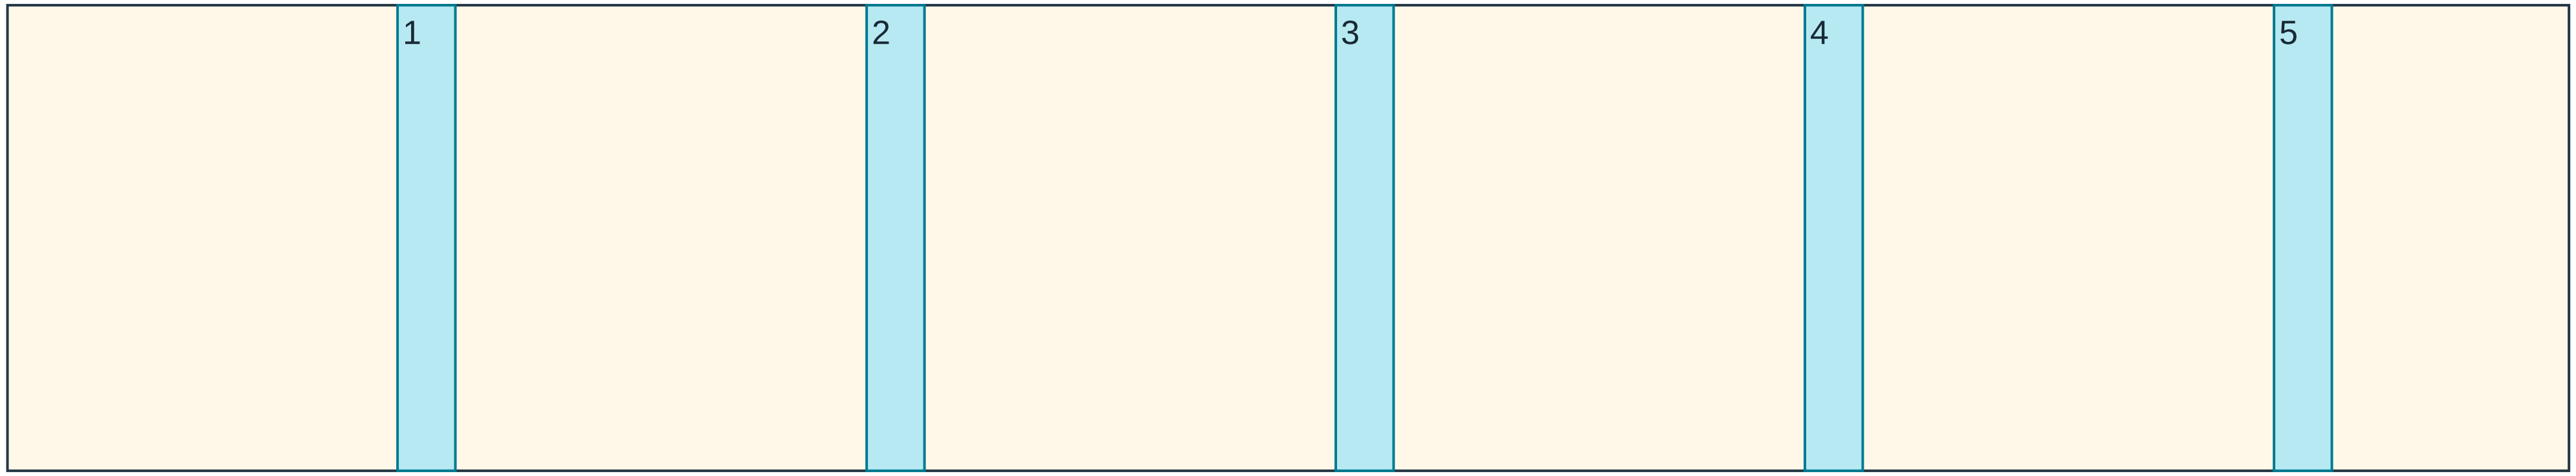

Member front-face envelope: 1092.050 mm across × 38.100 mm down.

DEPTH: from panel-contact face N=0, perpendicular INTO timber (+N). Open grooves, NOT closed bores.

Place prewired harness into open face before fitting panel. No threading bulbs/connectors through timber.

CUT	LED SEGMENT	LEFT START–END (mm)	TOP START–END (mm)	DEPTH (mm)
1	A7 → A8	166.296– 190.950	0.000– 38.100	12.000
2	B8 → B7	366.296– 390.950	0.000– 38.100	12.000
3	C7 → C8	566.296– 590.950	0.000– 38.100	12.000
4	D8 → D7	766.296– 790.950	0.000– 38.100	12.000
5	E7 → E8	966.296– 990.950	0.000– 38.100	12.000

Owner bulb-base pitch ≈304.8 mm; cable diameter, body projection and bend radius remain unverified.

Channel sizes are provisional CAD cuts; remaining-section, fastener and actual harness fit checks still apply.

base_rail_bottom_right / page 1 — OPEN-FRONT WIRING GROOVES

FRONT / CLIMBING FACE with panel removed. Width → RIGHT; length ↓ DOWN. Do not mirror.

TOP EDGE / LEFT EDGE origin — schematic aspect ratio; use table dimensions

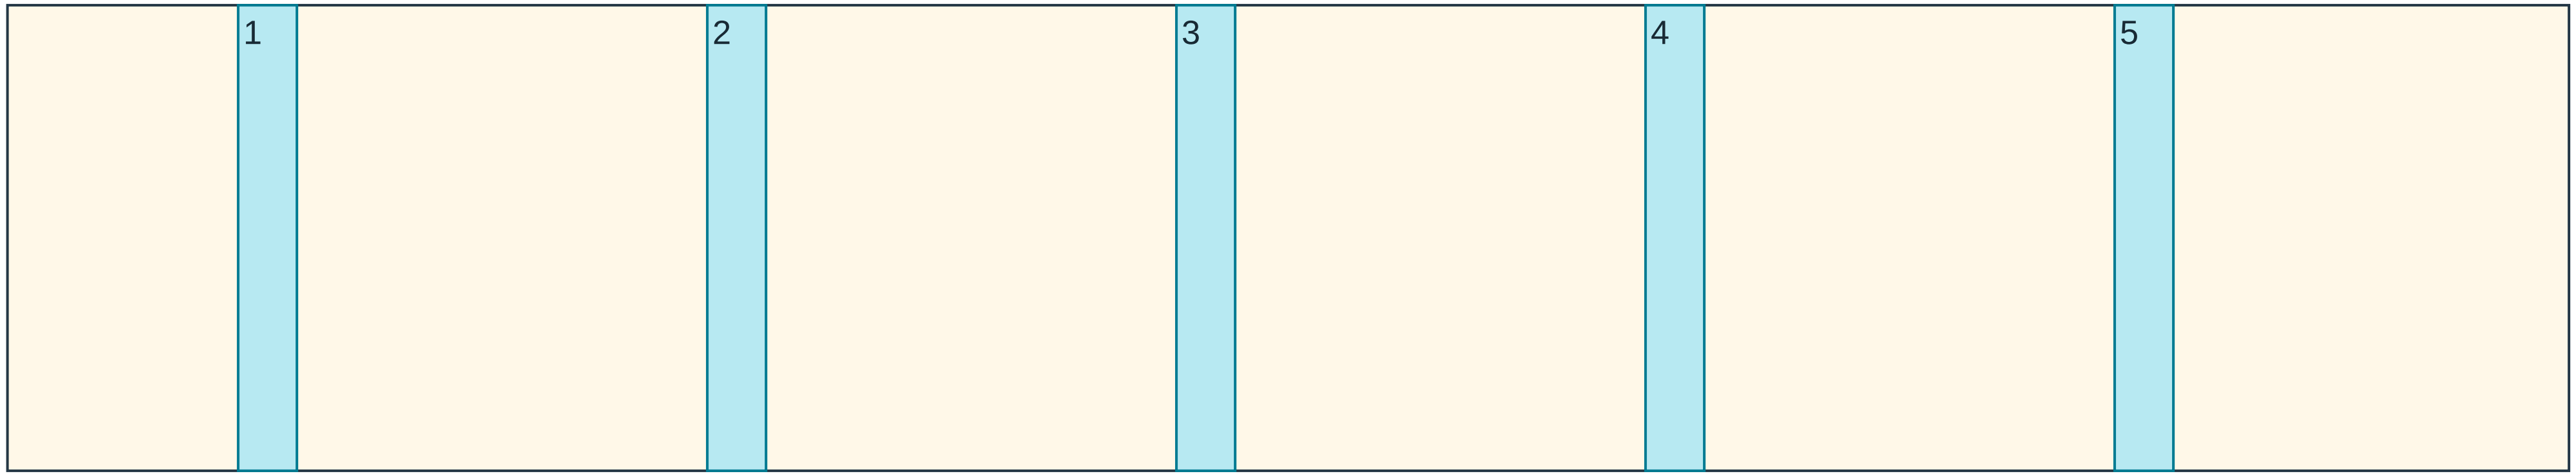

Member front-face envelope: 1092.050 mm across × 38.100 mm down.

DEPTH: from panel-contact face N=0, perpendicular INTO timber (+N). Open grooves, NOT closed bores.

Place prewired harness into open face before fitting panel. No threading bulbs/connectors through timber.

CUT	LED SEGMENT	LEFT START–END (mm)	TOP START–END (mm)	DEPTH (mm)
1	G1 → G2	98.357– 123.400	0.000– 38.100	12.000
2	H2 → H1	298.357– 323.400	0.000– 38.100	12.000
3	I1 → I2	498.357– 523.400	0.000– 38.100	12.000
4	J2 → J1	698.357– 723.400	0.000– 38.100	12.000
5	K1 → K2	898.357– 923.400	0.000– 38.100	12.000

Owner bulb-base pitch ≈304.8 mm; cable diameter, body projection and bend radius remain unverified.

Channel sizes are provisional CAD cuts; remaining-section, fastener and actual harness fit checks still apply.

DEVELOPMENT REFERENCE — NOT RELEASED FOR CONSTRUCTION. Dimensions govern; do not scale or use as a drill template.

base_rail_service_lower_right / page 1 — OPEN-FRONT WIRING GROOVES

FRONT / CLIMBING FACE with panel removed. Width → RIGHT; length ↓ DOWN. Do not mirror.

TOP EDGE / LEFT EDGE origin — schematic aspect ratio; use table dimensions

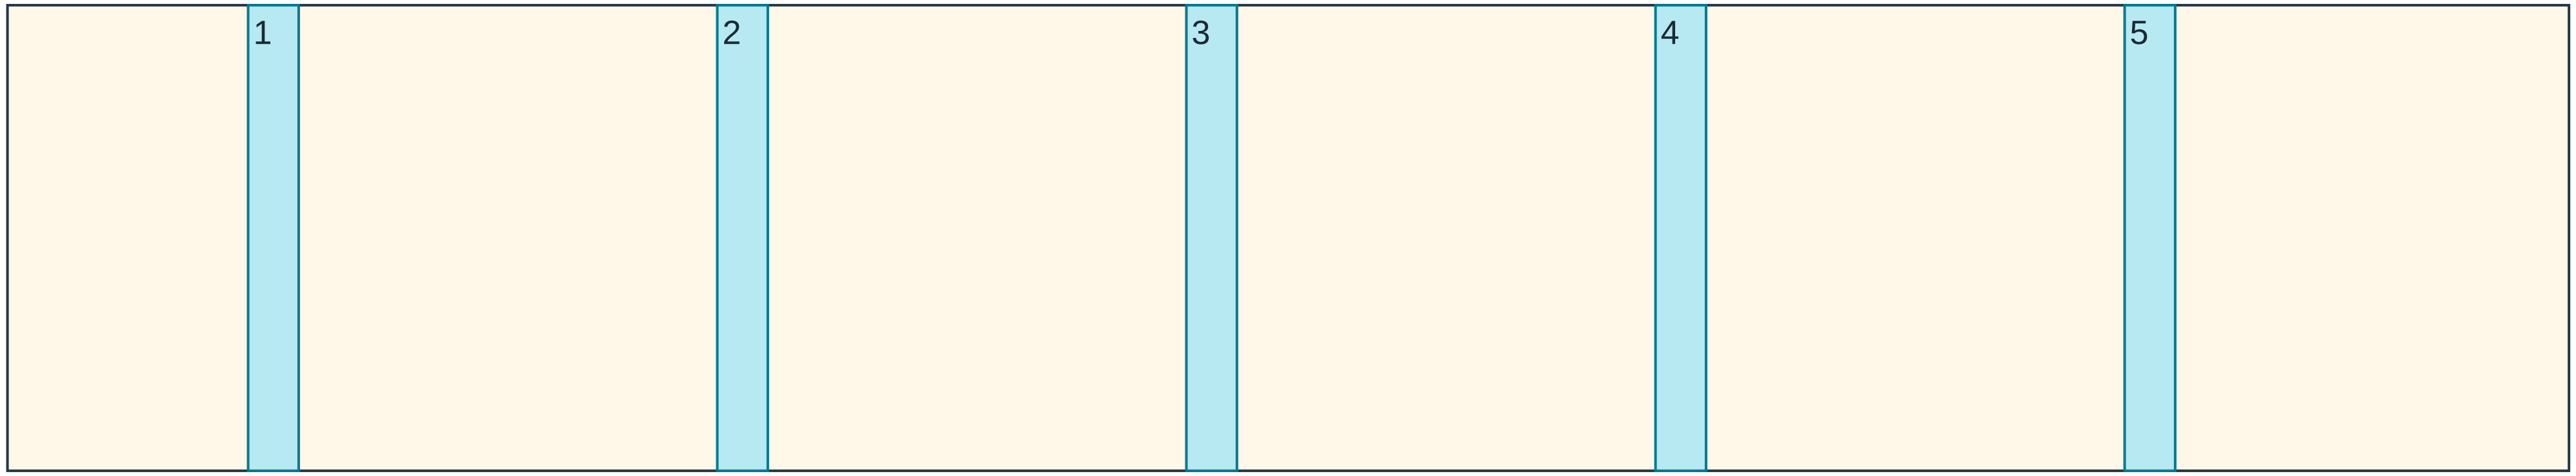

Member front-face envelope: 1092.050 mm across × 38.100 mm down.

DEPTH: from panel-contact face N=0, perpendicular INTO timber (+N). Open grooves, NOT closed bores.

Place prewired harness into open face before fitting panel. No threading bulbs/connectors through timber.

CUT LED SEGMENT LEFT START–END (mm) TOP START–END (mm) DEPTH (mm)

1 G6 → G7 102.604– 124.157 0.000– 38.100 12.000

2 H7 → H6 302.604– 324.157 0.000– 38.100 12.000

3 I6 → I7 502.604– 524.157 0.000– 38.100 12.000

4 J7 → J6 702.604– 724.157 0.000– 38.100 12.000

5 K6 → K7 902.604– 924.157 0.000– 38.100 12.000

Owner bulb-base pitch ≈304.8 mm; cable diameter, body projection and bend radius remain unverified.

Channel sizes are provisional CAD cuts; remaining-section, fastener and actual harness fit checks still apply.

base_rail_service_upper_right / page 1 — OPEN-FRONT WIRING GROOVES

FRONT / CLIMBING FACE with panel removed. Width → RIGHT; length ↓ DOWN. Do not mirror.

TOP EDGE / LEFT EDGE origin — schematic aspect ratio; use table dimensions

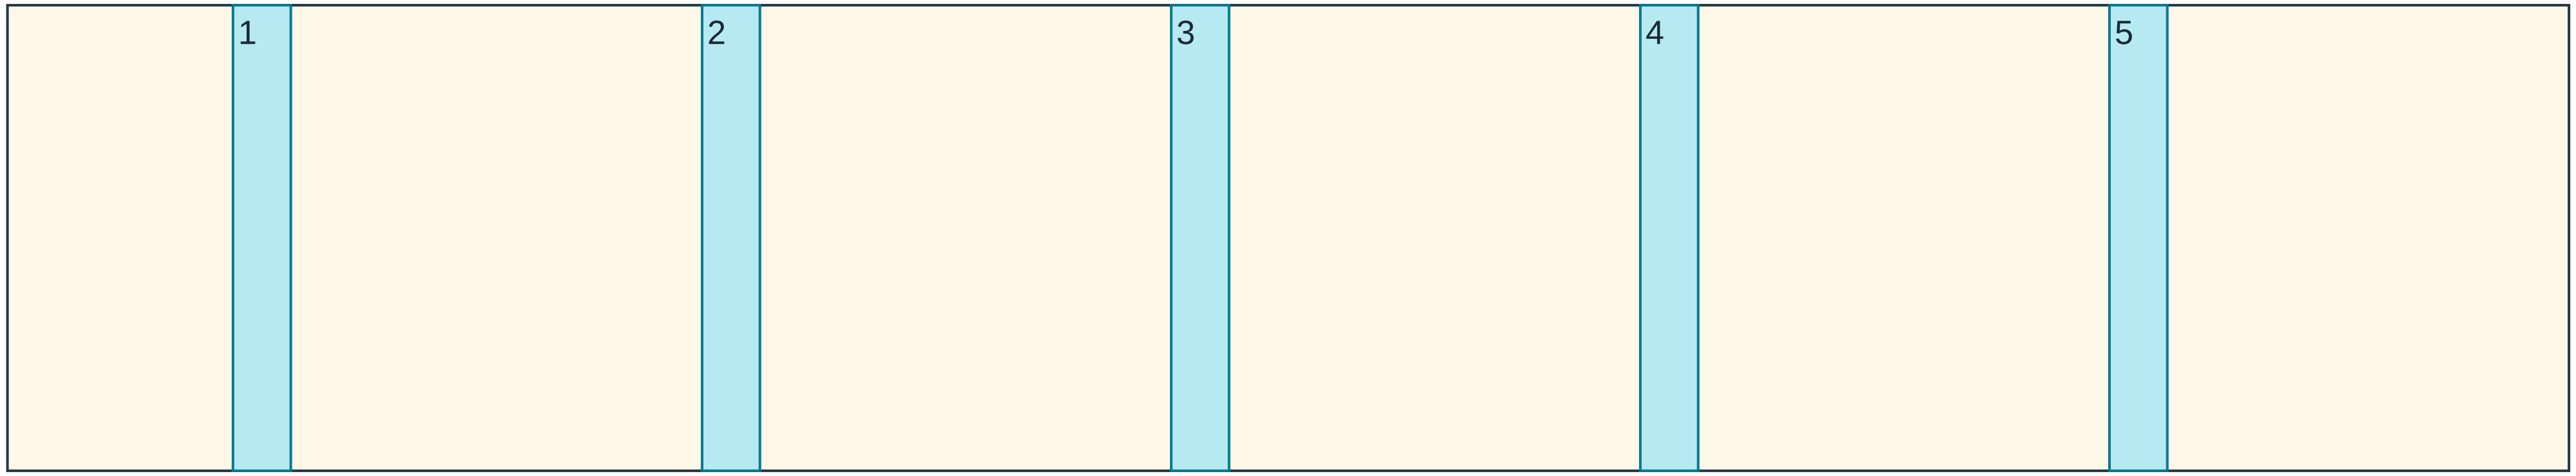

Member front-face envelope: 1092.050 mm across × 38.100 mm down.

DEPTH: from panel-contact face N=0, perpendicular INTO timber (+N). Open grooves, NOT closed bores.

Place prewired harness into open face before fitting panel. No threading bulbs/connectors through timber.

CUT	LED SEGMENT	LEFT START–END (mm)	TOP START–END (mm)	DEPTH (mm)
1	G7 → G8	96.146– 120.800	0.000– 38.100	12.000
2	H8 → H7	296.146– 320.800	0.000– 38.100	12.000
3	I7 → I8	496.146– 520.800	0.000– 38.100	12.000
4	J8 → J7	696.146– 720.800	0.000– 38.100	12.000
5	K7 → K8	896.146– 920.800	0.000– 38.100	12.000

Owner bulb-base pitch ≈304.8 mm; cable diameter, body projection and bend radius remain unverified.

Channel sizes are provisional CAD cuts; remaining-section, fastener and actual harness fit checks still apply.