


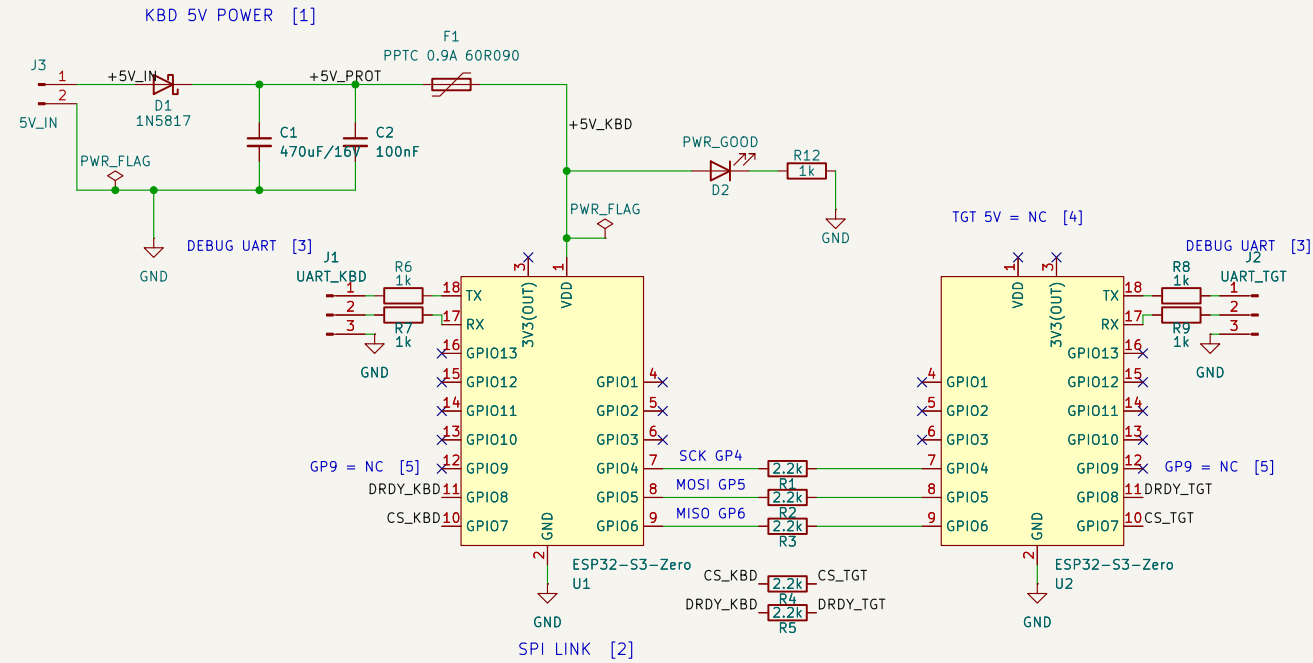

NOTES

- [1] Reverse-polarity D1 = 1N5817. Vf ~0.3 V at 0.3 A, so keyboard VBUS is ~4.6 V from a 5.00 V input (USB min 4.40 V).
Feed J3 from 5.1–5.25 V. A lower-Vf SB540 / SB560 fits the same pads with no respin. FR-010..FR-022
- [2] SPI = GP4..GP8, 2.2 k in series on every line. CS (GP7) and DATA_READY (GP8) use named nets because those pins sit on the outer edge of both modules. FR-002, FR-023
- [3] UART: 1 k in series on TX/RX, and no VCC pin, so a USB-UART adapter cannot back-power a module. FR-026, FR-031
- [4] TGT 5 V pin is deliberately unconnected. TGT is powered only by the target's USB. FR-012, FR-013
- [5] GP9 is unconnected on both modules. There is no board-level reset: flashing and reset use each module's own onboard BOOT + RESET buttons, which the layout must leave accessible with the modules seated. FR-030

Sheet: /
File: kbdrelay-carrier.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.5

Date:

Rev:

Id: 1/1