arbhar

_travelers guide
_for capturing stardust

88 grains	6 layers	10 s each

[shift] press [shift] hold › then noon = 12 o'clock cw / ccw = clockwise / counter

granular audio processor · two engines, 88 grains · six 10-second layers · onset capture

arbhar · 18 hp · firmware 2.0

rust = hold

01 capture — ar_01 · [capture]

[capture]	records from the start · again = stop · ● while on · survives power off
[capture] in	momentary: records while high · latching: rise on, rise off
[shift] [capture] + dub	ccw = momentary · cw = latching

03 layers — ar_03 · [layer]

α β γ δ ε ζ	six layers, 10 s each · picked per grain
Ω	fully cw: all six end to end, scan walks them
[shift] + layer	**record lock**: record ●, listen ● · Ω rejoins

02 accumulative — ar_02 · collage


[capture] + [shift]	on / off · capture pauses the head, no reset · ● pulses
paused 10 s	head goes back to the start
move head	double-tap-hold [shift] + [capture] = start · + [strike] = scan

04 two engines — ar_04 · 44 + 44 grains

[intensity]	noon = most · ccw = even, in time · cw = random, loose · ends = off
[strike]	one grain per press or pulse · 15% louder
per grain	settings lock as each grain starts

__fig.01 : one grain

window · direction · length



each grain takes its window, direction and length the moment it starts

05 grain shape — ar_05 · fig.01

[window]	noon = gaussian · ccw › square · cw › saw
[direction]	ccw = forward · noon = 50 / 50 · cw = reverse
[length]	4 ms to 3 s · noon = 750 ms · ccw end = wavetable

06 scan · spray — ar_06 · fig.04

[scan]	where grains start · park it to freeze
[scan] cv	±5 v · knob at noon = whole layer
[spray]	random offset ahead of scan, wraps · full = anywhere

07 pitch — ar_07

[pitch] [1v/oct]	per grain · 1v/oct ±5 v
[deviation]	ccw = random · noon = none · cw = quantised, wider each step
cw steps	–2/+1 · –1/+2 · –4/+3 · –3/+4 · –7/+5 · –6/+6 · –5/+7 · –9/+8 · –8/+9 · –11/+10 · –10/+11 · –12/+12 semitones · editable in preset.txt
track + hold	pitch snaps to semitones, layer LEDs show it

__fig.05 : onset modes

[shift] [capture] + layer

	onset starts recording	pulse out	onset LED
α	yes	trigger with every grain	● amber · off while held
β	yes	gate for the hold time	● amber
γ	–	grain triggers + a trigger per onset	○ white
δ	–	gate for the hold time, per onset	○ white
ε	–	trigger when strike is pressed	○ white
ζ	–	end of loop in follow mode	○ white

stereo input: α and β stop recording on onsets (they act like γ and δ, LED white)

11 wavetable — ar_11 · [length] fully ccw


[pitch]	noon = C2 · both direction LEDs ●
[scan] [spray]	pick the cycle · direction = morph speed
[intensity]	ends: silent, strike plays notes

12 mod cv — ar_12 · set in preset.txt

pan	+ = toward mono · – = random › fixed stereo
hold	adds to hold and the follow loop
reverb	+ = dry + verb, frozen at +5 v · – = wet shimmer
delay	+ = 80 ms–1 s echoes · – = 25–1 ms, karplus

__fig.04 : scan, spray, Ω

[scan] [spray]



scan sets the start · spray scatters ahead of it · at Ω the scan knob walks across all six layers

14 usb · presets — ar_14

folders	_arbhar_library · _arbhar_scenes · 36 slots each
preset.txt	in the root › loads, renamed preset_was_loaded
factory 1–6	classic · delay · stereo · follow · pan · accumulative

15 in · out — ar_15 · 18 hp · 48 khz

normals	mic › onset in › in
[in level]	10:00 ≈ unity · past it, analogue limiter
[shift] [capture] + window	ccw = mono in · cw = stereo, onset = right
[shift] [capture] + hold	ccw = out 2 inverted (mono) · cw = corrected

13 clone · load · save — ar_13

1	hold [shift] [capture] [strike] in order › menu (again = leave)
2	[capture] / [strike] turn pages: magenta + violet = layers · yellow + red = load scene · orange + green = save
3	layer knob = slot · past ζ, Ω ● = usb banks
4	double-tap [shift] = go · hold shift = preview

09 dub · undo · reset — ar_09

[dub]	ccw = replace · noon = old at half · cw = keep all
[shift] + [strike]	● flash = undo overdub · ● = erase layer
[shift] [capture] + [strike] ×7	factory reset, then reboot

10 follow mode — ar_10


[shift] [capture] + scan	ccw = follow, strike ● · cw = scan
[scan]	speed: 20× ccw to 1/20× cw, pitch stays
[capture] / [strike]	record + play / play, from the start
[hold]	loop length

08 onset — ar_08 · fig.05

[sense]	attack threshold · stereo: input 2 level
[hold]	5 ms–10 s, noon ≈ 2.5 s · min record or pulse gap · follow loop
[shift] [capture] + layer	onset mode α to ζ

__fig.03 : front panel

numbered as in the manual

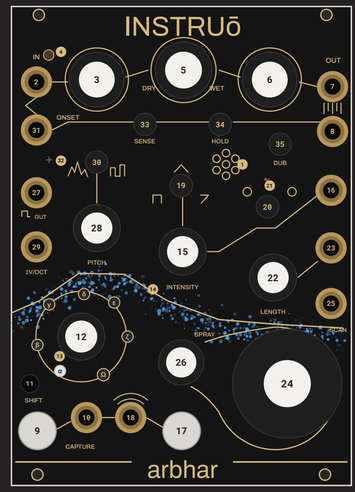

1 mic · feeds onset + in	13 layer LEDs · which layer	25 scan · cv ±5 v
2 in · audio, ac	14 stream · grains · colour	26 spray · scatter
3 in level · 10:00 = unity	15 intensity · how many	27 pulse out · +5 v
4 in LED · level	16 intensity · cv ±5 v	28 pitch · per grain
5 dry / wet · equal power	17 strike · one grain	29 1v/oct · ±5 v
6 out level	18 strike in · trig a grain	30 deviation · random pitch
7 out 1 · main	19 window · envelope	31 onset in · analysis
8 out 2 · normalled to 1	20 direction · fwd ‹› rev	32 onset LED · armed
9 capture · record	21 dir LEDs · fwd · rev	33 sense · threshold
10 capture in · gate · trig	22 length · 4 ms–3 s	34 hold · 5 ms–10 s
11 shift · second layer	23 length · cv ±5 v	35 dub · keep old audio
12 layer · α–ζ · Ω	24 scan · start · speed	

LED codes

stream	●●●●●● layer α–ζ · ● shift held · ● track + hold
capture	● recording · ● pulsing = accumulative pause · ● flash = pulse in
strike	● follow mode + shift ● undo · ● erase
direction	● continuous grain · ● strike grain · ●● wavetable
onset	● will record · ● won't · ○ waiting out hold
layer	● record lock · usb bank · ● listening · slot

design homage to the house of x / powers of x data pages — designed by tom muller with jonathan hickman
not affiliated with instruō or marvel