hermod+

_travelers guide
_for talking to machines

16 tracks · 8 cv + 8 midi | **16** sequences / project | **8+4** fx · mod lanes / track

[step] press **[step]** hold turn / push **[encoder]** **[pad]** 1 of 16
[tr 1]–**[tr 8]** track switches › then

modes: [step] · [effects] · [track] · [seq] · on air effects › **[note fx]** : arpeggiator · chance · echo · euclid · glide · harmonizer · hold* · randomizer · ratchet · register* · scale · swing **[cv fx]** : envelope · lfo **[converters]** : mod to note · note to cc **[note or cv]** : bernoulli* · filter · midi output* * = new in os 3.0 red = hold

01 anywhere — hrm_01

[tr 1–8]	select track
[play]	start / stop (stop returns to top)
[seq] + **[pad]**	launch that sequence
[seq] + **[play]**	restart every pattern player
[step] + **[rec]**	**on air**: pads become a keyboard
[play]	**bpm menu**: turn **[encoder]** for tempo, tap **[rec]** to tap tempo, sync input inside
[rec]	**record settings**
[step] **[effects]** …	hold any mode button to peek, release to return

02 recording — hrm_02

[rec]	arm overdub (default) on the selected track; starts with **[play]** or live while playing
[x] + **[rec]**	hard rec: overwrites old notes *
[y] + **[rec]**	looper rec: length set when you stop *
[x] **[y]** + **[rec]**	multitrack rec: all routed tracks *

* factory defaults. reassign: record settings › shortcut x / y / x+y — hard rec, multitrack, looper, punch-in or nothing.

03 power-on — hrm_03

[step] at boot	skip autoload, start a fresh project
[x] at boot	calibrate **[cv 1–8]** outputs (voltmeter; **[tr]** picks voice, **[x]** saves)
[y] at boot	auto-calibrate **[cv a–d]** inputs from **[cv 1]** (do outputs first)

_fig.01 : pad matrix — indexed 01–16

01	02	03	04
05	06	07	08
09	10	11	12
13	14	15	16

■ red = modmatrix attenuverter pads ([effects] › [y]) · [pad] n = sequence n (seq) or step n (step)

04 step · length / view — hrm_04

[x] / **[y]**	page right / left (pauses follow-playhead until you leave step)
[x] + turn **[encoder]**	zoom: /4, /2, 2/3, ×1, 3/2, ×2, ×4, ×8
[y] + turn **[encoder]**	pattern length, 16–256 steps
[y] + push+turn **[encoder]**	length in single 1/16 steps (polymeter)
[x] **[y]** + turn **[encoder]**	double / halve length
hold + turn **[encoder]**	rotate all events left / right

05 step · notes — hrm_05

[pad]	add / delete a note
turn **[encoder]**	set pitch for the next note
[pad] + turn **[encoder]**	edit note; push **[encoder]** cycles pitch › length › velocity
[pad] + push+turn **[encoder]**	fast scroll (pitch jumps octaves)
[pad] **[pad]**	hold several to edit a range together
[pad] + **[pad]**	copy a step, paste onto another
[pad] + **[tr 1–8]**	quick note length
[step] + turn → **[encoder]**	**row edit** on (one pitch per row); turn ← exits
[step] in row edit	cycle through pitches used in the pattern
[midi] / on air chord	play it, then **[pad]** drops the whole chord in (note learn)

06 step · mod / gate — hrm_06

[step]	toggle mod / gate tab
[step] + turn **[encoder]**	switch mod value ← → interpolation (off, lin, s, log, exp)
[pad] + turn **[encoder]**	offset that mod value / gate length
[tr] again	multi-voice layout: opens that voice's gate view

07 step · analyzer — hrm_07

hold **[step]** and press a track switch to show and edit that event lane:


[tr 1]	**[tr 2]**	**[tr 3]**	**[tr 4]**
notes	**pitchbend**	**aftertouch**	**sustain**
[tr 5]	**[tr 6]**	**[tr 7]**	**[tr 8]**
mod	**mod 2**	**mod 3**	**mod 4**

[step] + **[x]**	erase the shown lane in this pattern (row only, in row edit)
[step] + **[y]**	randomize the shown lane

08 track — hrm_08

[track] or turn **[encoder]**	flip cv tracks 1–8 ← → midi tracks 1–8
[pad]	mute track in this pattern
[track] + **[pad]**	mute track in all patterns
[x]	layout configurator (voices › layout)
[y]	global settings
push **[encoder]**	copy, paste, clear, rename track
[tr 1–8]	per-track config (see hrm_12)

_fig.02 : the orrery — mm_01

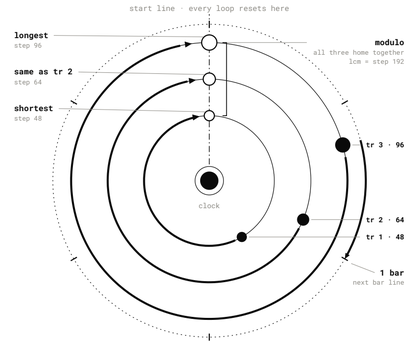

the first planet home launches it · modulo waits for all three

09 effects — hrm_09

empty **[pad]**	jump into "add effect"
filled **[pad]**	jump into "edit effect" (any pad exits)
[pad]	mute effect in this pattern
[effects] + **[pad]**	mute effect in all patterns
[effects] again	toggle parameter view ← → fx rack
[encoder] on slot	context menu: edit, copy, paste, delete (paste works track to track)
[encoder] on param	global value ← → **pattern-only value**
[y]	**modmatrix**, 4 lanes; **[pad]** picks a lane
[pad 2 · 6 · 10 · 14]	lane's attenuverter / polarity / offset (fig. 01)

10 seq — hrm_10

[pad]	launch sequence (waits for sync)
[x] + **[pad]**	append to song chain
[x] tap	clear the chain
[x] + turn **[encoder]**	sync: modulo, bars, shortest / longest, same as tr; push+turn **[encoder]** = step precise
[y] + turn **[encoder]**	run: sync / instant, restart / free
live **[pad]** + empty **[pad]**	duplicate the playing sequence
turn › push **[encoder]**	chain stopped: jump to any chain step
[seq] **[seq]**	straight to project save / load

11 on air — [step] + [rec] · hrm_11


turn **[encoder]**	lowest note on the pads
[x] / **[y]**	octave shift
[rec]	record what you play
mod track	pads become 16 fixed mod values
exit	**[step]** or any mode button

_fig.03 : front panel

01–11 = sections · 13–18 = hardware

[01] **_play :** hold play = bpm
[02] **_rec :** hold rec = rec settings
[03] **_x :** zoom, rack, voices, song
[04] **_encoder :** turn / push
[05] **_pad :** matrix, 16 pads
[06] **_cv 1–8 _gate 1–8**
[07] **_tr 1–8 :** track switches
[08] **_track**
[09] **_effects**
[10] **_seq**
[11] **_step**

[13] **_cv a–d :** ins · a/b, c/d
[14] **_usb device :** usb in
[15] **_usb host :** out
[16] **_midi :** in · out
[17] **_reset _clock :** outs
[18] **_y :** length, matrix, settings, run



_where things hide — 12 · hrm_12

global settings [track] › [y]

- **sync in** clock source, **[cv a–d]** reset / play / rec, clock div
- **sync out** clock + transport per port, **[reset]** mode, **[clock]** rate
- **midi in** active-track port / channel, filters, pc › seq
- **midi thru** port-to-port copies
- **cv/gate in** **[cv a–d]** routing, range, pitch offset
- **misc** autoload, leds, hold time, smart overdub, follow playhead
- **rec** same as hold **[rec]**
- **tuner** turn **[encoder]** to pick **[cv a–d]**
- **monitor** cv in › turn right: midi in › jitter
- **custom scales** 16 user scales for the scale effect
- **save** nothing above sticks until you save
- **info** os version, cpu / ram

quick routes

- **rec options** hold **[rec]**
- **tempo + sync** hold **[play]**
- **modmatrix** **[effects]** › **[y]**
- **voice layouts** **[track]** › **[x]**
- **hold threshold** **[track]** › **[y]** › misc
- **seq copy** **[seq]** › push **[encoder]** (across projects)

per-track config hold

[tr 1–8]

- **player** quantize, apply sustain, transpose, mute affects input
- **inputs** midi port + channel, mod cc, **[cv a–d]** note / mod in, generator trigs
- **outputs** midi port + channel, mod 1–4 / pitchbend / aftertouch destinations
- **cv** **[gate]** retrig, poly allocator, v/oct · 1.2 v · hz/v, finetune, bend range, **[cv]** min / max

transpose leader = tr8 midi, always. enable player › transpose on it, then on followers.

pattern edit [step] › push

[encoder]

- **copy / paste** whole track, or per lane (with page variants)
- **delete** per event lane
- **generator** randomize all, or just pitch / length / velocity
- **gen settings** grid, density, pitch / length / velocity ranges

projects [seq] › push [encoder]

- **save load** save, save as, new
- **load** delete lives in here. shortcut: **[seq]** **[seq]**
- **after load** **[y]** take its bpm · **[x]** keep current. swaps in sync, no stop.

hermod+

_travelers guide _for talking to machines

16 tracks · 8 cv + 8 midi | **16** sequences / project | **8+4** fx · mod lanes / track

[step] press **[step]** hold turn / push **[encoder]** **[pad]** 1 of 16
[tr 1]–**[tr 8]** track switches › then

modes: [step] · [effects] · [track] · [seq] · on air

effects › **[note fx]** : arpeggiator · chance · echo · euclid · glide · harmonizer · hold* · randomizer · ratchet · register* · scale · swing **[cv fx]** : envelope · lfo **[converters]** : mod to note · note to cc **[note or cv]** : bernoulli* · filter · midi output* * = new in os 3.0

red = hold

13 cv in · setup

hrm_13

[track] › **[y]** cv-gate in	**active track note**: cv/gate a+b or c+d → notes on the selected track, quantized c0–c10
same menu	**active track mod**: cv a–d → unquantized 16-bit mod. one input can't be note and mod at once
[tr 1–8] › inputs	per-track routing: **input note** a+b / c+d, **input mod** a–d. stays routed when the track isn't selected
cv a–d range	–5 › +5 (default) · 0 › +5 · –2.5 › +2.5 · –1 › +1. match your sequencer: **0 › +5** for 0 V-up pitch
gate capture	0–20 ms wait between gate and cv read. raise it if notes land wrong (slewed or gliding cv)
cv pitch offset	±60 st per input: puts the source on the right octave*

14 record a sequencer


hrm_14

[y] + turn **[encoder]**	in step: pattern length to match the sequencer's loop (see 04)
[rec]	overdub: keeps adding on every pass
[x] + **[rec]**	**hard rec**: replaces the selected track only. the way to swap a line
[y] + **[rec]**	**looper**: length is set when you stop — no step counting
[rec] punch in	waits for the first incoming note (note tracks only)
[tr] › player	**mute affects input** no = mute silences the recorded notes, the live sequencer still plays through

note track = quantized notes you can edit in step. 1 voice ► modulation + input mod = raw cv, keeps glides.

__fig.04 : the sequencer loop

patch



cv range to match the seq — 1 voice mono

15 seq · copy + vary

hrm_15

[pad] + empty **[pad]**	in seq: **duplicate the playing sequence**, every track (synced)
[encoder] in seq	copy / paste / clear a whole sequence, also across projects*
[tr 1] › **[x]** + **[rec]**	on the copy: re-record the sequencer track only
[step] + **[x]**	or wipe this pattern's shown events (e.g. notes), then overdub
[encoder] in step	copy / paste track: one lane, full length (or one event type / page)
[pad] in track	pattern mute: this sequence only
[encoder] on fx param	pattern value: an fx setting per sequence

seq n = pattern n of all 16 tracks.

16 chain sequences


hrm_16

[x] + **[pad]** …	queue in order; repeat a pad to repeat it: 1 · 1 · 2 · 1
[x] tap	erase the queue
[play]	the chain plays in a loop, following sync + run
turn › push **[encoder]**	chain stopped: start from any step*
[x] + turn **[encoder]**	sync: modulo · bars · shortest / longest · same as tr (push = step precise)
[y] + turn **[encoder]**	run: sync / instant · restart / free

[play] again resumes from the current sequence, not the top of the chain.

__fig.05 : the chain

seq mode

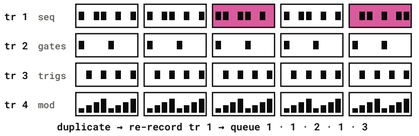

duplicate → re-record tr 1 → queue 1 · 1 · 2 · 1 · 3

pink = the lane you re-recorded · every other track rides along untouched

17 note fx

hrm_17

ARP **arpeggiator**	style · rate 1/1–1/64 · octave ±5 · gate 0–200% · re-trig (note / bars) · repeat x1–16. put **hold** first to run it hands-free
CHANCE **chance**	play / skip by %. **lot** rolls once per bar · beat · step group. chance = velocity: odds per note. **sync** + sync chance guard the downbeats
DELAY **echo**	note repeats: time · 0–16 · fade velocity / gate / pitch. pitch up and down both set = alternates
EUCLID **euclid***	steps + fills 1–32 · rate · rotate · reset. note input **in** = plays the held notes; a fixed note passes input on, so stack several for polymeters
GLIDE **glide***	linear · exp · smooth, 0–2500 ms then 3 – 60 s
HARMO **harmonizer**	adds up to 4 notes ±24 st. origin off drops the played note
HOLD **hold***	hold (toggle notes) or relatch (new chord each gesture) · max notes · reset
RANDOM **randomizer**	note ±12 · octave ±5 · velocity · length · chance per note
RATCHET **ratchet**	splits each note at rate · gate · mod amount / speed stretch and shrink lengths
REGISTR **register***	turing-style: seed · rate · bits 2–16 · chaos (0 / 100% = locked) · center · span · steady. re-seeds on unmute
SCALE **scale**	color › scale · key · stick up / down / filter / odd · trsp ±36 before correcting. after random sources
SWING **swing**	groove 50% = straight · sync (1/16 classic) · accent · human

order matters: arp › harmonizer ≠ harmonizer › arp. two of the same effect is fine.

__fig.06 : one modmatrix lane

effects › y



pad 2 · 6 · 10 · 14 open lanes 1–4 · the dot shows where the source sits

cv ranges per input: settings › cv-gate in

18 cv fx

hrm_18

ENV **envelope**	ahdsr + curves · depth · offset. mode gate on / trig / wait ahd · sidechain any or one note · dest mod 1–4 / pb / at / cc
LFO **lfo**	sine · tri · ramp · square · rand. sync 1/64–128/1 or free 0.1 Hz – ~1 kHz · range ±100% (– inverts) · offset · phase · mute w/ track*
dest mod	layout 2 voices ► mono + modulation: comes out the 2nd voice cv; its gate is still free
mute / delete	sends the default: envelope = offset, lfo = centre
zipper noise	on a fast vca: slew it, or a ~1.5–2 kHz low-pass (1 kΩ + 100 nF)

20 modmatrix · patch tips

hrm_20

[effects] › **[y]**	4 lanes per track: cv a–d, cc 1–119 or recorded mod 1–4 → any fx parameter
[pad 2 · 6 · 10 · 14]	attenuverter ±100% · polarity · offset. it **adds** to the parameter, you can still turn it
ride → replay	record a knob or cv as mod 1–4, it drives the fx per pattern
self-patch	lfo / envelope out a mod voice → cv c → modmatrix → another effect's parameter
self-patch	a spare gate out → gate a–d set as **trig generator** (**[tr]** › inputs): new pattern every hit · **trig generator mod** = new mod lane, notes kept*

19 convert · route

hrm_19


TO NOTE **mod to note**	cv / cc → notes. sϬh on note-on or every 1/64–1/1 · note min / max · mono track · only while playing
TO CC **note to cc**	note / velocity / on-off → a cc · default value when idle · pass notes
FILTER **filter**	passes a note or mod range; min above max blocks it instead
BERNOU **bernoulli***	coin-flips each event to midi path a or b by %
OUT **midi output***	taps the chain mid-way to a midi port. before a harmonizer = plain notes out, chords on cv

__fig.03 : front panel

01–11 = sections · 13–18 = hardware

[01] __play : hold play = bpm
[02] __rec : hold rec = rec settings
[03] __x : zoom, rack, voices, song
[04] __encoder : turn / push
[05] __pad : matrix, 16 pads
[06] __cv 1–8 __gate 1–8
[07] __tr 1–8 : track switches
[08] __track
[09] __effects
[10] __seq
[11] __step

[13] __cv a–d : ins · a/b, c/d
[14] __usb device : usb in
[15] __usb host : out
[16] __midi : in · out
[17] __reset __clock : outs
[18] __y : length, matrix, settings, run



_where things hide

12 · hrm_12

global settings [track] › [y]

- **sync in** clock source, **[cv a–d]** reset / play / rec, clock div
- **sync out** clock + transport per port, **[reset]** mode, **[clock]** rate
- **midi in** active-track port / channel, filters, pc › seq
- **midi thru** port-to-port copies
- **cv/gate in** **[cv a–d]** routing, range, pitch offset
- **misc** autoload, leds, hold time, smart overdub, follow playhead
- **rec** same as hold **[rec]**
- **tuner** turn **[encoder]** to pick **[cv a–d]**
- **monitor** cv in › turn right: midi in › jitter
- **custom scales** 16 user scales for the scale effect
- **save** nothing above sticks until you save
- **info** os version, cpu / ram

quick routes

- **rec options** hold **[rec]**
- **tempo + sync** hold **[play]**
- **modmatrix** **[effects]** › **[y]**
- **voice layouts** **[track]** › **[x]**
- **hold threshold** **[track]** › **[y]** › misc
- **seq copy** **[seq]** › push **[encoder]** (across projects)

per-track config hold

[tr 1–8]

- **player** quantize, apply sustain, transpose, mute affects input
- **inputs** midi port + channel, mod cc, **[cv a–d]** note / mod in, generator trigs
- **outputs** midi port + channel, mod 1–4 / pitchbend / aftertouch destinations
- **cv** **[gate]** retrig, poly allocator, v/oct · 1.2 v · hz/v, finetune, bend range, **[cv]** min / max

transpose leader = tr8 midi, always. enable player › transpose on it, then on followers.

pattern edit [step] › push

[encoder]

- **copy / paste** whole track, or per lane (with page variants)
- **delete** per event lane
- **generator** randomize all, or just pitch / length / velocity
- **gen settings** grid, density, pitch / length / velocity ranges

projects [seq] › push [encoder]

- **save load** save, save as, new
- **load** delete lives in here. shortcut: **[seq]** **[seq]**
- **after load** **[y]** take its bpm · **[x]** keep current. swaps in sync, no stop.