source ..... make noise · soundhack
rev ..... 2026.10

# mimeophon _travelers guide _for copying time

| 8 zones | 41.8 s longest repeat | 1.3 ms shortest |
|---|---|---|

› then  noon = 12 o'clock  tags = the panel drawing

stereo multi-zone colour audio repeater · karplus to flange to echo to 41 s loops · by tom erbe

## 01 what it is

mp_01

| | |
|---|---|
| a repeater | stereo · from karplus and flange to chorus, echo and 41 s loops · no modes |
| always writing | input goes into every zone at once · bigger zones dig up older sound |
| everything talks | repeats, color and halo share one feedback network |

## 02 zones

mp_02 · fig.01

| | |
|---|---|
| 0 – 1 | microsound: stutter, flange, karplus-strong, distortion · 1.3 – 82 ms |
| 2 – 4 | delay and echo · 82 ms – 1.3 s |
| 5 – 7 | phrases and loops · up to 41.8 s in zone 7 |
| switching | no pitch swoop · neighbours overlap 50 % and stay in time |

### __fig.01 : zones


zone knob




every zone records at once · smaller zones nest inside bigger ones

### __fig.04 : rate per zone

manual p.11 · log time

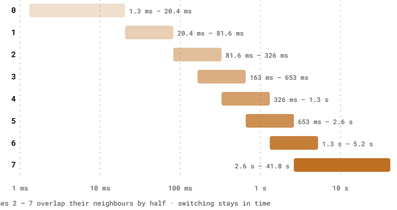


zones 2 – 7 overlap their neighbours by half · switching stays in time

### __fig.07 : input gain

flip + hold




mix fully dry · hold flip + hold to cycle · release to keep

boosting can clip modular-level signals · unity suits most

## 03 rate · skew

mp_03

| | |
|---|---|
| rate | repeat size inside the zone · smooth, with doppler when repeats are up |
| [ skew ] | lit: rate pushes L and R apart · press again: locks the spread |
| clear skew | turn skew on then off with rate unmodulated |
| [ skew ] | not skewed = ping pong (inputs summed) · skewed = swap L/R feedback · window flashes |
| µ | doppler only · same small range in every zone · 1 V/oct in zone 0 |

## 04 repeats · color · halo

mp_04

| | |
|---|---|
| repeats | 1 to beyond ∞ · with hold on it picks the start point |
| color | oil can → bbd → tape → clean → early digital · ~3:00 = most neutral |
| halo | smears repeats in stereo · high settings feed back into the repeats |
| mix | live ↔ repeats · with mix cv patched it becomes the cv attenuator |

## 09 first flight

mp_09 · first echo

1. audio into L[M] · both outs to the mixer
2. zone to 3 · mix 11:00
3. repeats noon · color 3:00
4. turn rate to hear the doppler
5. clock into tempo for clean ratios
6. press [ skew ] and turn rate


## 11 µ rate · rate out

mp_11 · manual p.12 – 14

| | |
|---|---|
| µ zones 1 – 7 | linear doppler · follows skew (right side inverted) |
| µ zone 0 | 1 V/oct · ignores skew · karplus pitch |
| rate out | pulses at the rate · L and R OR'd when skewed · 8 V |
| very fast | zone 0 and part of 1: rate out just stays high |
| tempo | 0.25 – 50 Hz · two pulses set it · holds until rate moves |

### __fig.05 : color

CCW → CW




## 05 tempo

mp_05 · fig.02

| | |
|---|---|
| tempo | clock in (0.25 – 50 Hz) · rate snaps to ratios, no doppler |
| 1/1 | rate ~12:30 · ccw up to ×2 · cw down to /2 · zones ×/÷ by 2 |
| tap | two pulses set it · holds until you move rate |
| rate out | pulses at the current rate · both sides when skewed |

### __fig.02 : tempo ratios

clock in tempo




change zone to ×/÷ these by powers of 2 · skew = two ratios at once

## 06 hold · flip

mp_06 · buttons + gates

| | |
|---|---|
| [ hold ] | nothing in or out · everything else still moves it · non-destructive |
| [ flip ] | repeats backwards · zones 0 – 1 = "total protonic reversal" |
| gates | hold and flip jacks toggle on 2.5 V |


## 12 ping pong · swap

mp_12 · hold skew

| | |
|---|---|
| [ skew ] not skewed | ping pong: inputs summed to mono, repeats bounce L ↔ R |
| [ skew ] skewed | swap: L and R feedback paths trade places |
| the window | flashes while ping pong or swap is on |
| [ skew ] | press again to turn either off |

### __fig.06 : skew · ping pong

repeats at L and R

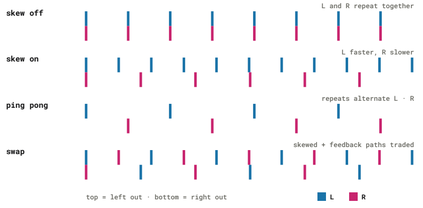


## 07 hidden moves

mp_07

| | |
|---|---|
| [ flip ] + [ hold ] | input gain, mix full dry: blue –3 · green 0 · orange +3 · red +6 dB |
| clear zones | mix and repeats fully ccw (fw mp70 +) |
| firmware | power-on window colours · mp86 = teal / red |

## 10 patch ideas

mp_10 · manual

**karplus string** — zone 0
short envelope into L · pitch cv to µ · repeats ~1:00 sets decay

**dub echo** — zone 3 – 5
repeats noon, halo up, color full · ride repeats to max and back

**back and forth** — rate out › flip
repeats travel forward and backward on their own

**filter-verb** — zone 0
mix full cw, repeats + rate ccw · color = filter, halo = air

## 13 more patches

mp_13 · manual p.18 – 20

**repeater eater** — sequence zone
one sequencer on zone, another into the inputs · echoes, flange, karplus per step

**octaviocho** — zone 1 – 5
tri or sine of the same vco into µ · more repeats = octave-up fuzz

**stereo chorus** — zone 0 – 2 · skew
slow bipolar lfo, attenuated, into µ · color 3:00 · repeats up for shimmer

**flip the script** — zone 4 · flip
repeats ccw, mix cw · vocals come out reversed but keep their rhythm

**(nil)zone∞** — empty input
mix cw, repeats max · stepped random on zone + rate, woggle on color


## 14 tips

mp_14 · manual p.17

| | |
|---|---|
| the facsimile | play in small zones, hold, then visit zone 7 · repeats picks the vantage point |
| color builds up | color acts on every pass · modulation speed changes the result over time |
| zone 0 food | impulses, noise bursts, droning oscillators |
| dynamics | in zone 0, input level can excite or damp the repeats · shape transients |
| [ flip ] + µ | flip zone 0 or 1 while sequencing µ: drops it an octave |

## __fig.03 : the panel

numbers match the legend

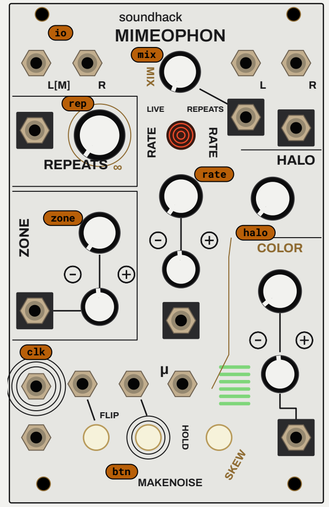


| | |
|---|---|
| io | in · out · stereo · L[M] feeds both |
| mix | mix · live ↔ repeats + cv |
| rep | repeats · 1 → ∞ · start point when held |
| zone | zone · 0 – 7 · window colour |
| rate | rate · µ · size in zone · doppler in |
| halo | halo · color · stereo smear · tone |
| btn | flip · hold · skew · reverse · freeze · … |
| clk | tempo · rate out · clock in · pulses out |

## 08 specs

mp_08

| | |
|---|---|
| size | 16 hp |
| power | 100 mA +12 V · 10 mA –12 V |
| cv | 0 – 8 V · µ ±3 V · gates 2.5 V |

design homage to the house of x / powers of x data pages — designed by tom muller with jonathan hickman · panel drawing after the make noise panel
not affiliated with make noise, soundhack or marvel

conceived by mellotom · mimeophon-navigator ... 00.10_01
created with claude