plexiphon

_travelers guide
_for weaving the plexus

16 hp	0 modes to pick	∞+ decay at max

› then noon = 12 o'clock tags = the panel drawing

stereo modeless spatial texturizer · reverb to multi-tap echo and everything between · by tom erbe

01 what it is

px_01

a texturizer	stereo, morphs smoothly from reverb to multi-tap echo · best results are neither
modeless	no algorithms to pick · every knob works across its whole range, all the time
everything talks	"delay time" comes from plexus, size and couple together · explore rather than aim

02 in · out · level

px_02

stereo	patch only **L[M]** and it feeds both · take only **L[M]** out for a mono mix
level	input gain · unity about 2:30 · start at noon – 1:00, more for quiet signals or clipping
mix	dry ↔ wet · has its own cv jack
the window	the light grid shows the current size, in mimeophon-style colours

09 first flight

px_09 · first space

1. audio into **L[M]** · both outs to your mixer
2. **level** around 1:00 · **mix** at noon
3. **plexus** low, **size** middle = a room
4. raise **decay** · move **color**
5. **plexus** up slowly to hear it turn into echoes
6. press **[skew]** and turn plexus, size or color

__fig.04 : level


input gain



mix is separate: level only sets what goes in

__fig.05 : diffuse

soften ↔ sharpen

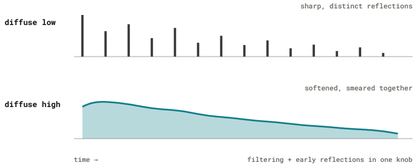


03 the plexus

px_03 · fig.01

plexus	down = more paths, more tangled = reverb · up = fewer paths = multi-tap echo
size	with plexus low it acts like room size · with plexus high, like the repeat rate
couple	how much L and R mix inside · full ccw = two separate mono plexiphons

__fig.01 : plexus x size

one continuous space

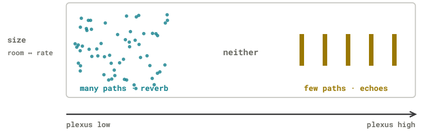

04 tone · time

px_04

diffuse	filtering + early reflections · softens or sharpens the plexus
decay	feedback inside the network · max = more than infinite
color	darkens ccw of 1:00 · brightens cw of 1:00 · changes over time with decay

__fig.06 : couple

stereo inside the plexus


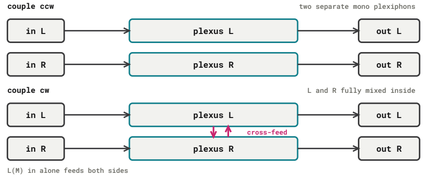


__fig.07 : color

1:00 = neutral

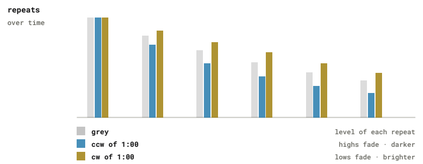


05 send

px_05 · gate in · fig.02

high	input goes into the plexus · unpatched = always high
low	input is kept out · what is already inside keeps ringing
note	it does not change **mix** · the dry signal still passes

__fig.02 : send

gate in




06 skew

px_06 · button

press · yellow	plexus, size and color move L and R in opposite directions · wider, stranger
press · green	keeps the spread, now both sides move the same way
hold	clears the skew (light off)

__fig.08 : decay


feedback in the network



max = more than infinite: it builds instead of fading · ride level or send

__fig.09 : skew

button · plexus, size, color

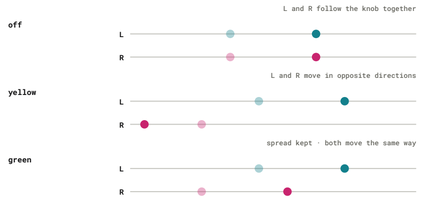

faint = before turning · solid = after · hold skew to clear
skews plexus, size and color

07 cv

px_07

cv out	an envelope follower: a voltage that follows the output level
attenuverters	**plexus** **decay** **color** **size** · noon = off
direct	**couple** **diffuse** **mix** cv jacks

10 tips

px_10


tempo feel — send gate
gate the send from a clock division for rhythmic bursts into the plexus

mono tricks — skew · couple
still useful from the **L[M]** out alone, or for parallel processing

feedback in — cv out
patch the follower to plexus, size or a vca elsewhere

__fig.10 : patching


L(M) normals

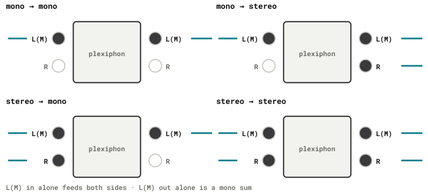

L(M) in alone feeds both sides · L(M) out alone is a mono sum

__fig.11 : cv out


envelope follower

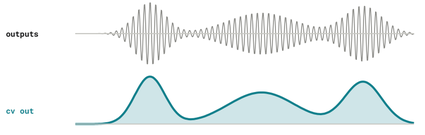

patch it to plexus, size or a vca elsewhere to close the loop

__fig.03 : the panel

numbers match the legend

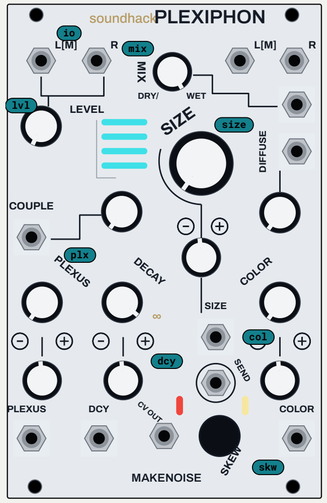

io	**in** · **out** · stereo · L[M] for mono
lvl	**level** · input gain · unity ~2:30
mix	**mix** · dry ↔ wet + cv
size	**size** · room size ↔ repeat rate
plx	**plexus** · **couple** · paths · L/R coupling
dcy	**decay** · **diffuse** · feedback · softness
col	**color** · dark ← 1:00 → bright
skw	**skew** · **send** · **cv out** · stereo spread …

08 specs

px_08

size	16 hp
power	240 mA +12 V · 5 mA –12 V
code	tom erbe (soundhack) for make noise