source ..... mutable instruments docs
rev 2026.10

rings _travelers guide _for synthesizing nature

3	4	10
resonators + 3 hidden	voices, strummed	s of ringing

[model] press [model] hold › then noon = 12 o'clock cw / ccw = clockwise / counter

you bring the hit, rings is the body that rings · three resonators + three hidden ones + an easter egg

one cv from a sequencer is enough to play it · long press = 3 s

orange = hold

01 buttons · LEDs

rng_01

[poly]	voices: 1 ● · 2 ● · 4 ● · chords = strum notes quickly
[poly] 3 s	**3 voices** bouncing odd / even in an o e e o e e o e pattern · LED red + pulsing green
[model]	resonator: modal ● · sympathetic strings ● · string ●
[model] 3 s	its **hidden twin** (04) · LED pulses · [model] again = back
poly LED blinks off	a new note was strummed
power on + [model]	colour-blind mode: blink counts + brightness levels

02 knobs · cv

rng_02

[frequency]	root, in semitone steps · 5 octaves
[structure]	the shape of the body: depends on the resonator (04) · one notch = pure harmonic
[brightness]	to noon: opens the exciter · past noon: higher modes ring longer (wood → glass)
[damping]	decay, from under 100 ms to about 10 s
[position]	where it is struck · middle = hollow, square-like
5 attenuverters	cv amount for each knob · same order as the jacks
[frequency] att, unpatched	fine tune ±1 semitone



07 LED codes

rng_07

poly LED	● 1 voice · ● 2 · ● 4 · red + pulsing green = 3
model LED	● modal · ● sympathetic · ● string · pulsing = hidden twin
calibrating	LED 1 orange (send 1 v) › LED 2 orange (send 3 v) · both red = failed
firmware update	both orange at boot · LED 1 green = receiving · LED 2 = level, green or yellow is good · both orange = writing · alternating red = too quiet


03 patching

rng_03

[strum]	trigger = start a new note (the old one rings out on its own voice)
[v/oct]	pitch of the resonator
[in]	the excitation: clicks, noise, contact mics, drums · modular level
[odd] [even]	patch both to split · one cable = both mixed
mono	odd / even = complementary partials or pickup phase
poly	odd / even = alternate voices

__fig.01 : what plays it

the normalling, drawn



the minimum patch: one sequencer cv into v/oct. every note change plucks with its own exciter

poly 2 / 4: each new note moves to the next voice and the last one rings on

06 calibration · fixes

rng_06

prep	unplug cv · keyboard cv into v/oct · a cable in the frequency cv jack, other end loose
[poly]+[model] 2 s	first LED blinks orange
1 v › [poly] › 3 v › [poly]	done · both LEDs red = failed, try again
fine tune dead	the loose cable step was skipped: recalibrate
constant noise	nothing patched: hold both (orange) · hold both again (red) · [poly] (green) · [poly]
firmware	power on holding [poly] · play the file into in · frequency = gain

04 resonators

rng_04 · [model]

modal — struck bars, plates, tubes (as in elements)

structure	ratio between partials: plate · bar · string
brightness	wood / nylon → glass / steel
damping	how long the modes ring
position	strike point · centre cancels even modes
odd / even	odd and even partials

sympathetic strings — sitar / sarod drones (comb filters)

structure	tuning set between strings · notches at octaves and fifths
brightness	string brightness
damping	how long they keep ringing
position	excitation point
odd / even	pickup phase

string — extended karplus-strong

structure	modulation + detuning of partials: curved bridge (sitar, tanpura) to piano tension to inharmonic
brightness	pluck brightness · all-pole absorption filter
damping	decay
position	pluck point

only the modal model reaches a pure harmonic spectrum, at the structure notch: otherwise the pitch is bell-like by design

04 hidden twins

rng_04 · hold [model] 3 s

2-op fm — hold [model] on modal · pulsing green

structure	frequency ratio
brightness	fm index
damping	fm index + amplitude decay
position	feedback · none at noon
in	envelope follower on fm index + level

western chords — hold [model] on sympathetic · pulsing yellow

structure	chord: strings tuned to chords, not fifths / octaves


karplusverb — hold [model] on string · pulsing red

structure	as string, plus a reverb whose absorption and decay follow the string

a short [model] press from a twin returns to its normal model

__fig.02 : three bodies

what you are hitting

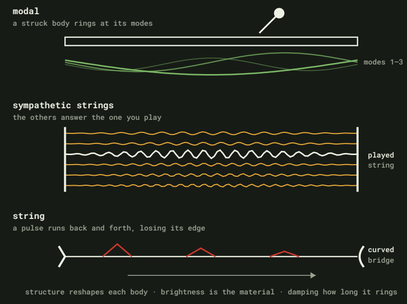

structure reshapes each body · brightness is the material · damping how long it rings

05 disastrous peace

rng_05 · the easter egg

enter / leave	set the knobs as in fig.04, then hold [model] for a few seconds
what it is	organ / string-machine synth, loosely after the roland rs-09
[poly]	chord size: 10-note fat chords (no overlap) … 3-note chords that overlap 1 · 2 · 4
[model]	fx: formant filter ● · solina-ish ensemble ● · caveman reverb ●
[model]	a variation of that fx (gentler formant, shinier reverb)
[frequency] [structure]	root note · chord type
[brightness]	registrations: mixes of square + saw octaves, dark → bright
[damping]	decay, then attack · fully cw = drone
[position]	fx amount
[strum]	fires the envelope on a new group of voices
[v/oct] [in]	root (changes retrigger if strum is empty) · in goes straight to the fx

__fig.04 : the secret handshake

egg knobs




attenuverters: first three ccw-ish · last two cw-ish

then hold [model] a few seconds · same again to leave

positions read from the manual's photo: close is enough

__fig.03 : front panel

01–06 = sections · 07–15 = hardware

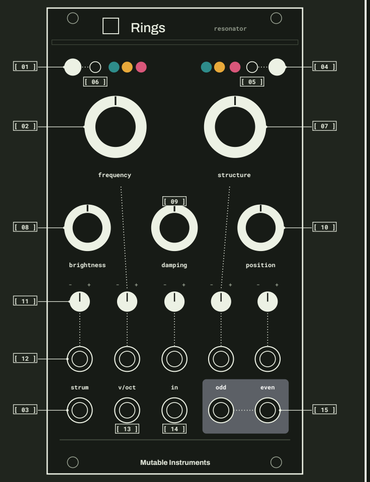

[01] __poly : voices · LED
[02] __frequency : knobs · cv
[03] __strum : patching
[04] __model : resonators + twins
[05] __model LED : egg fx colour
[06] __poly LED : calibration · status

[07] __structure : body shape
[08] __brightness : material
[09] __damping : decay
[10] __position : strike point
[11] __atts : one per knob
[12] __cv ins : bright freq damp struct pos
[13] __v/oct : pitch
[14] __in : excitation
[15] __odd / even : split outs

_where things hide

no menus · rng_08

held buttons

- **poly 3 s** 3 voices, odd / even rhythm
- **model 3 s** the hidden twin of this model
- **model, on a twin** back to the normal model
- **both 2 s** calibration
- **fig.04 + model** disastrous peace, in and out

at power on

- **hold model** colour-blind mode on / off
- **hold poly** firmware update (audio into in)
- **remembered** voices, model and egg state

design homage to the house of x / powers of x data pages — designed by tom muller with jonathan hickman · colors after native instruments super 8, tinted green
not affiliated with mutable instruments or marvel