


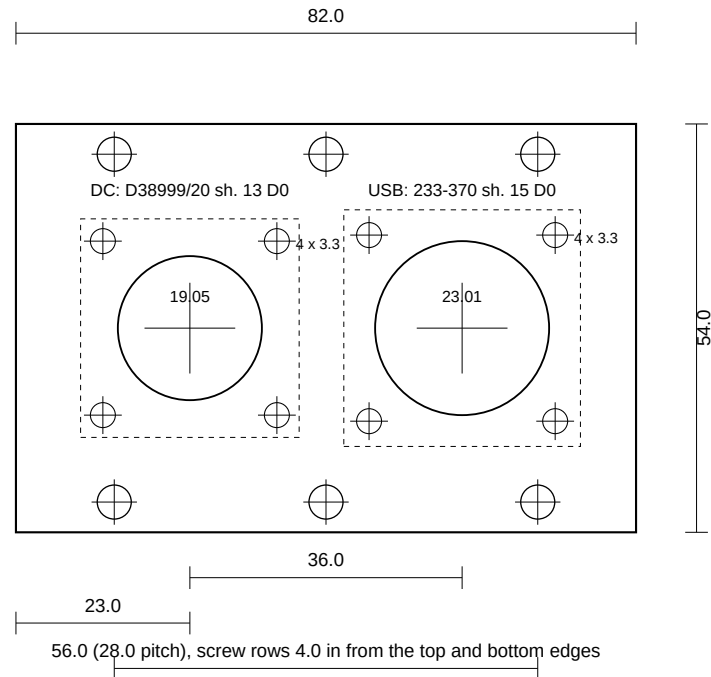

100 mm at 1:1 (print at 100 percent, no fit to page)

SHEET 2 of 2: CONNECTOR PLATE, 82 x 54 x 3 mm aluminium (5052 or 6061), edges broken, seen from OUTSIDE the case. Gasket: 2 mm closed-cell neoprene or EPDM, same outline and holes, between plate and wall.

Shore DC: Glenair D38999/20 shell 13 wall mount with round holes (D0), front panel mount: hole 19.05, four M3 clearance holes on a 23.01 square, flange 28.9 square. Its own gasket seals to the plate.

USB host: Glenair 233-370 shell 15 wall mount D0, front panel mount: hole 23.01, four M3 clearance holes on a 24.61 square, flange 31.29 square; the 3 mm plate is inside its 1.6 to 6.35 mm panel range.

Both receptacles: flange outside, gasket, plate, then the receptacle's own nuts inside; M3 x 10 stainless with spring washers. Plate to wall: six M4 x 16 stainless, washers both sides, Nyloc nuts inside; torque 1.2 N m in a cross pattern so the gasket loads evenly.

Pin functions, cables and the dock leads: appendix 32.29 and ASSEMBLY.md section 4. Nothing here has been cut yet; confirm the plate outline against the case in hand before machining.