


cross marks the case frame origin: X along the case, +Y toward the hinge wall; the plate is symmetric on both axes

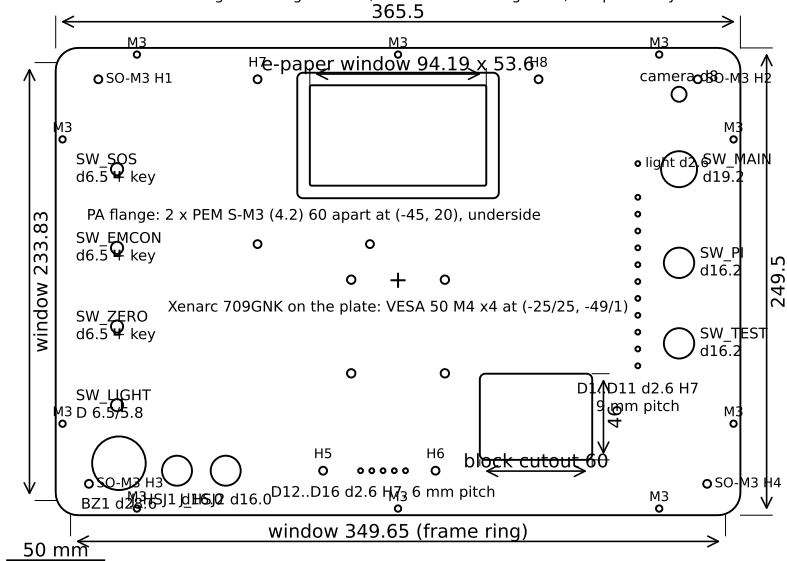

Plate

365.5 x 249.5 x 3.0, R12 corners, 5754 or 6061, black anodised

Frame screws

10 x M3 clearance 3.4 at the 1450PF inserts

Monitor

Xenarc 709GNK (205.15 x 139.49 x 28.66) lies on the plate at (0, -24): connector block cutout 60 x 46 R3 at (73.65, -72.2) with a gasket ring, four VESA 50 M4 (4.5) holes; no aperture

E-paper

Pervasive Displays E2370KS0C1 glass 92.99 x 53.0: window 94.19 x 53.6 at (0, 78); 1.0 pocket 107.19 x 66.6 R3 from above for the 2 mm lens; its flex to the backer's ZIF

Headset jacks

J_HSJ1 d16.0 at (-118, -101); J_HSJ2 d16.0 at (-92, -101) (U-174/U panel jacks, Amphenol Nexus drawing owed)

Camera

d8 sealed window at (150, 100) over the USB camera module on the backer's top strip

PA flange

RA30H1317M1 on the underside at (-45, 20): two PEM S-M3 nuts (4.2 holes) 60 apart, thermal compound, inside the backer's void

Buttons

SW_MAIN d19.2 at (150, 60); SW_PI d16.2 at (150, 10);
SW_TEST d16.2 at (150, -33) (C&K ATP19/ATP16, silicone
washer under the bezel)

Toggles

SW_SOS at (-150, 60); SW_EMCON at (-150, 18); SW_ZERO at (-150, -24): d6.5 with the 2.70 x 1.10 keyway toward -Y (APEM 5636ADKB-2V, K seal)

Light switch

SW_LIGHT at (-150, -66): D hole 6.5 with the 5.8 flat toward +X (NKK M2044SD3A01, O-ring and AT401A boot)

Sounder

BZ1 d28.6 at (-149, -97) (Floyd Bell MC-09-530-Q, 61663 gasket)

Light guides

17 x d2.6 H7 reamed: Mentor 1282.5004 IP68 (2.5 shaft, 3.2 bore)
 3. Prototype drawing generated by 2-head plate drawing