



SEEN FROM ABOVE (the top face). X along the case, +Y toward the hinge wall. No other feature: H1 is a closed skin.

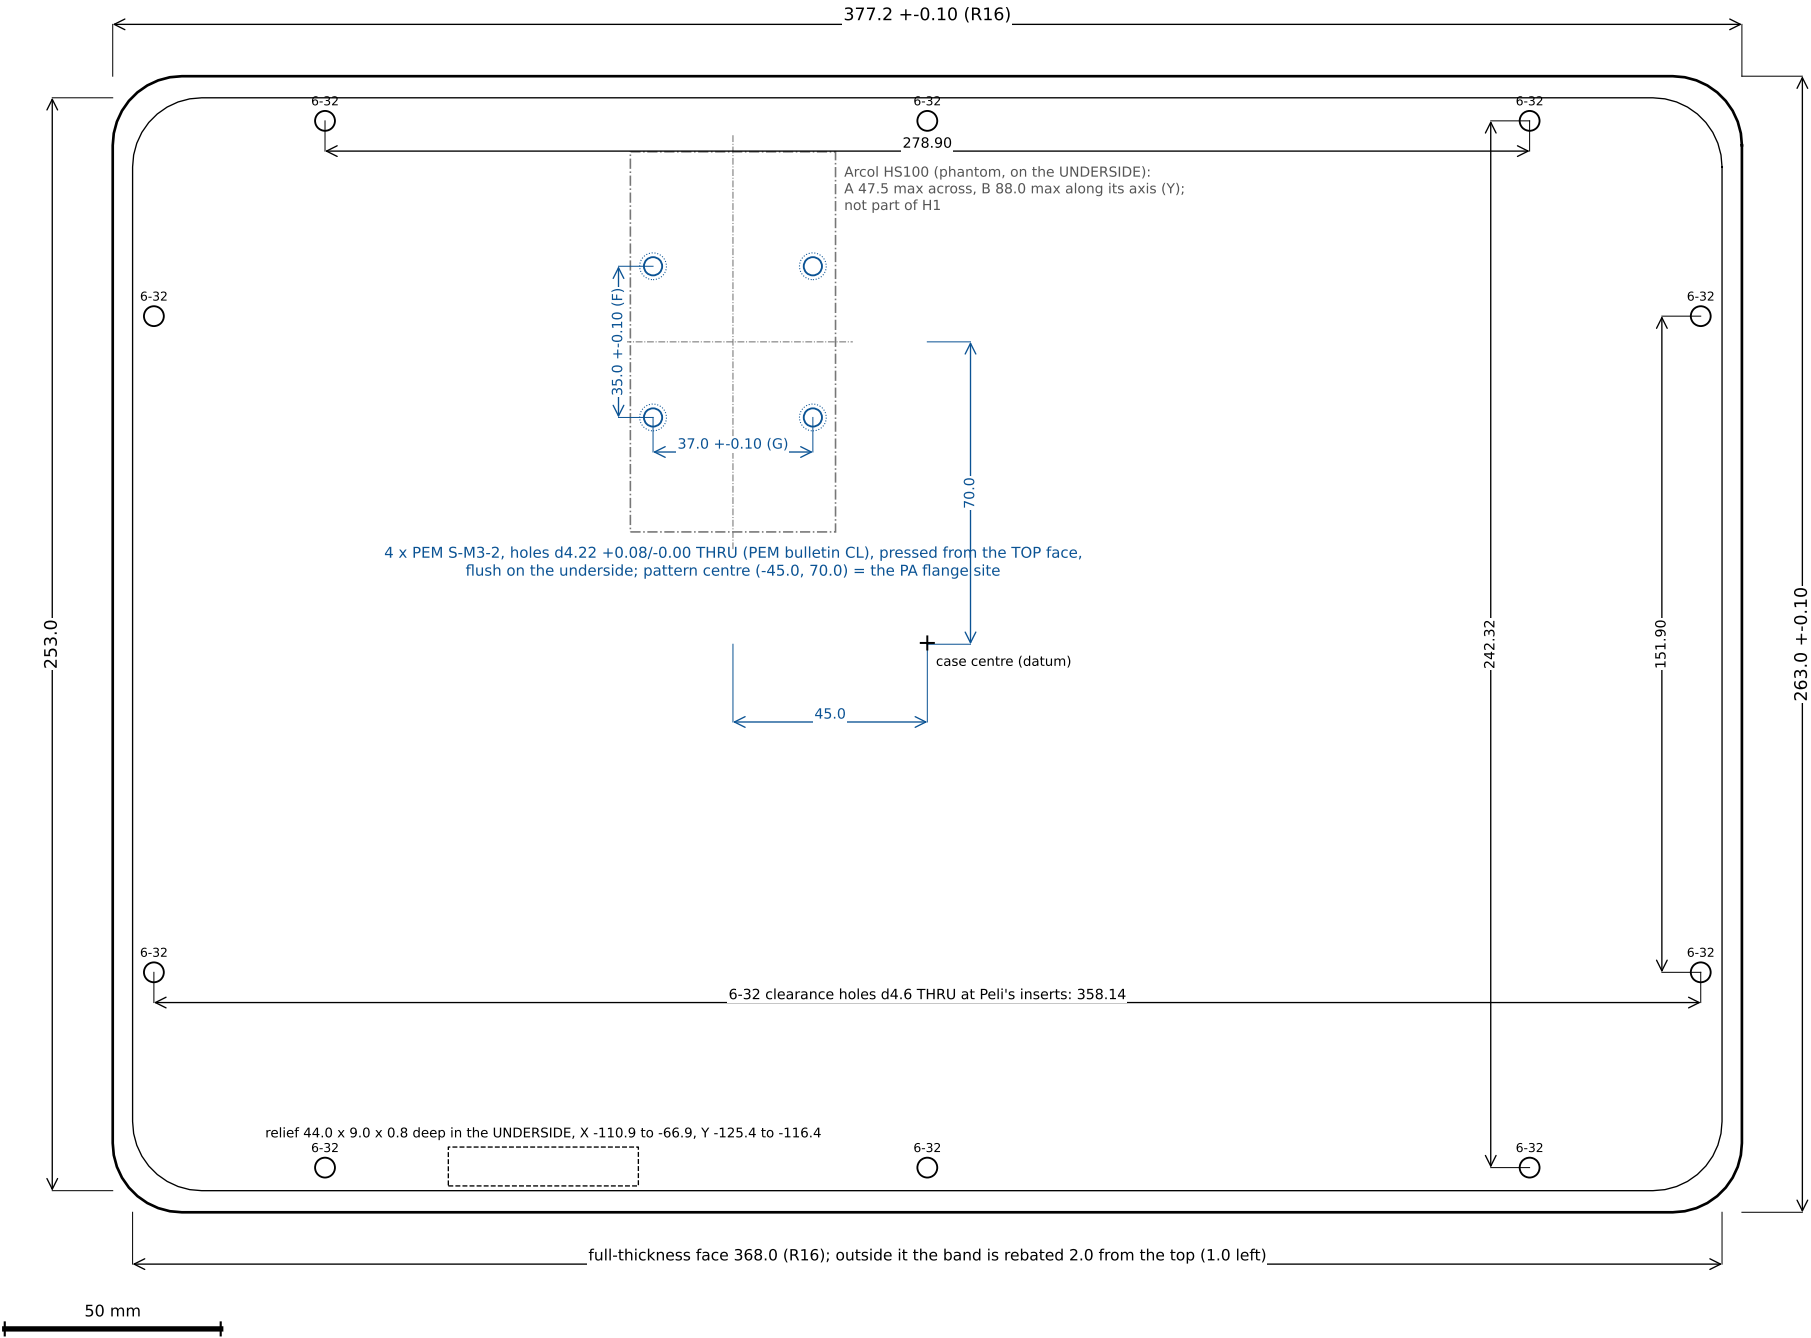

SECTION THROUGH ONE NUT (schematic): the resistor sits flat on the flush underside

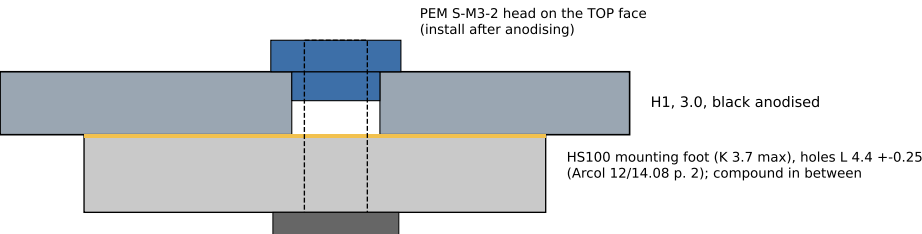

M3 A2 pan head and flat washer from BELOW through the resistor into the nut

Part
H1, heat-test face plate blank, quantity 1. It is NOT the face plate C1 (sheet 1) and is not fitted to the kit: it serves only the empty-case heat-balance test.

Material, thickness
EN AW-5754 (H22 or H32) or EN AW-6061-T6 aluminium plate, 3.0 +/- 0.13 (EN 485-4 class, INFERRED). No substitution without asking.

Finish
Black anodised all over (Type II / sulphuric acid class, dyed black, sealed), the same finish as C1, because the test measures the heat that leaves through this plate and the finish sets its emissivity. The four PEM nuts are pressed AFTER anodising. No marking, no paint.

Outline and seal
377.2 x 263.0 R16; band outside 368.0 x 253.0 (R16) rebated 2.0 from the top, 1.0 left; relief 44.0 x 9.0 x 0.8 in the underside over the frame's lettering; underside otherwise flat: it covers Peli's o-ring as C1 does

Holes
10 x d4.6 THRU at Peli's insert bores (the same places as C1), for 6-32 UNC x 1/2 in A2 pan heads by hand; 4 x d4.22 THRU (+0.08/-0.00, PEM bulletin CL) for PEM S-M3-2 on the HS100's pattern, G 37.0 along X and F 35.0 along Y, centre (-45.0, 70.0)

Omitted from C1
both windows and the e-paper pocket, all control, light-guide, sounder, headset and camera holes, the monitor frame's four 4.5 holes, the eight PEM SO-M3-10 standoffs and C1's two PA nuts 60 apart

Flatness
0.5 over the plate after anodising and nut insertion (the session's figure: a gap under the edge would open the o-ring seal the test relies on); report the measured value

Files
h1-heat-test-plate.dxf (layers OUTLINE, THROUGH, REBATE_2MM_TOP, RELIEF_0.8MM_UNDERSIDE, PEM_S_M3), .step, .stl; this sheet governs

NOTES
1. Units mm. Datum: the case centre (the plate's centre); X along the case, +Y toward the hinge wall. The DXF is in the same frame.
2. The HS100 is not part of H1: it is shown to place the pattern. Its mounting holes are L 4.4 +/- 0.25 on F 35.0 +/- 0.3 x G 37.0 +/- 0.3 (Arcol 12/14.08 p. 2), so an M3 floats at least 0.5 in them, more than the pattern's +/- 0.3 and H1's +/- 0.10 together; M3 x 10 A2 pan heads with flat washers.
3. The resistor's footprint stays inside the 1450PF window, 2.9 mm from its edge at +Y (the ring under the plate): bend the +Y tag's lead down and toward -Y (h1-heat-test-plate-check.out).
4. Break all edges 0.2 to 0.5; no burr on the underside's sealing band. Deburr the PEM holes lightly on the top face only.
5. Quote per RFQ line H1 (v2/docs/records/od01/MACHINING-RFQ.md). Do not cut before the case and frame bought for the test have passed that request's receipt checks R1, R2, R3, R5 and R6 (its section 6).

TOLERANCES AND STATUS
Dimensions in mm. Kit parts (this sheet): machined positions and outlines +/- 0.10; the 3.0 face plate +/- 0.13 and the 6.0 entry plates +/- 0.20 (EN 485-4 class, standard not held, INFERRED); the setting leg's pad height +/- 0.10; rebate depth and line +/- 0.10; spot-face floors +/- 0.10.
Peli: the 1450PF sheet 1453-314-000 rev A states +/- 0.76 on one-decimal and +/- 0.25 on two-decimal mm (VERIFIED); drawing 1451-931 states no tolerance ("typical industry-standard tolerances apply"), so every case allowance is the session's (INFERRED, UNSTATED).
Design basis only (v2/docs/CASE-MARGINS.md section 1, Verdicts): a MET row still meets its minimum with every unstated allowance taken twice, a sensitivity reading and not a bound on those allowances; an OPEN row rests on something no held source gives. Nominal CAD establishes no fit, seal or alignment; checks T1 to T11 (CASE-MARGINS.md section 5) do. Prototype: nothing on this sheet has been made, bought or fitted.
H1 (this sheet): outline +/- 0.10; thickness 3.0 +/- 0.13; rebate depth 2.0 and its line +/- 0.10; relief depth 0.8 +/- 0.10; the ten 6-32 holes and the four PEM holes on position +/- 0.10 from the datum; the ten 6-32 holes +/- 0.10/-0.00; the four PEM holes 4.22 +/- 0.08/-0.00 (PEM bulletin CL); the relief's position +/- 0.5.

MeshSat field kit V2, Peli 1450 case set: heat-test part

H1 heat-test face plate blank: 377.2 x 263.0 x 3.0, ten 6-32 holes, four PEM S-M3 on the HS100 pattern 37.0 (X) x 35.0 (Y)

MESH SAT-1357 (od01b). PROTOTYPE: nothing made, bought or fitted. Quantity 1. Serves ONLY the empty-case heat-balance test.

Source: tree e0cd5ec1; inputs by sha256 (first 12):
3bdb88df9826 v2/ecad/tools/panel1450.py
9e949f9e1b92 v2/cad/h1_heat_test_plate.py
8e0d56a6a030 v2/cad/h1_heat_test_plate_drawing.py
19703fa5838f v2/release/case-2026-09-27/face-plate/face-plate.dxf
ec17870c5a92 v2/vendor/arc0l/arc0l-hs-datasheet-12-14-08.pdf

Generated 2026-09-29 by v2/cad/h1_heat_test_plate_drawing.py from the files named left. The editable sources govern; this sheet governs over the DXF and STEP of H1 where they differ (tell us).

Sheet H1-1 of 1

A3, mm
not to scale for measurement:
dimensions govern