




EAST WALL, SEEN FROM OUTSIDE: case +Y (the hinge wall) on your RIGHT. 5 arrestors, 16.3 through, spot-face 26.0 x 1.5 on the BACK (dashed); M4 tapped through (drill 3.3) at Y +-45, +-100, Z 40.65 / 77.35; dotted: the 27 mm wall hole

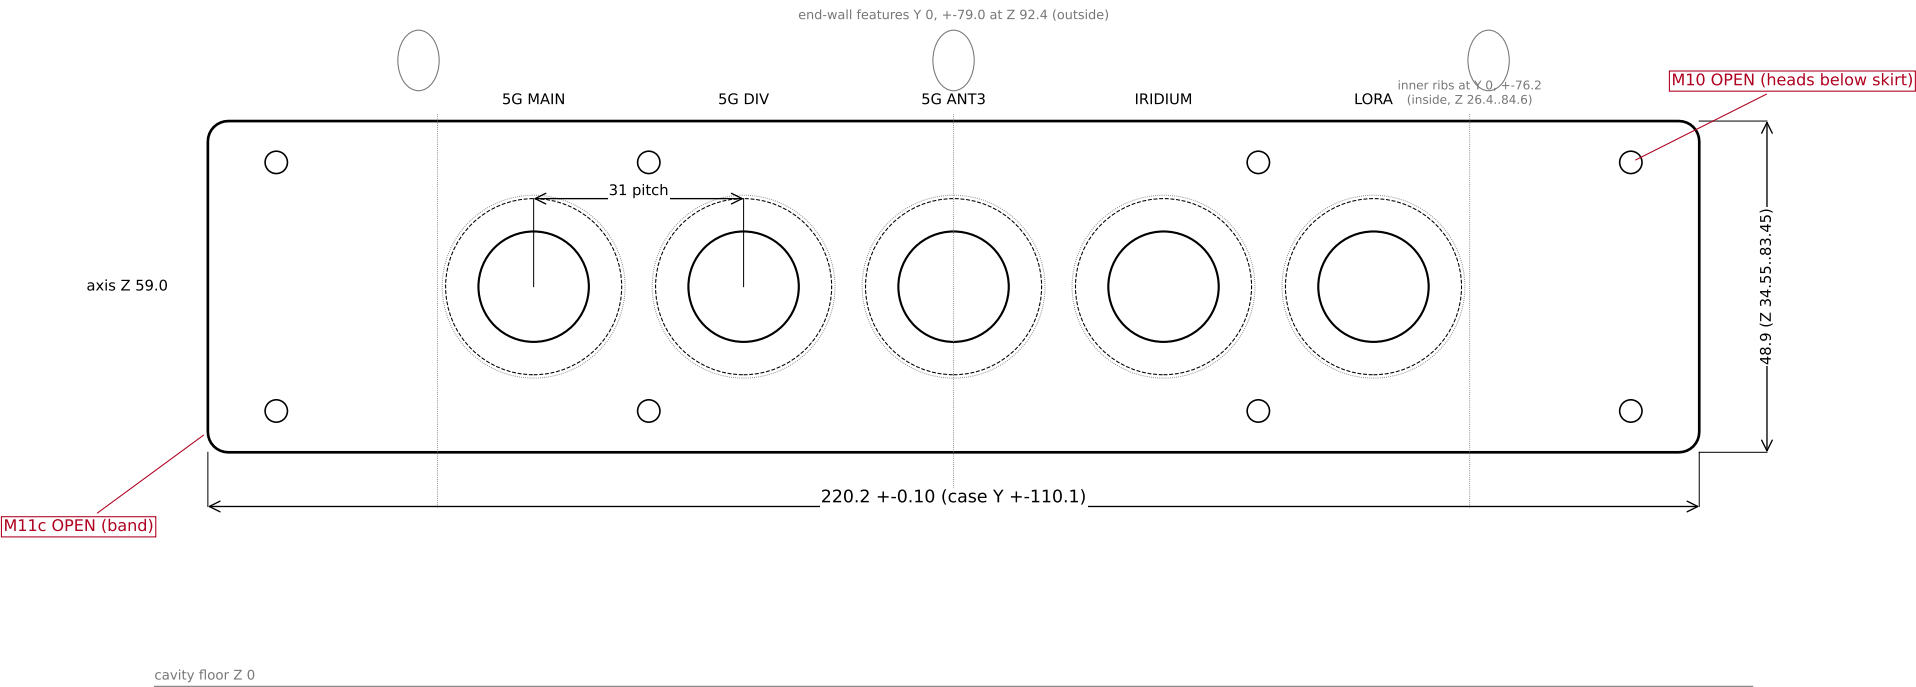

WEST WALL, SEEN FROM OUTSIDE: case +Y (the hinge wall) on your LEFT. 7 arrestors, 16.3 through, spot-face 26.0 x 1.5 on the BACK (dashed); M4 tapped through (drill 3.3) at Y +-45, +-100, Z 40.65 / 77.35; dotted: the 27 mm wall hole

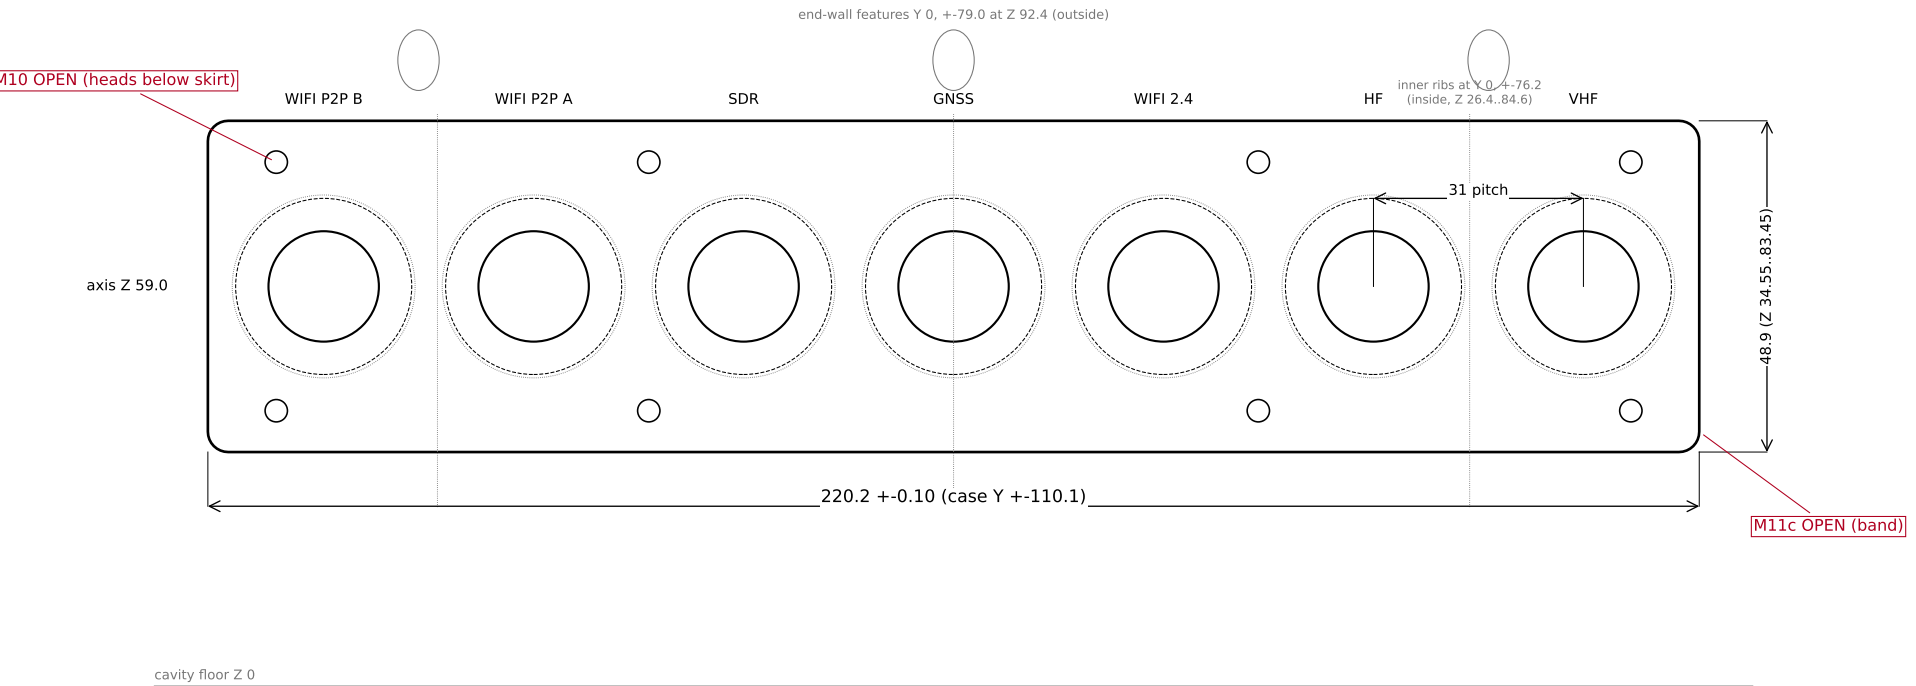

SECTION through one arrestor on its axis, the wall's Y horizontal: the case INSIDE to the LEFT. Tightened on the bench, cap up, ground lug down; one ground lead per plate to stud F outside (GROUNDING-AND-SHIELDS.md, owed). Not to scale for measurement.

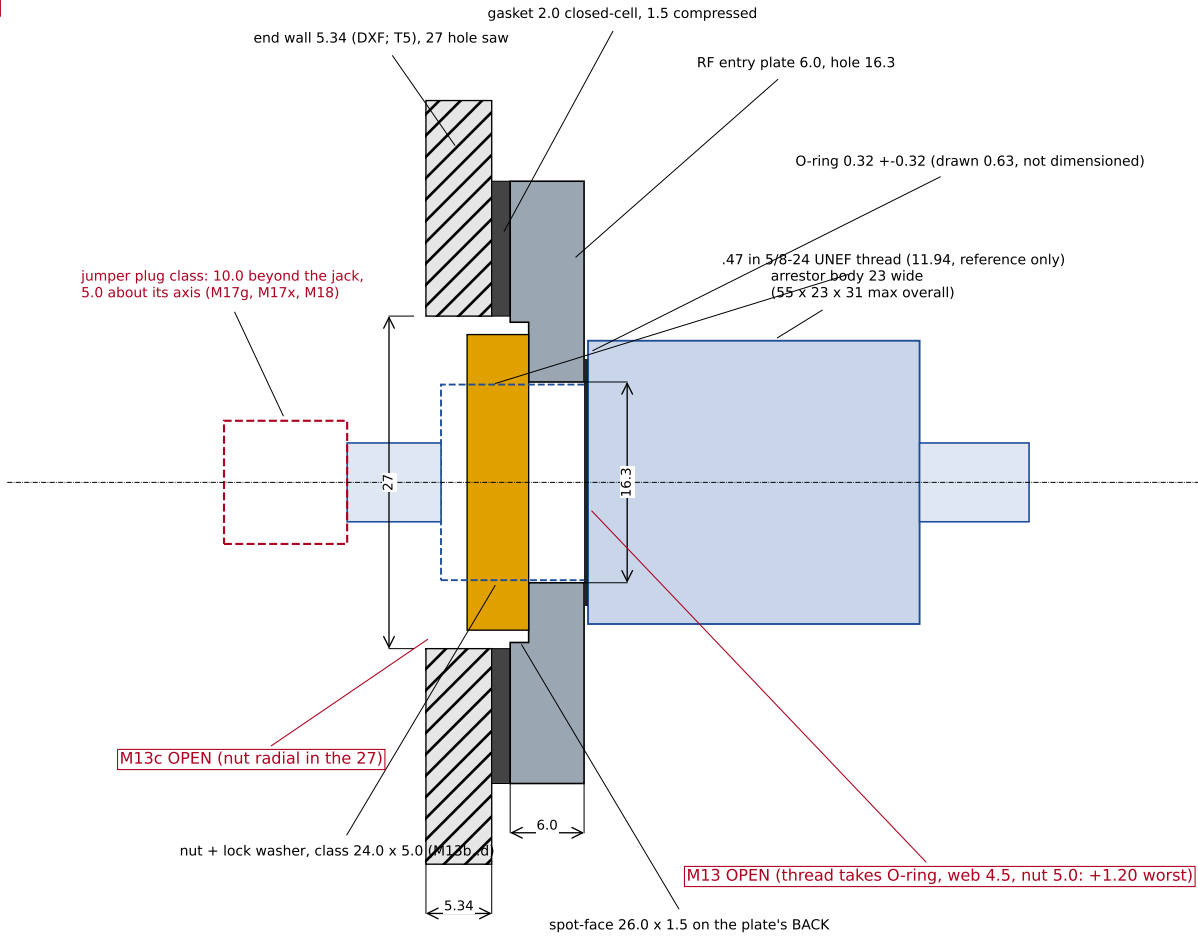

TOLERANCES AND STATUS  
Dimensions in mm. Kit parts (this sheet): machined positions and outlines +-0.10; the 3.0 face plate +-0.13 and the 6.0 entry plates +-0.20 (EN 485-4 class, standard not held, INFERRED); the setting leg's pad height +-0.10; rebate depth and line +-0.10; spot-face floors +-0.10.  
Peli: the 1450PF sheet 1453-314-000 rev A states +-0.76 on one-decimal and +-0.25 on two-decimal mm (VERIFIED); drawing 1451-931 states no tolerance ("typical industry-standard tolerances apply"), so every case allowance is the session's (INFERRED, UNSTATED). Design basis only (v2/docs/CASE-MARGINS.md section 1, Verdicts): a MET row still meets its minimum with every unstated allowance taken twice, a sensitivity reading and not a bound on those allowances; an OPEN row rests on something no held source gives. Nominal CAD establishes no fit, seal or alignment; checks T1 to T11 (CASE-MARGINS.md section 5) do. Prototype: nothing on this sheet has been made, bought or fitted.  
The arrestor's drawing marks every dimension 'for reference only': its .XX +-0.51 is an unstated allowance; its O-ring, nut and washer are drawn, not dimensioned (TBD, PolyPhaser). The jumper plug is a class, not a part: M17g and M17x fail with the class as laid out until the plug is picked (CASE-MARGINS.md 3.4).

Margin rows this sheet's features enter (frame\_seat.out): key, verdict, min, nominal, worst, worst with unstated x2

|      |      |      |        |        |        |                                                                                                        |      |                        |      |       |       |       |                                                                                                          |
|------|------|------|--------|--------|--------|--------------------------------------------------------------------------------------------------------|------|------------------------|------|-------|-------|-------|----------------------------------------------------------------------------------------------------------|
| M10  | OPEN | 1.00 | +3.65  | +1.73  | -0.09  | highest part inside an end wall (the entry plate's top screw heads, Z 82.35) below the frame skirt     | M18  | OPEN                   | 1.00 | +7.63 | +3.36 | -0.61 | jumper plug's inner end to B16's tall parts in X (tightest: RockBLOCK, which it overlaps in Y and Z)     |
| M11  | MET  | 1.00 | +17.89 | +17.21 | +16.53 | inside hardware bearing on an end wall to its ribs at Y 0, +-76.2 (the entry plate's screw heads)      | M18b | MET                    | 1.00 | +8.14 | +7.30 | +7.30 | neighbouring arrestor bodies outside (22.86 across at the 31 pitch)                                      |
| M11a | MET  | 2.00 | +4.00  | +3.40  | +2.80  | wall web between neighbouring arrestor holes (27 at a 31 pitch)                                        | M18c | MET                    | 1.00 | +8.40 | +6.80 | +6.00 | outermost plug (west wall) to the setting legs' inner face in Y (the plug's X range covers the column's) |
| M11b | MET  | 2.00 | +3.64  | +3.04  | +2.44  | wall web, arrestor hole to entry-plate screw hole (screw -100, 77.35, beside the west wall's -93 site) | M4c  | MET                    | 1.00 | +5.86 | +3.18 | +1.80 | pack block's east face (X 178.65) to the entry plate's bottom screw heads (inner face X 184.51)          |
| M11c | OPEN | 3.00 | +3.60  | +3.00  | +2.40  | gasket band from a wall hole to the entry plate's edge (arrestor holes 3.60, 5.0 screw holes 3.60)     | M21g | MET                    | 1.00 | +4.34 | +3.08 | +2.20 | setting leg's column (X 180.17) to the entry plate's screw heads at  Y  100 (X 184.51), in X             |
| M11d | OPEN | 0.00 | +2.34  | +0.43  | -0.83  | entry-plate screw tips inside the plate's outer face (M4 x 12: nothing stands out under an arrestor)   | M17a | OPEN                   | 2.00 | +4.44 | +2.96 | +1.90 | east bundle (two RG-316 high, 4.98) between the pack's top (Z 44.58) and the plugs' undersides (Z 54.0)  |
| M11e | OPEN | 0.00 | +0.51  | +0.11  | -0.19  | each entry-plate M4 (3.98) starts in its 5.0 wall hole: float against hole marking and tapped position | M17b | OPEN                   | 1.00 | +2.22 | +1.00 | +0.20 | east cables under the next plug's body: the band's upper layer (the drop itself keeps 8.32)              |
| M11f | MET  | 0.00 | +1.50  | +0.92  | +0.92  | sealing washer's rubber face (8.0 across) covers its 5.0 wall hole, the screw anywhere in its float    | M17c | OPEN                   | 0.00 | +8.68 | +1.56 | -2.34 | outermost east cable ( Y  62) and its bundle (R 13.75) inboard of the legs' columns before them, in Y    |
| M11g | OPEN | 1.40 | +3.66  | +1.95  | +0.69  | entry-plate screws' thread engaged in the plate (at least two pitches, INFERRED)                       | M17d | OPEN                   | 2.00 | +5.42 | +3.44 | +1.94 | east bundle (4.98 wide) in the lane, B16's edge (X 165.0) to the legs' columns (X 175.40): free width    |
| M12  | MET  | 1.00 | +4.48  | +3.42  | +2.36  | entry plate's top edge below the end-wall features at Y 0 and +-79.0 (Z 87.93)                         | M17e | OPEN                   | 1.00 | +2.85 | +1.47 | +0.47 | east bundle going down beyond the leg: its inner face ( Y  115.25) to the leg's outer face ( Y  112.4)   |
| M12b | MET  | 1.00 | +5.05  | +4.27  | +3.59  | entry plate's Y edge on the end wall's flat outer skin (flat to  Y  115.15 at Z 34.55)                 | M17f | OPEN                   | 0.00 | +2.25 | +0.75 | -0.75 | east front bundle on the floor beside the dock strip's south edge ( Y  113, gen_pcb.e.py:15)             |
| M13  | OPEN | 0.00 | +2.12  | +1.20  | +0.38  | arrestor nut fully on its thread (.47: O-ring 0.32, 4.5 web under the spot-face, nut and washer 5.0)   | M17g | OPEN, FAILS AS ASSUMED | 0.00 | -1.21 | -2.43 | -3.23 | east layering under 5G MAIN (3 passing): its own cable at its place, clear of the cable below it         |
| M13b | MET  | 0.00 | +3.34  | +1.78  | +0.52  | nut and washer (5.0, from the spot-face floor) inside the wall hole's depth (plate, gasket, wall)      | M17x | OPEN, FAILS AS ASSUMED | 1.00 | +3.89 | -0.38 | -4.35 | east bundle's inboard column under the plugs to B16's edge (X 165.0), axis at the plug's inner end       |
| M13c | OPEN | 0.00 | +1.50  | +0.48  | -0.12  | nut and washer (24.0) inside the 27 wall hole, radial                                                  | M17w | OPEN                   | 1.00 | +6.38 | +2.11 | -1.86 | west cables (leaving downward, axis within 4.0 of the plug's end) outboard of B16's edge                 |
| M13d | MET  | 0.00 | +1.00  | +0.58  | +0.58  | nut and washer (24.0) inside the 26.0 spot-face, radial                                                |      |                        |      |       |       |       |                                                                                                          |

MeshSat field kit V2, Peli 1450 case set

RF entry plates on the end walls (C2, C4): the arrestors as the antenna bulkheads

MESHsat-1357. PROTOTYPE DESIGN: nothing made, bought or fitted.  
Session choices under the owner's standing rule of 26 Sep 2026 (SC-07).

Source: tree a8652172 plus the case release's changes (fnd/hc7); inputs by sha256 (first 12):  
3bdb88df9826 v2/ecad/tools/panel1450.py  
214e915b9855 v2/vendor/peli/1450/frame\_seat.out  
12a454c399c1 v2/cad/rf\_entry\_plate.py  
ae3f031d7ecb v2/vendor/polyphaser/polyphaser-gth-sff-al-sma-surge-protector.pdf

Generated 2026-09-27 by v2/cad/case\_drawings.py (sheet 4) from the files named left; regenerate with v2/cad/README.md. The editable sources govern; this sheet is a copy.

Sheet 4 of 14

A3, mm  
not to scale for measurement:  
dimensions govern; use the 1:1 templates for marking