Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

BC546A/B/C
BC547A/B/C
BC548A/B/C

NPN Silicon
Amplifier Transistor
625mW

Features

- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Through Hole Package
- 150°C Junction Temperature
- Epoxy meets UL 94 V-0 flammability rating
- Moisure Sensitivity Level 1
- Halogen free available upon request by adding suffix "-HF"

Mechanical Data

- Case: TO-92, Molded Plastic
- Polarity:indicated as below

Maximum Ratings @ 25°C Unless Otherwise Specified

Charateristic		Symbol	Value	Unit
Collector-Emitter Voltage	BC546	V_{CEO}	65	V
	BC547		45	
	BC548		30	
Collector-Base Voltage	BC546	V_{CBO}	80	V
	BC547		50	
	BC548		30	
Emitter-Base Voltage		V_{EBO}	6.0	V
Collector Current(DC)		I_C	100	mA
Power Dissipation@T_A=25°C		P_d	625 5.0	mW mW/°C
Power Dissipation@T_C=25°C		P_d	1.5 12	W mW/°C
Thermal Resistance, Junction to Ambient Air		$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction to Case		$R_{\theta JC}$	83.3	°C/W
Operating & Storage Temperature		T_j, T_{STG}	-55~150	°C

TO-92

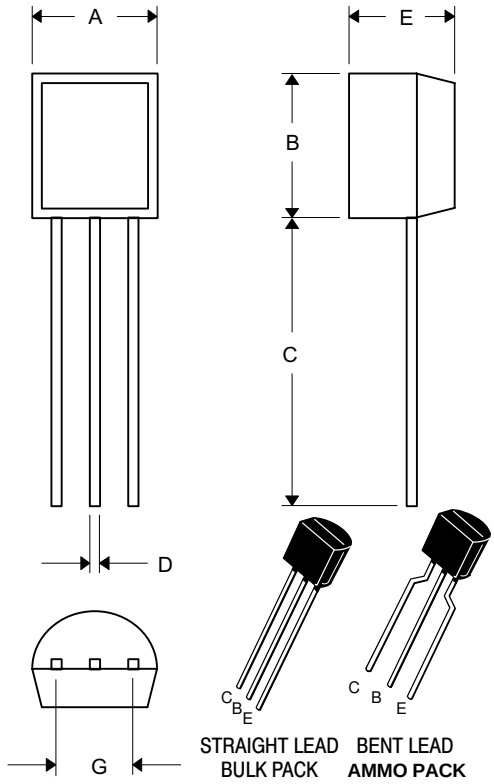

DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
A	.175	.185	4.45	4.70	
B	.175	.185	4.45	4.70	
C	.500	---	12.70	---	
D	.016	.020	0.41	0.63	
E	.135	.145	3.43	3.68	
G	.095	.105	2.42	2.67	Straight Lead
	.173	.220	4.40	5.60	Bent Lead

* For ammo packing detailed specification, click here to visit our website of product packaging for details.

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector–Emitter Breakdown Voltage (I_C = 1.0 mA, I_B = 0)	BC546 BC547 BC548	$V_{(BR)CEO}$	65 45 30	— — —	— — —	V
Collector–Base Breakdown Voltage (I_C = 100 μAdc)	BC546 BC547 BC548	$V_{(BR)CBO}$	80 50 30	— — —	— — —	V
Emitter–Base Breakdown Voltage (I_E = 10 μA, I_C = 0)	BC546 BC547 BC548	$V_{(BR)EBO}$	6.0 6.0 6.0	— — —	— — —	V
ON CHARACTERISTICS						
DC Current Gain		h_{FE}				—
(I_C = 10 μA, V_{CE} = 5.0 V)	BC546A/547A/548A BC546B/547B/548B BC546C/547C/548C		— — —	90 150 270	— — —	
(I_C = 2.0 mA, V_{CE} = 5.0 V)	BC546A/547A/548A BC546B/547B/548B BC546C/547C/548C		110 200 420	180 290 520	220 450 800	
(I_C = 100 mA, V_{CE} = 5.0 V)	BC546A/547A/548A BC546B/547B/548B BC546C/547C/548C		— — —	120 180 300	— — —	
Collector–Emitter Saturation Voltage (I_C = 100 mA, I_B = 5.0 mA)		$V_{CE(sat)}$	—	---	0.3	V
Base–Emitter Saturation Voltage (I_C = 100 mA, I_B = 5.0 mA)		$V_{BE(sat)}$	—	—	1.0	V
Base–Emitter On Voltage		$V_{BE(on)}$				V
(I_C = 2.0 mA, V_{CE} = 5.0 V)			0.55	—	0.7	
(I_C = 10 mA, V_{CE} = 5.0 V)			—	—	0.77	
SMALL–SIGNAL CHARACTERISTICS						
Current–Gain — Bandwidth Product		f_T				MHz
(I_C = 10 mA, V_{CE} = 5.0 V, f = 100 MHz)	BC546 BC547 BC548		150 150 150	300 300 300	— — —	
Output Capacitance (V_{CB} = 10 V, I_C = 0, f = 1.0 MHz)		C_{obo}	—	1.7	4.5	pF
Input Capacitance (V_{EB} = 0.5 V, I_C = 0, f = 1.0 MHz)		C_{ibo}	—	10	—	pF
Small–Signal Current Gain		h_{fe}				—
(I_C = 2.0 mA, V_{CE} = 5.0 V, f = 1.0 kHz)	BC546A/547A/548A BC546B/547B/548B BC546C/547C/548C		125 240 450	220 330 600	260 500 900	
Noise Figure		NF				dB
(I_C = 0.2 mA, V_{CE} = 5.0 V, R_S = 2 kΩ, f = 1.0 kHz, Δf = 200 Hz)	BC546 BC547 BC548		— — —	2.0 2.0 2.0	10 10 10	

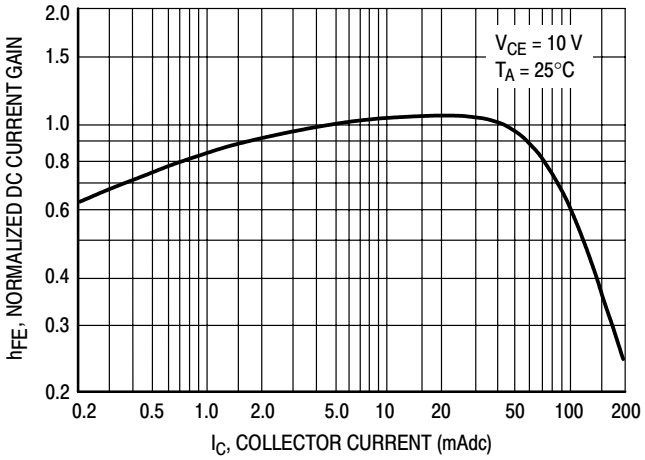

Figure 1. Normalized DC Current Gain

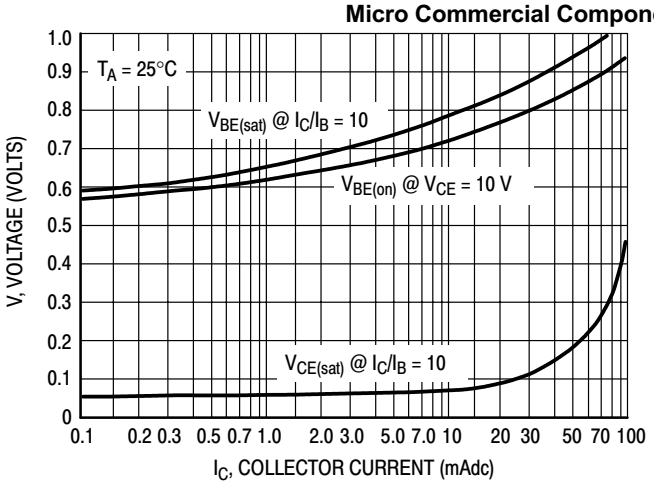

Figure 2. "Saturation" and "On" Voltages

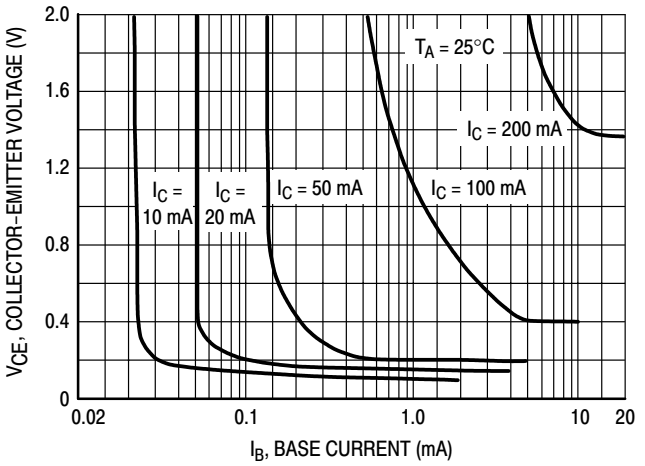

Figure 3. Collector Saturation Region

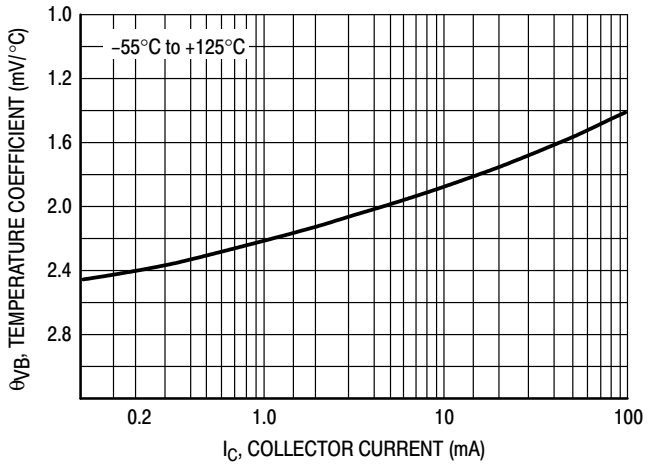

Figure 4. Base–Emitter Temperature Coefficient

BC547/BC548

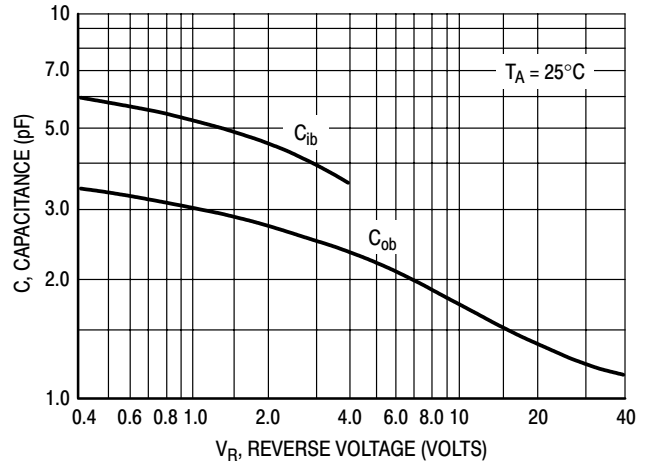

Figure 5. Capacitances

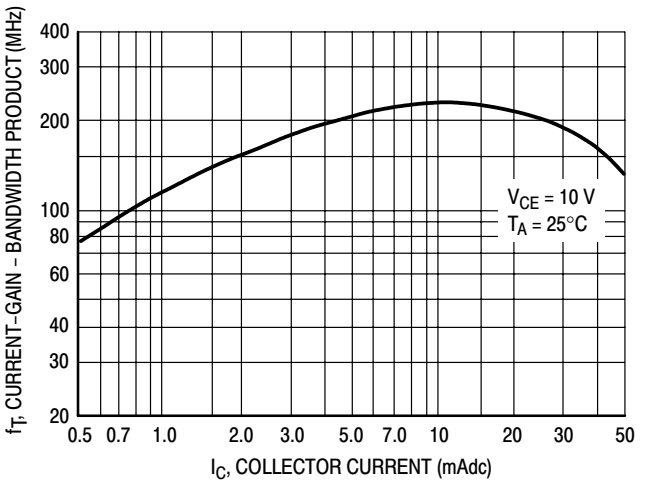

Figure 6. Current–Gain – Bandwidth Product

BC547/BC548

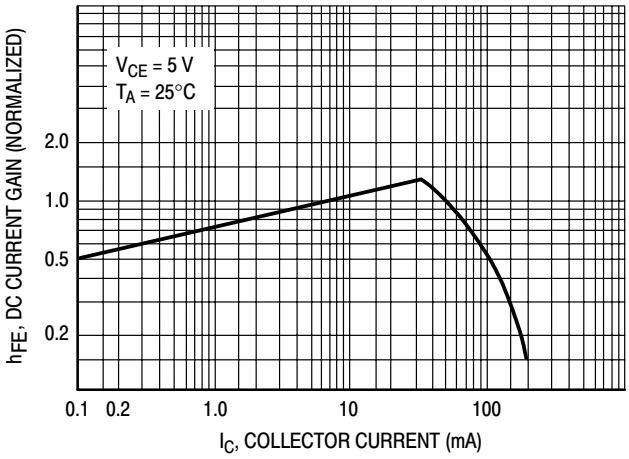

Figure 7. DC Current Gain

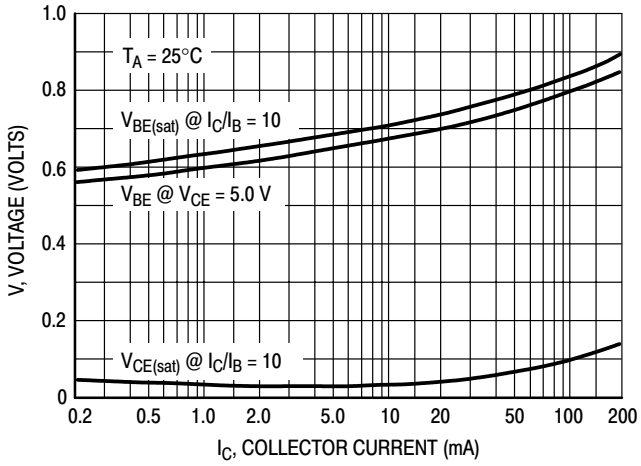

Figure 8. "On" Voltage

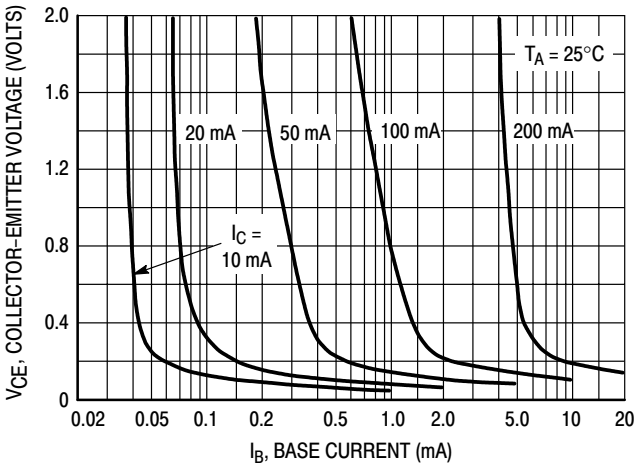

Figure 9. Collector Saturation Region

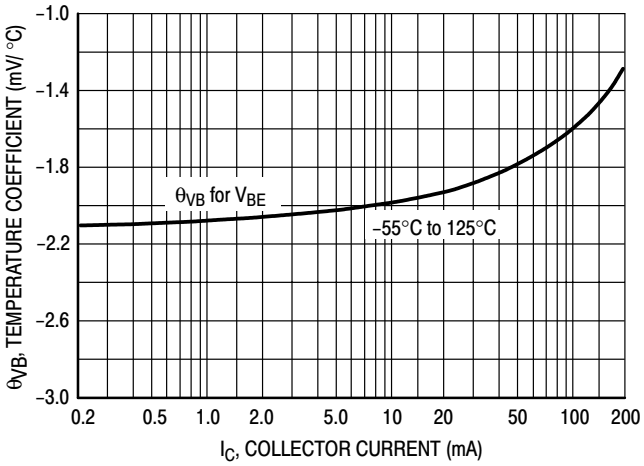

Figure 10. Base–Emitter Temperature Coefficient

BC546

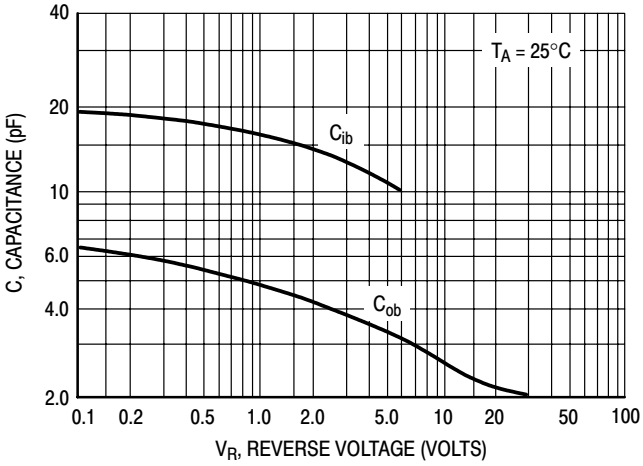

Figure 11. Capacitance

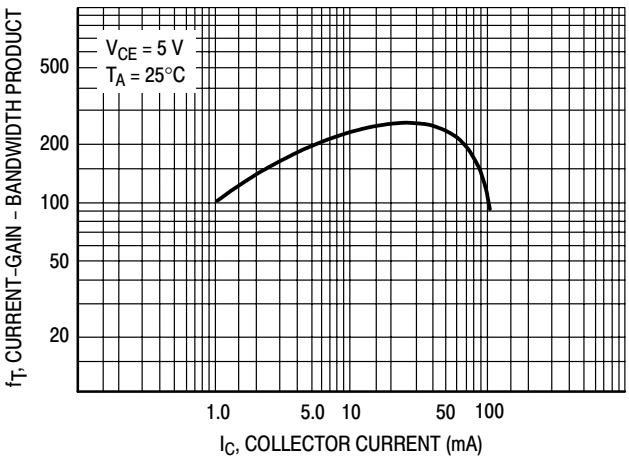

Figure 12. Current–Gain – Bandwidth Product

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-AP	Ammo Packing: 20Kpcs/Carton
Part Number-BP	Bulk: 100Kpcs/Carton

Note : Adding "-HF" suffix for halogen free, eg. Part Number-AP-HF

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . ***Micro Commercial Components Corp .*** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold ***Micro Commercial Components Corp .*** and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.