


Techno Live Patch

Kick / Percussion

— Audio
— Control Voltage
— Trigger / Gate

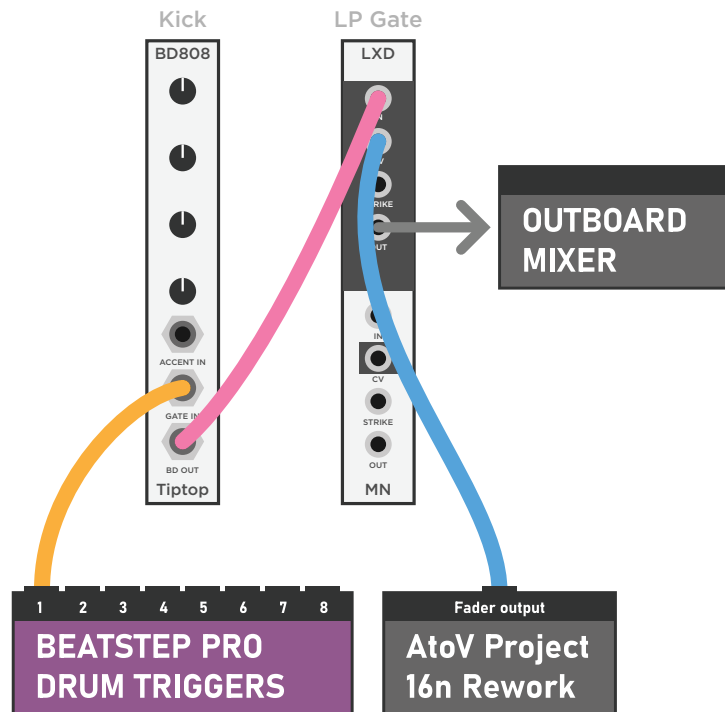


(a)

a - I use the Tiptop BD808 as the main kick. It receives a trigger from the Beatstep Pro, and I run the output through the Make Noise LxD Low pass gate. This one has a bit of resonance built in, which doesn't only sound good, it's also a great way to simultaneously control the punchiness of the kick, as well as the volume. To do so, I send a fader output from the 16n Rework to the CV input of the gate. The output goes directly to an outboard mixer, as I like to have easy access to the EQ and volume of the kick. The outboard mixer is also a nice place to overdrive the kick a bit, by cranking the mixer's input gain.

MONOTRAIL

TECH TALK

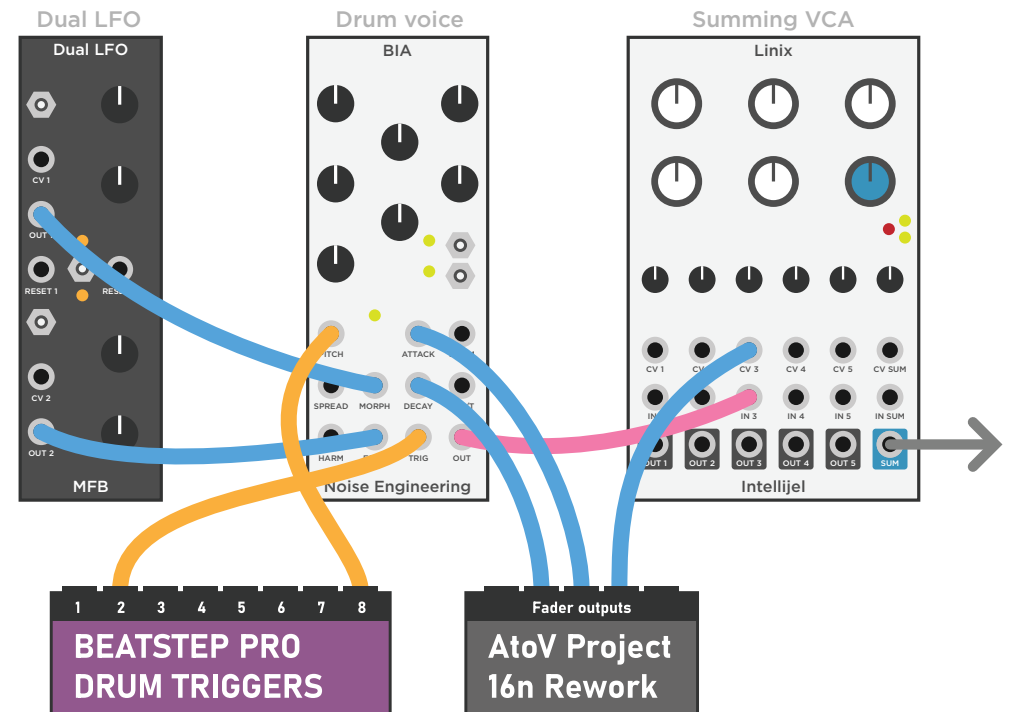

(b)

b - Next up is the Basimilus Iteritas Alter. It also gets triggered by the Beatstep Pro, but here we add some modulation. I generally like to have two LFOs available to modulate parameters. And I also use a dedicated trigger sequence from the Beatstep Pro that I can plug in wherever I like. For example into the pitch or spread.

The output of the Basimilus goes to the Intellijel Linix VCA, and I send a fader from the 16n Rework to this VCA to control the volume of the sound. I also use dedicated faders to the decay and attack of the Basimilus for manual control.

Techno Live Patch

Hats / Drum Bus


— Audio
— Control Voltage
— Trigger / Gate

MONOTRAIL

TECH TALK



a - For hats I use the MFB hi-hat and cymbal module with two simple trigger sequencers from the Beatstep Pro to the closed and open hi-hats. The mix output also goes to a VCA on the Linux, so I can control the volume of the hats with another fader from the 16n rework. Then, I send a separate fader to the decay of the open hi-hat for hands-on control of the sound.

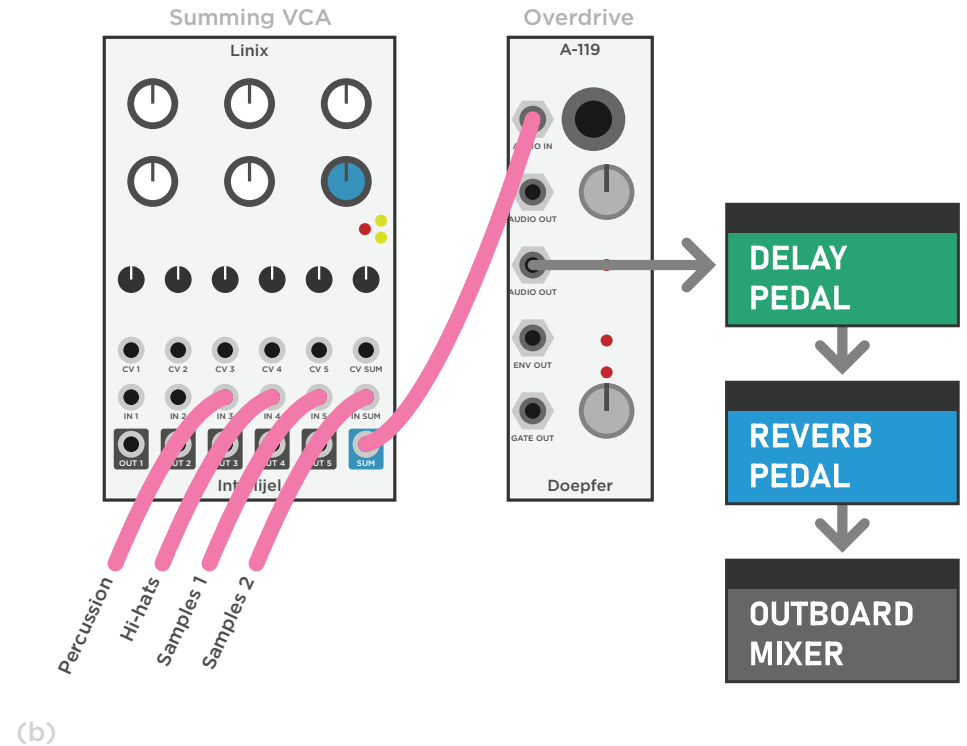


b - All percussion except for the kick, is send to the Intellijel Linux, which I use as a summing VCA, creating a little drum bus. The sum output of the Linux is sent to the Doepfer a-119, which I use as an overdrive to slightly distort the whole percussive part. From there it goes through a simple delay and reverb pedal for some hands-on tweaking, before it finds its way to another input on the outboard mixer for EQ.

Techno Live Patch

Dual Sample Player

MONOTRAIL TECH TALK

- Audio
- Control Voltage
- Trigger / Gate

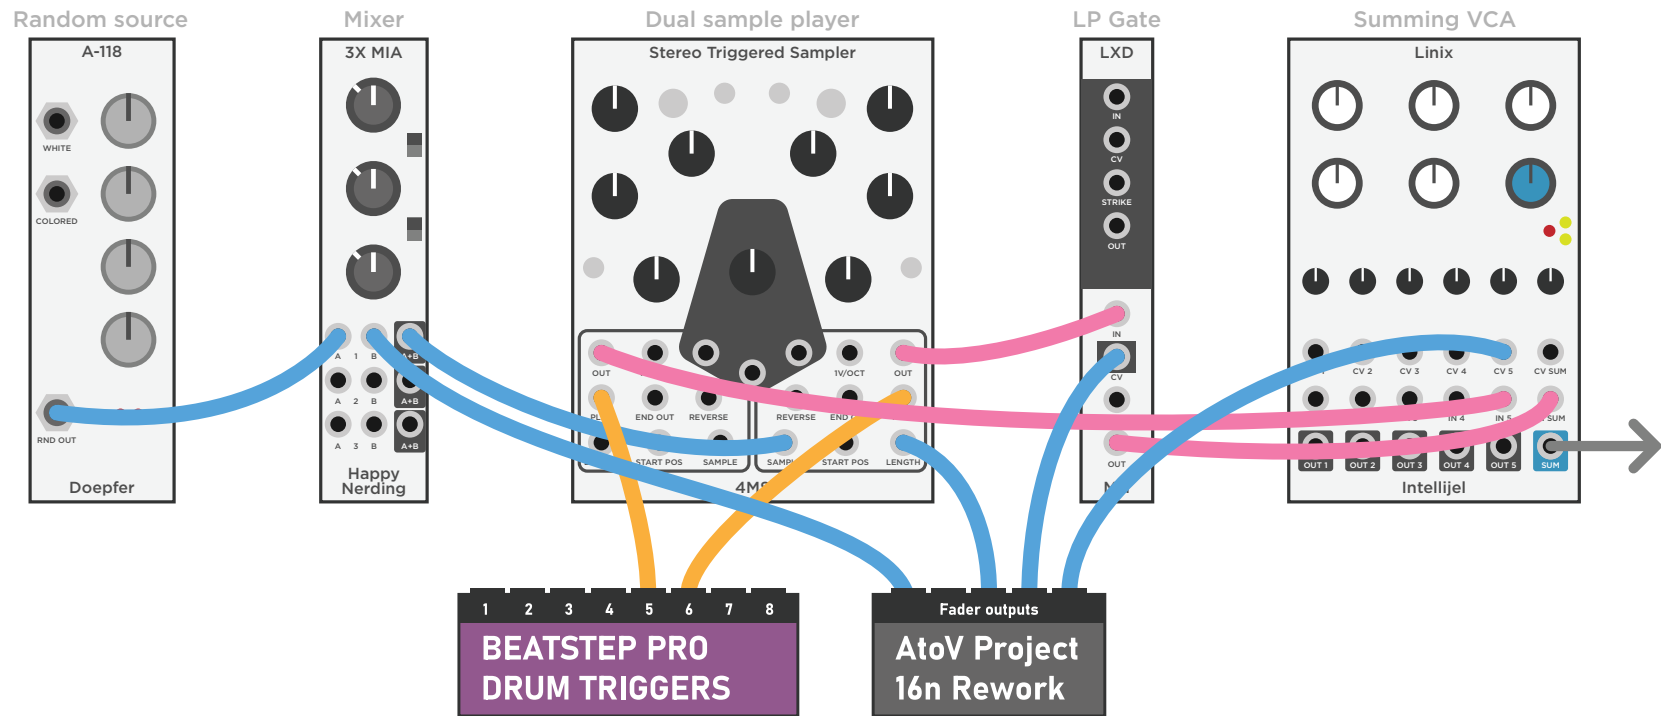

(a)

a - I use the two sides of the 4MS stereo triggered sampler as independent sample players, each receiving their own trigger from the Beatstep Pro. In this setup I use one of them just to trigger a single sample, like a clap, stabby hit, kick drum, or longer noisy field recording.

For the other sampler I like to send a random voltage through an attenuator, mixed with a fader from the 16n to the sample select. This way I can control the selected sample, and if I want, open the attenuator a bit, and allow some random sample selection. This works great for short percussive sounds.


One of the outputs goes directly to the Linux, the other passes through the second low pass gate of the Make Noise LxD. Both get a dedicated fader from the 16n rework so I can control the volume of both sounds. I also like to send faders to the sample length. These sample players alone can create a very wide variety of sounds.

Techno Live Patch

Melodic Voice 1

MONOTRAIL TECH TALK

Audio
Control Voltage
Trigger / Gate

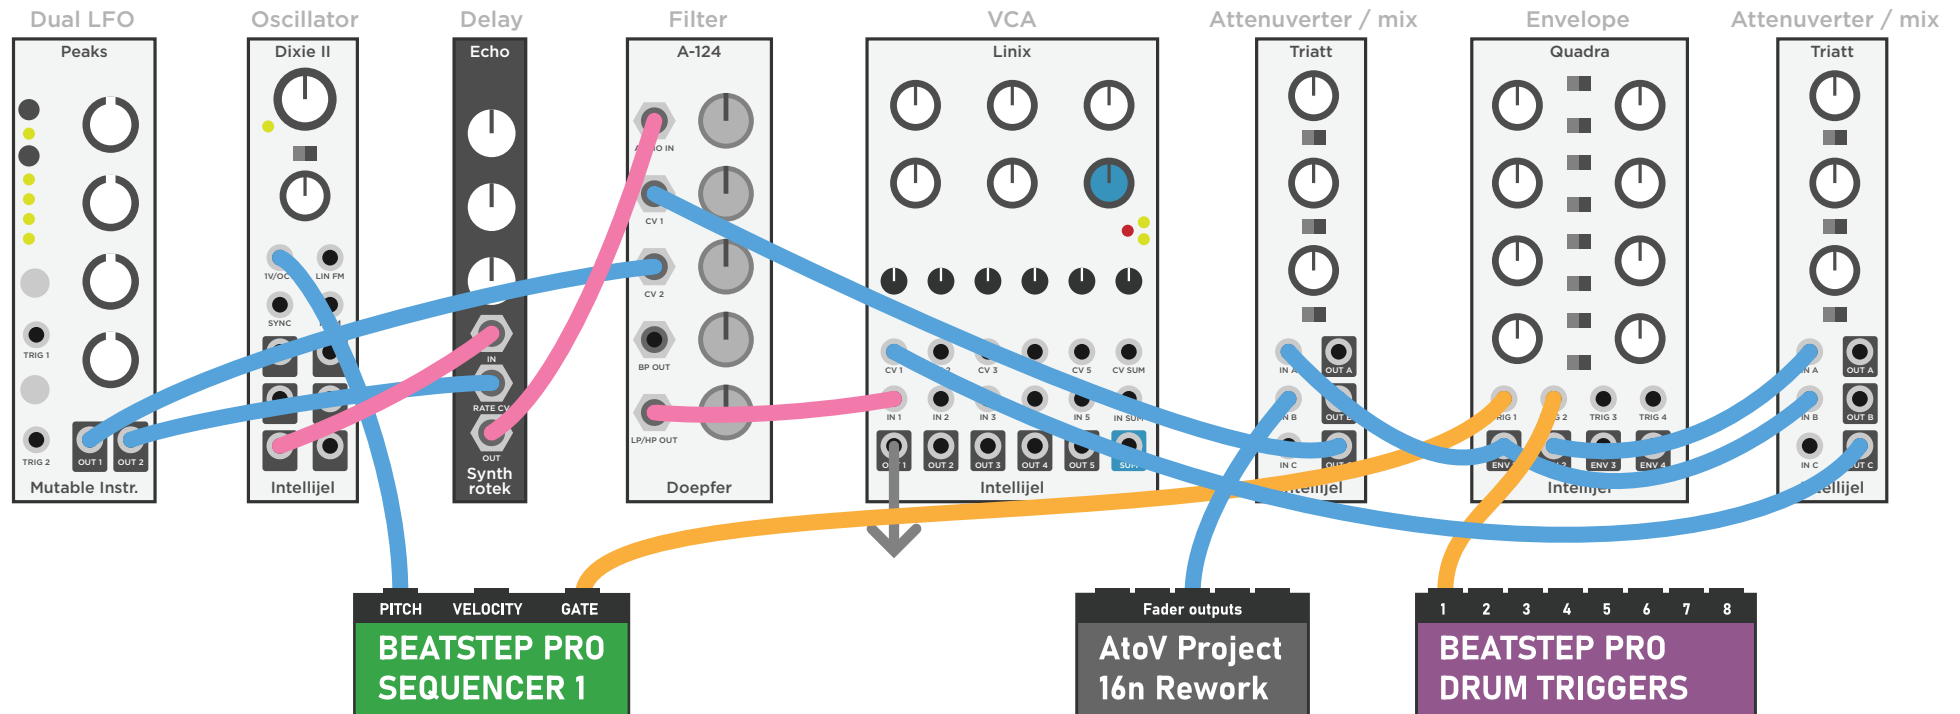

(a)

a - The first melodic voice is made up with the Intellijel Dixie II, through the synthrotek echo, the Doepfer Wasp filter, and then a VCA on the Intellijel Linux. From there it goes to its own channel on an outboard mixer.

The Beatstep Pro's first melodic sequencer sends a 1v/oct signal to the Dixie II, as well as a trigger to a simple attack decay envelope on the Intellijel Quadra. This envelope is mixed with a fader from the 16n Rework before it's sent to the Filter. This way you can use either the envelope, the fader, or both, to open the filter.

A copy of the trigger going to the kick triggers a second envelope on the Quadra, which is mixed in a Triatt with a copy from the main envelope, before going to the Linux VCA. The second envelope is inverted and used to create a sidechain effect on baselines.


For modulation, I send a slow random voltage from the Peaks to the Wasp Filter. And another random voltage to the Synthrotek Echo. In this setup the Echo is not used as a delay, but rather to create a sort of slightly detuned stacked oscillator sound, using fast delay times.

Techno Live Patch

Melodic Voice 2

MONOTRAIL TECH TALK

Audio
Control Voltage
Trigger / Gate

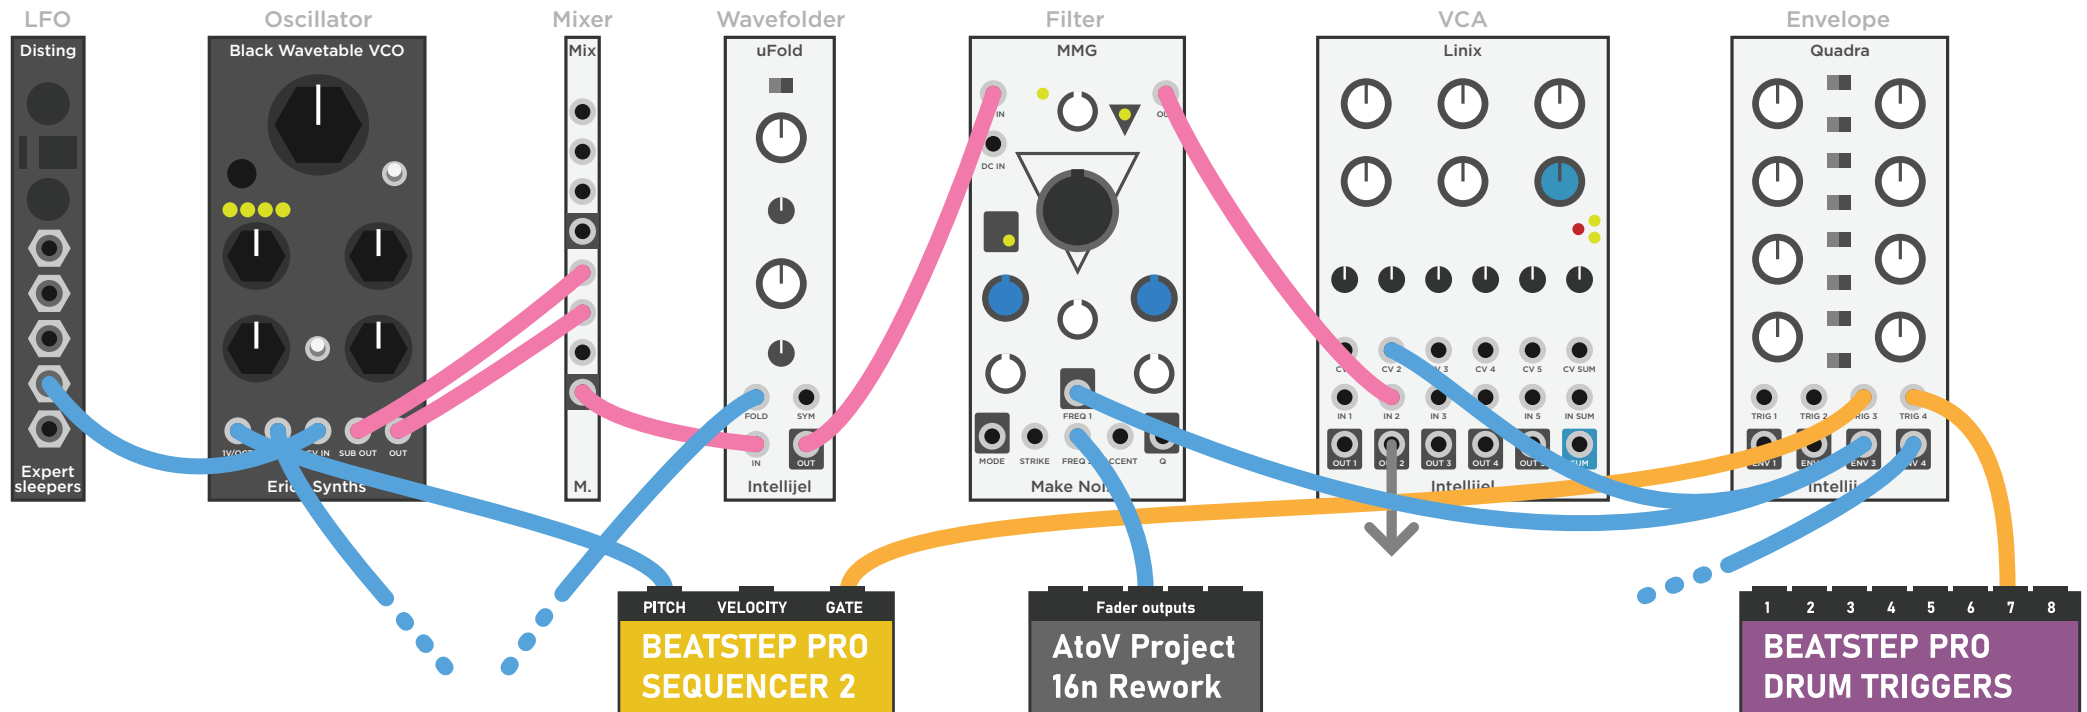

(a)

a - The second melodic voice is made with a mix from both outputs of the Erica synths Black Wavetable VCO, through the Intellijel microfold wavefolder, the Make Noise Multimode Gate, and finally, the Intellijel Linux. From there it goes to its own channel on an outboard mixer.

The second melodic sequencer of the Beatstep Pro controls the 1v/oct of the wavetable VCO, and triggers a simple envelope on the Quadra, going to the Make Noise filter and the Linux VCA. This voice is often used a bit more static, but I like to have an audio rate LFO going to the FM input on the wavetable VCO.




I also use a looping envelope from the Quadra, which I can plug either in the Wavetable oscillators waveshape input, or the wavefolders fold input. All have their own attenuator, so it's easy to control the amount of modulation on those. I can have the envelope running free, or have it triggered from the Beatstep Pro for rhythmic modulation.

The 16n Rework is used in the same way as the other voice here. Just one fader directly to the filter, but no sidechain on this voice.

Techno Live Patch

Flowchart

- Audio
- Control Voltage
- Trigger / Gate

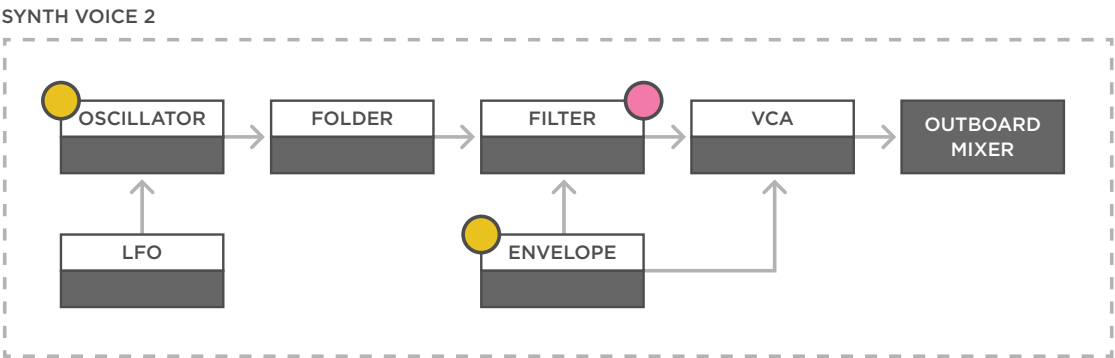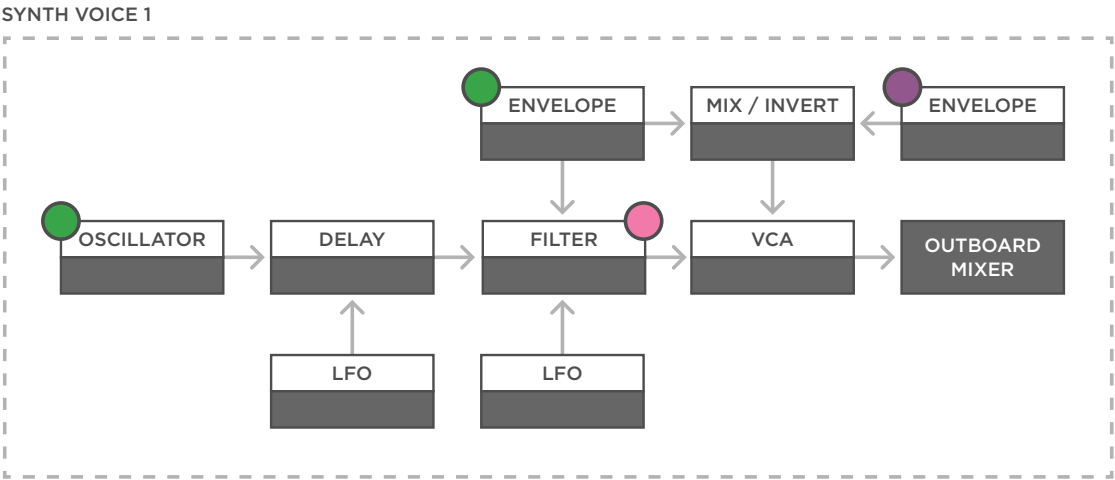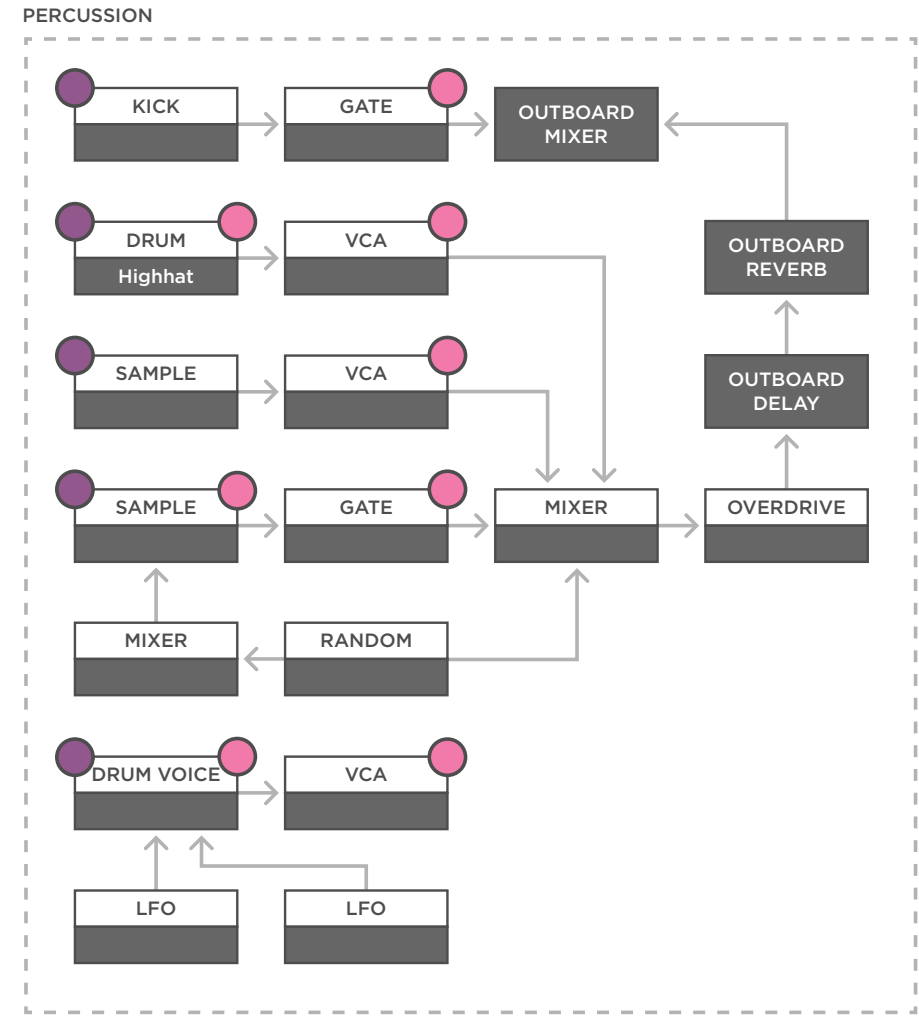

- Beatsstep PRO - Triggers
- Beatstep PRO - Sequencer 1
- Beatstep PRO - Sequencer 2
- AtoV Project 16n Rework - Fader output