

eDP 30Pin LCD Driver Board Datasheet


(DC12V + HDMI + TYPE C)

Document Classification: Public Document

PCB Model – 800512-V2

Document translated from Chinese by Micro Robotics (JC)

Board Release Date: 2025-06-02

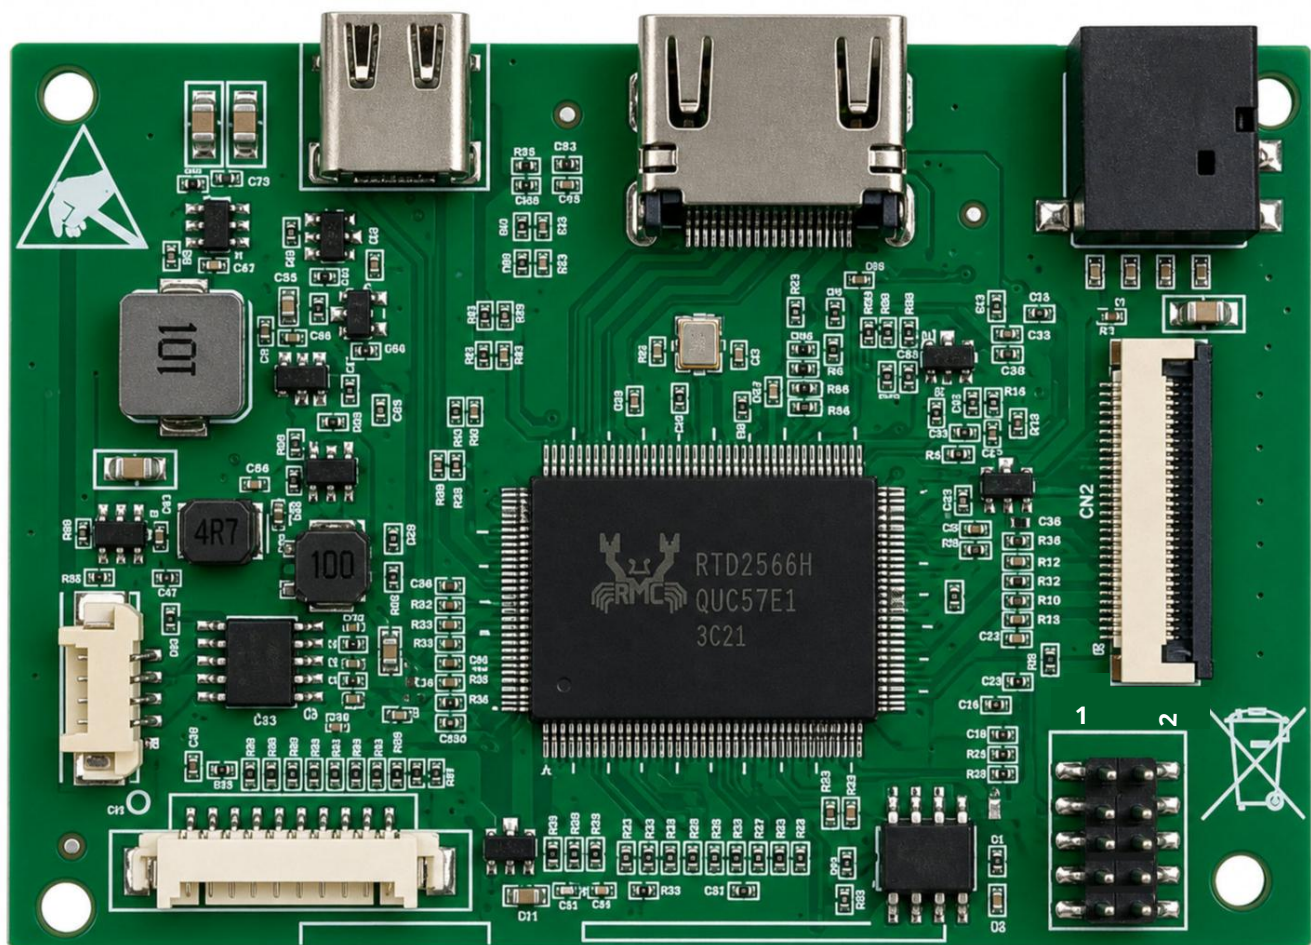


1. Product Specification

- **Dual input options:** 1× HDMI + Type-C signal input
- HDMI Support: **HDMI 1.4 (1080P 1920 x 1200 + Video + Audio over HDMI cable)**
- USB-C Support: **Type-C supports full-function input.** (Video over USB-C (DisplayPort Alt Mode))
- Wide Supply Range: 12V (Range **5V–15V**)

(Note: Ensure compatibility with external device voltage requirements to avoid damage. This voltage range applies only to the driver board.)


- **Audio: Audio Output power: 2W × 2**
- **Standard eDP 30-pin output**, supporting resolutions up to **1920 × 1200**
- **Standard full-size HDMI connector** (universal interface)
- Built with **high-temperature-resistant components**, suitable for long-term use in high-temperature environments *(ensure proper ventilation)*
- **Supports remote control function**
- PCB made of **FR4 material, 1.6 mm thickness**, providing excellent mechanical strength
- Features **four mounting holes**, each with a **3 mm diameter**
- **Supports multi-language OSD (On-Screen Display)**

2. Board Layout

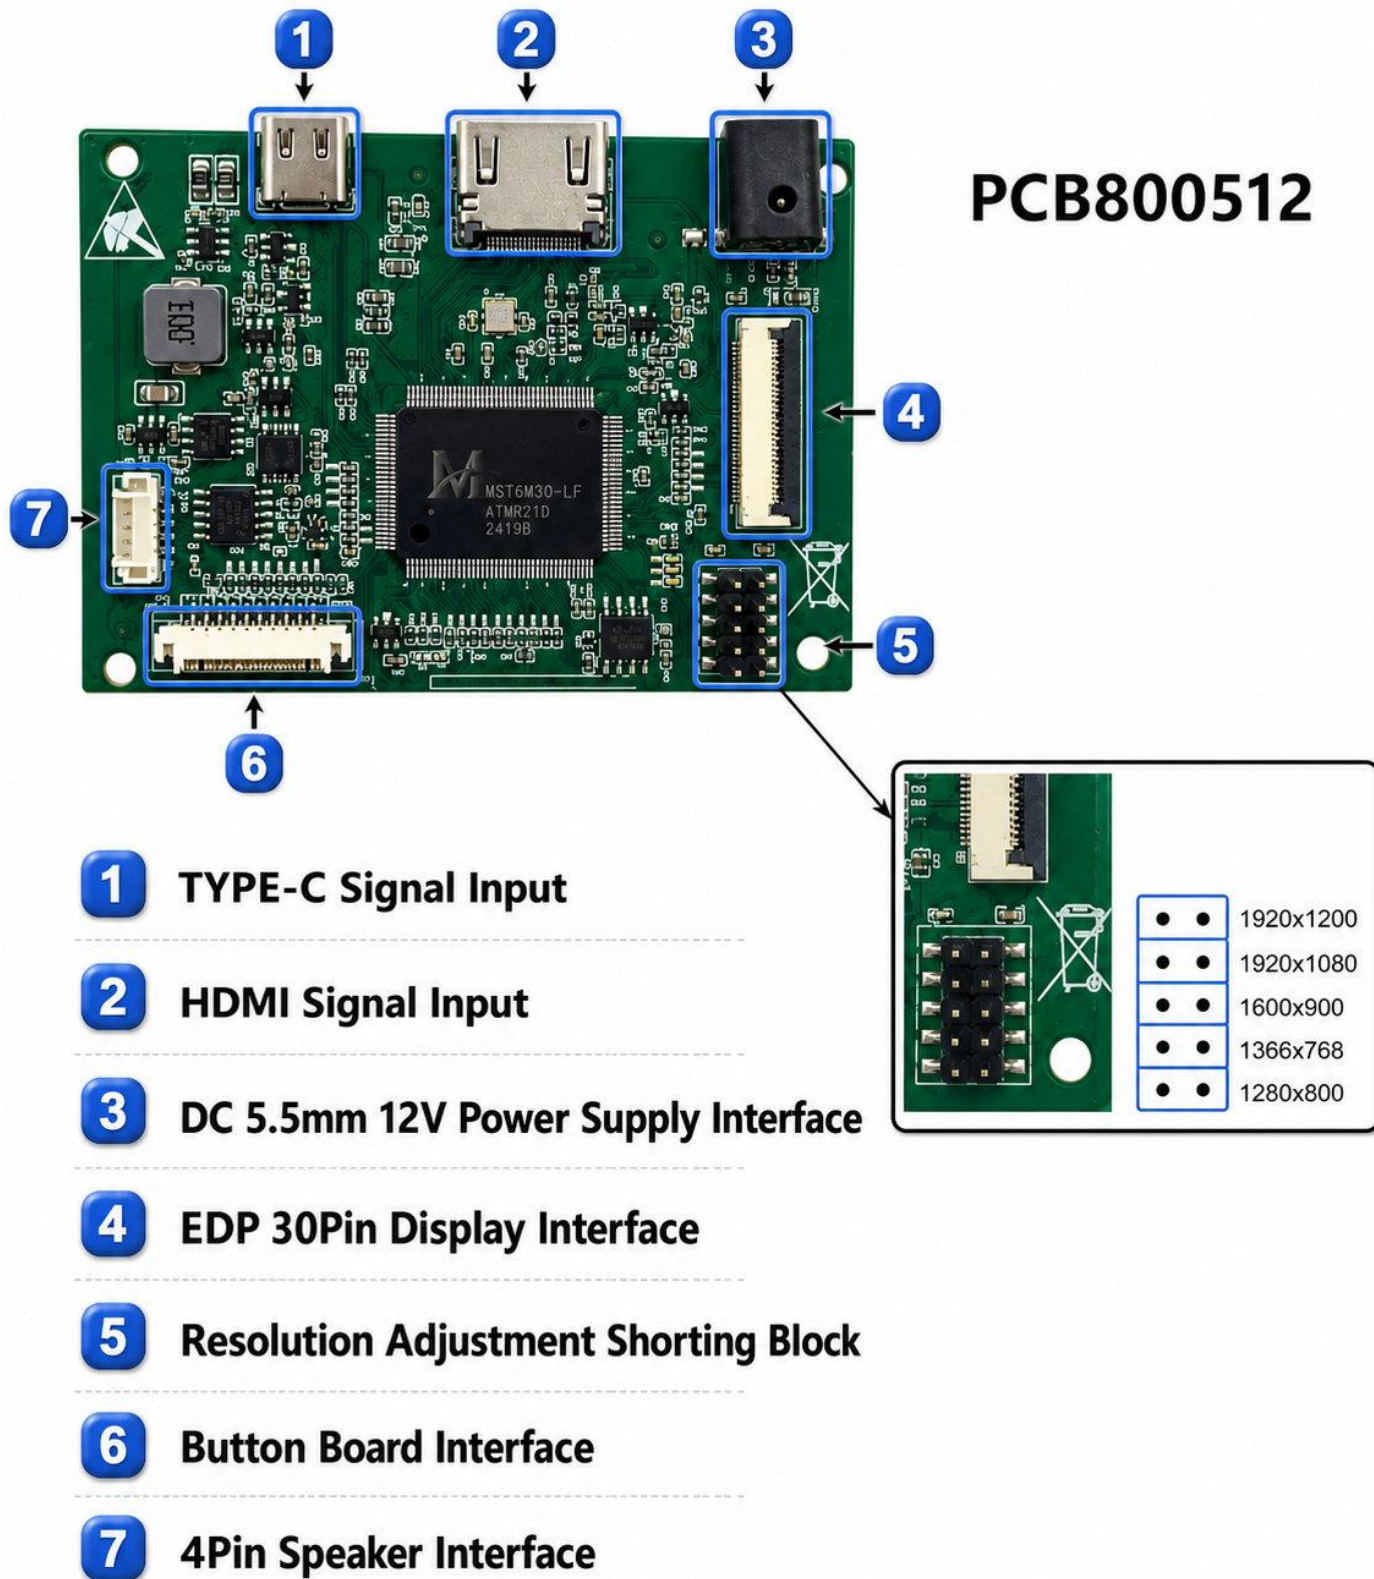

3. Connections and Connectors

30Pin EDP Universal Driver Board

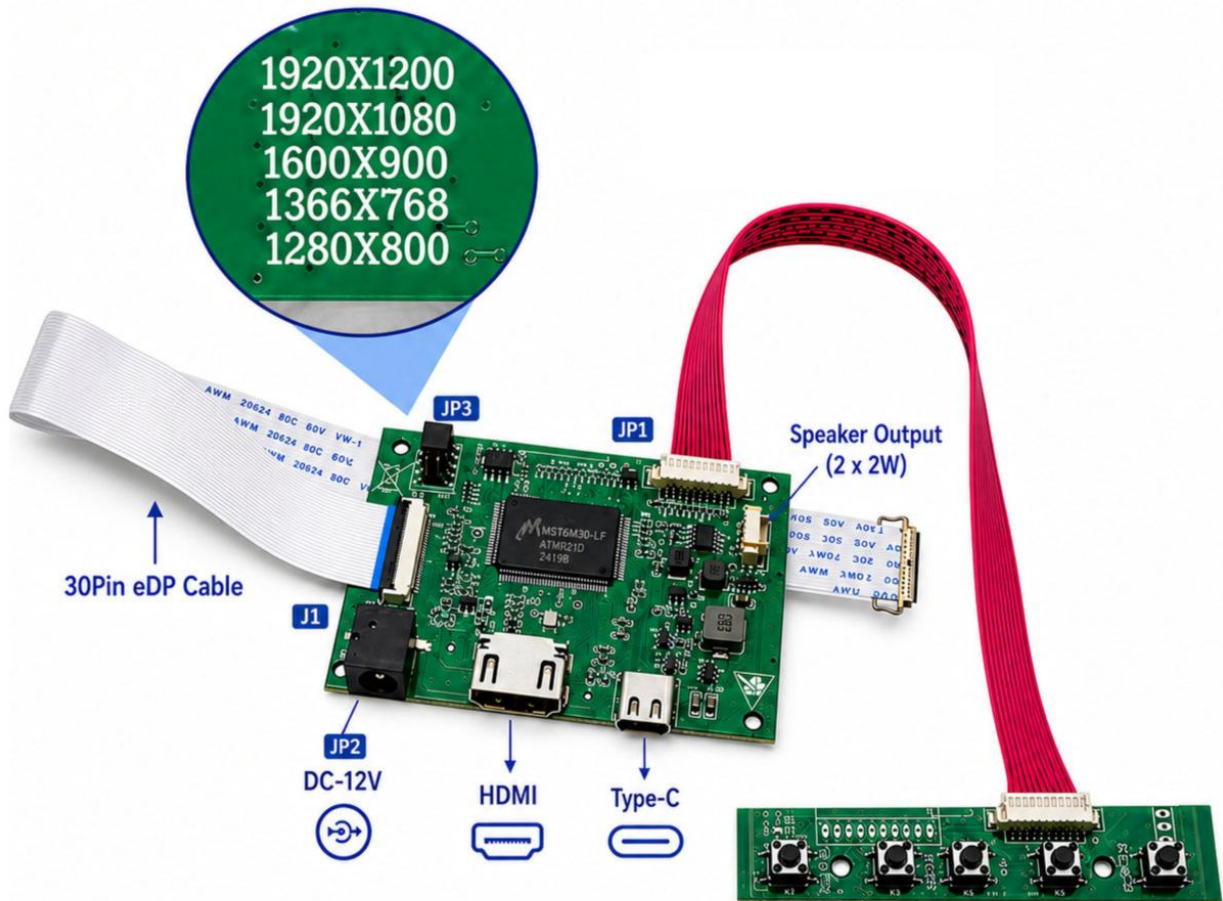

No Programming Required

Just Set the Screen Parameters
with the DIP Switch



Support 11.6" - 17.3"
EDP Screens



Universal Compatibility



Plug & Play



High Performance



Stable & Reliable

4. JP1 - Button Board and Remote-Control Input Interface

PIN #	SIGNAL NAME	FUNCTION DESCRIPTION
1	3.3V	Remote control power supply (Actual 3.3V)
2	GND	System Ground
3	IR	Infrared Remote Input signal
4	POWER	System Power ON/OFF function
5	MENU	Menu display / Navigation
6	+	Increment / Volume Up / Up
7	-	Decrement / Volume Down / Down
8	SOURCE	Input Signal Source switching
9	LED-R	Red Status LED Indicator
10	LED-G	Green Status LED Indicator

Connector Type: Pitch 1.25mm 10-Pin

AMP OUT 4PIN

PIN #	SIGNAL NAME	FUNCTION DESCRIPTION
1	LOUT-	Left Speaker -
2	LOUT+	Left Speaker +
3	ROUT-	Right Speaker -
4	ROUT+	Right Speaker +

Connector Type: Pitch 1.25mm 4-Pin


J2-DCIN

PIN #	SIGNAL NAME
1	+12V
2	+12V
3	GND
4	GND


30 Pin eDP Connector

PIN #	SIGNAL NAME	DESCRIPTION
1	NC-RESERVED	Reserved for LCD manufacture's use
2	H_GND	High Speed Ground
3	Lane1_N	Complement Signal Link Lane 1
4	Lane1_P	True Signal Link Lane 1
5	H_GND	High Speed Ground
6	Lane0_N	Complement Signal Lane 0
7	Lane0_P	True Signal Link Lane 0
8	H_GND	High Speed Ground
9	AUX_CH_P	True Signal Auxiliary Channel.
10	AUX_CH_N	Comp Signal Auxiliary Channel.
11	H_GND	High Speed Ground
12	LCD_VCC	LCD logic and driver power
13	LCD_VCC	LCD logic and driver power
14	LCD_Self_Test or NC	LCD Panel Self Test Enable
15	LCD_GND	LCD logic and driver ground
16	LCD_GND	LCD logic and driver ground
17	HPD	HPD Signal pin
18	BL_GND	Backlight ground
19	BL_GND	Backlight ground
20	BL_GND	Backlight ground
21	BL_GND	Backlight ground
22	BL_ENABLE or NC	Bright On/Off(Optional)
23	BL_PWM_DIM	System PWM signal input for dimming(Optional)
24	NC-RESERVED	Reserved for LCD manufacture's use
25	NC-RESERVED	Reserved for LCD manufacture's use
26	BL_PWR	Backlight power
27	BL_PWR	Backlight power
28	BL_PWR	Backlight power
29	BL_PWR	Backlight power
30	NC-RESERVED	Reserved for LCD manufacture's use

SET RESOLUTION - JUMPER JP3

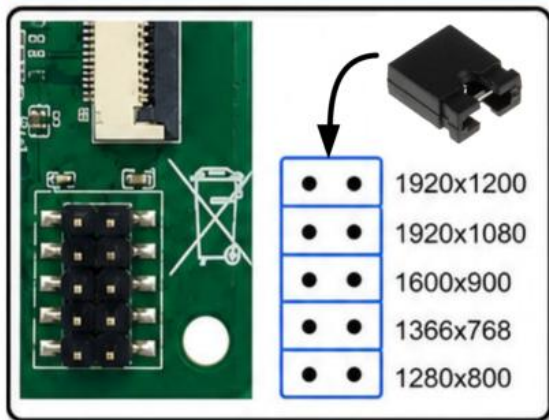

5. Board Dimensions

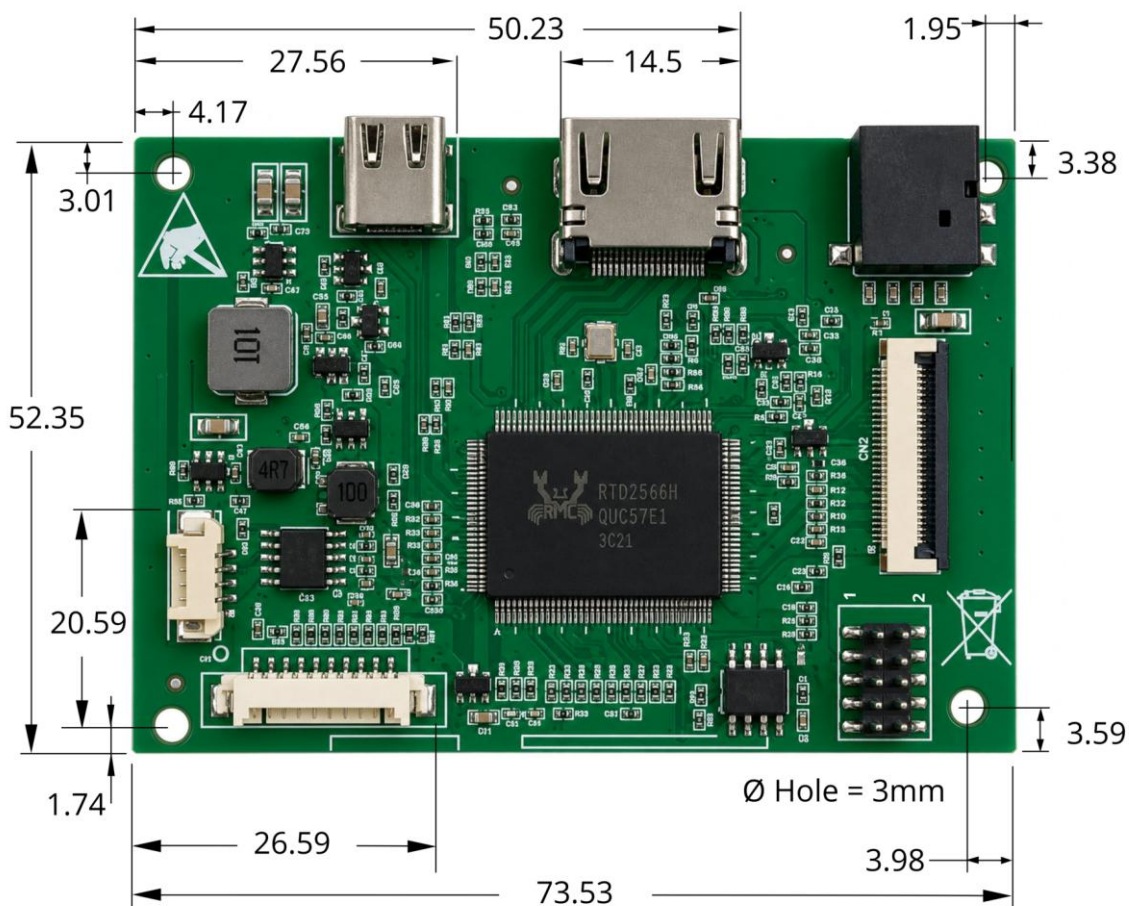

For technical corrections or documentation errors, please contact:

admin@microgroup.co.za