
GPA series intelligent signal isolation distributor

Provide isolated working power to the transmitter in the field, and at the same time detect the current / voltage signal in the loop. After transformation, the isolated current / voltage signal is output. The device has the advantages of fast response speed, low power consumption, and good temperature characteristics.

λ It can be used in conjunction with modular instruments and DCS, PLC and other systems to provide signal isolation, signal conversion, signal distribution, and signal processing functions for field instruments, which enhances the anti-interference ability of the automatic control system in the industrial production process, ensuring the system's Stability and reliability.

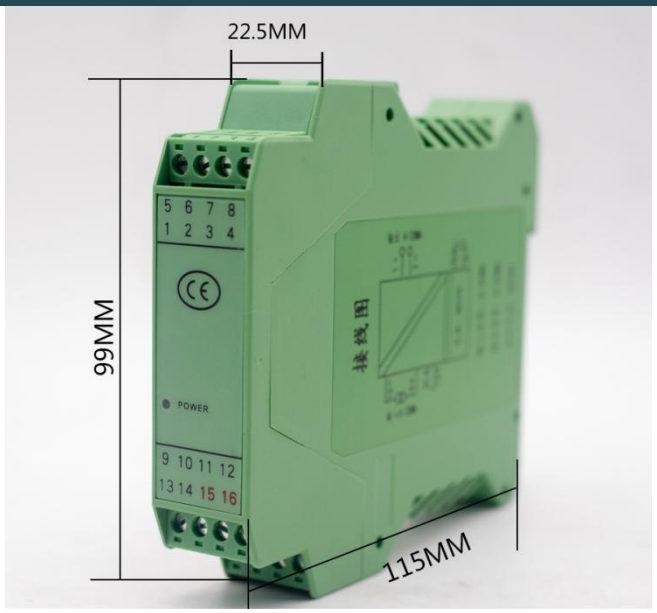

Technical Parameters

Isolated transmission accuracy	±0.1%F.S(25℃±2℃)			
Response time	≤50mS			
Input impedance	≤100Ω(when input current) ≥300KΩ(when the input is voltage)			
Temperature drift	40ppm/℃			
Distribution output voltage	No-load voltage ≤26V, full-load voltage ≥23V			
Output load capacity	0（4）mA~20mA：≤550Ω:; 0（1）V~5V：≥1MΩ; 0V~10V：≥2MΩ			
Power supply	18~32VDC(typical 24V DC) 85~265VAC /DC			
Full load power consumption	1 input 1 output	1 input 2 output	1 input 4 output	2 input 2 output
24V DC	0.3W	0.5W	1.0W	0.6W
220V AC	0.6W	1.0W	1.5W	1.2W
Insulation resistance	≥ 100M Ω , 600VDC (between input / output / power)			
Dielectric strength (leakage current 1mA, test time 1 minute)				
≥1500V AC/DC(between input / output / power)				
Ambient temperature during operation	−20℃～+60℃			
Electromagnetic compatibility	IEC 61000-4			

Panel indicator

PWR: Power indicator (green).

Installation method

35mm rail installation, please pay attention to the card is stable and firm when installing; Please install it as vertically as possible to facilitate the heat dissipation inside the instrument.

Product Model List

HDTD-	X	X	X	X	
Number of channels	1				1 input 1 output
	2				1 input 2 output
	3				1 input 3 output
	4				1 input 4 output
	5				2 input 2 outout
	7				2 input 4 output
Input signal		1			4~20mA
		2			0~20mA
		4			0~75mV
		5			0~5V
		6			0~10V
		S			Other signal
Output signal			1		4~20mA
			2		0~20mA
			5		0~5V
			6		0~10V
			S		Other signal
Power supply				D	DC 24V default
				A	85-265VAC/DC
				N	DC12V


Product selection example:

Example: HDGPA-211, one input and two output, input 4 ~ 20mA, output is 4-20mA, DC24V power supply


Huaibei Huadian Automation Technology .,Ltd **Mob:18605613933** **Tel:0561-5237771**

GPA series intelligent signal isolation distributor


wiring diagram

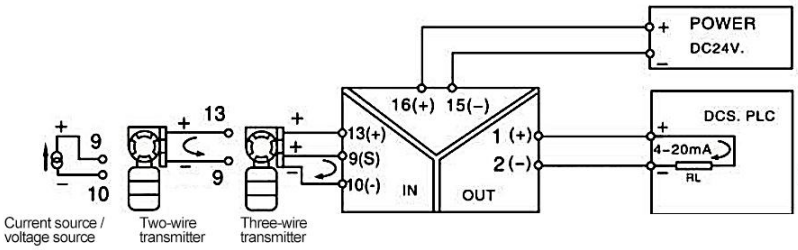


One in one out

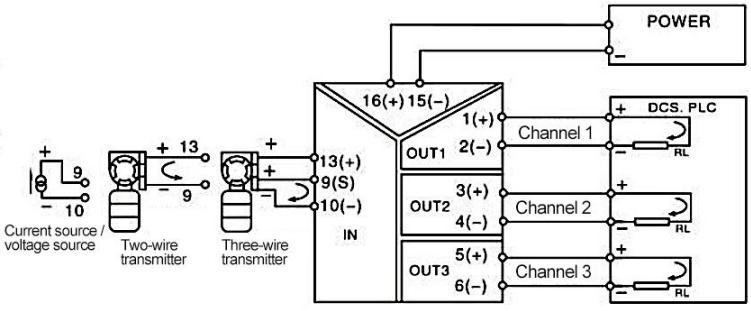


One in and three out

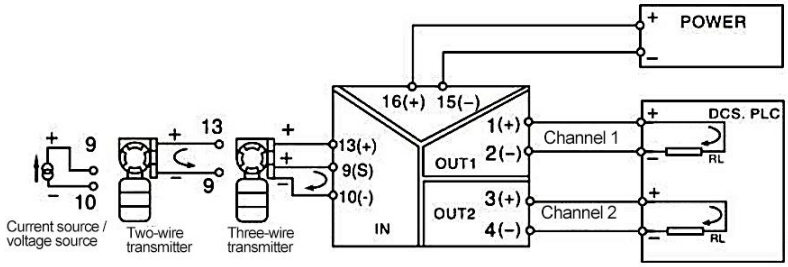


One in one out

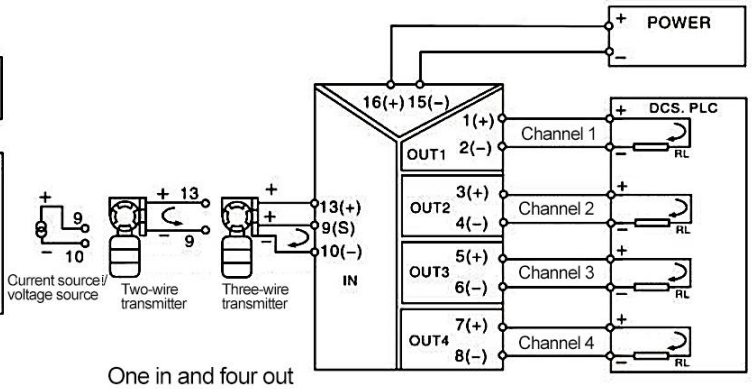

One in and four out

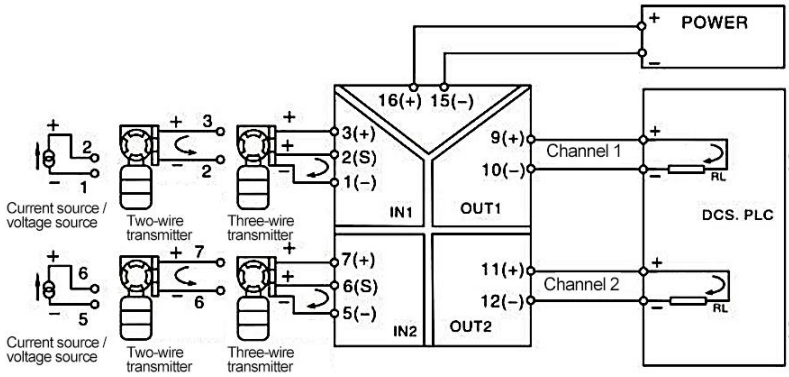

Two in and two out

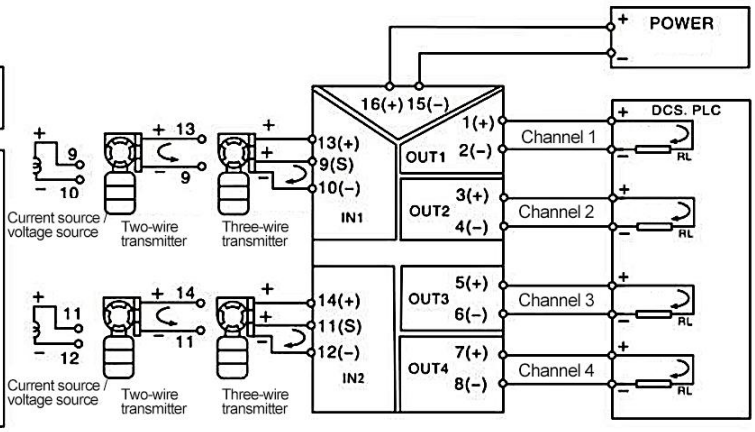

Two in and four out