


PCB-01 J7 -> USB-UART

Solder the five board leads with all power OFF. Board power stays separate.

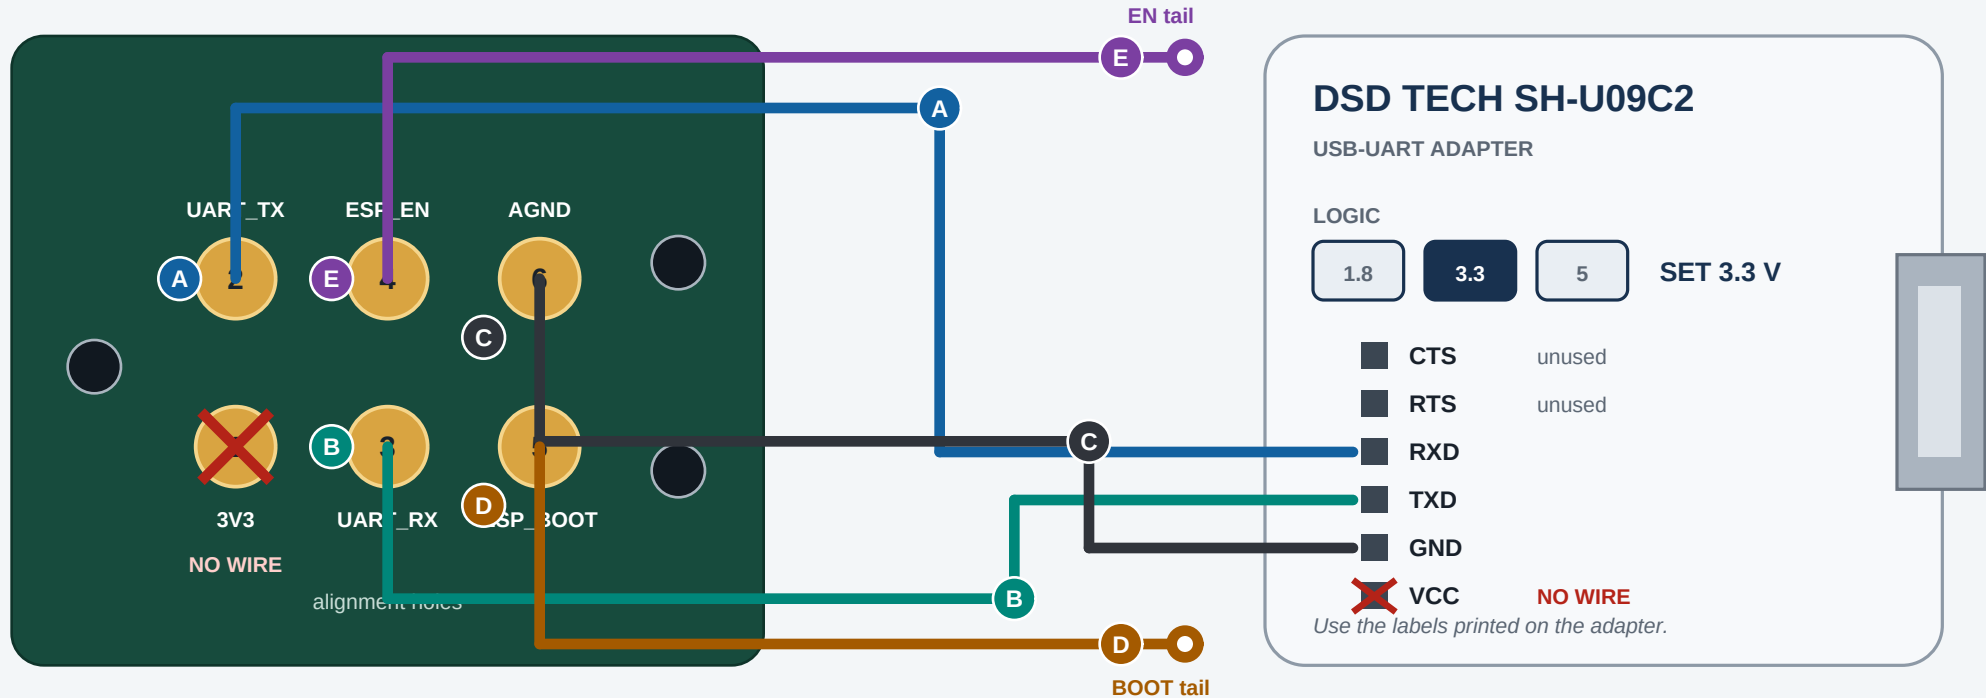

WIRE LEGEND (write your colours)

- A** J7.2 TX -> adapter RXD
colour: _____
- B** J7.3 RX -> adapter TXD
colour: _____
- C** J7.6 AGND -> adapter GND
colour: _____
- D** J7.5 BOOT -> loose service tail
colour: _____
- E** J7.4 EN -> loose service tail
colour: _____

BOARD END

- Power OFF and discharged before attaching or moving wires.
- Strip 0.5-1 mm. Flux and tin the pad and wire separately.
- Lay the wire flat on the pad. Hold still and touch the iron briefly.
- Magnify and inspect. Then check continuity and every adjacent pad.

ADAPTER END + FLASH

- Push female Dupont sockets onto RXD, TXD and GND by printed label.
- Set logic to 3.3 V. Leave VCC, CTS and RTS empty.
- Cold ROM boot: power off, join D to C, power board, then release D.
- E is the reset tail. Attach or move Dupont wires only with power off.