

TABLE OF CONTENTS

TABLE OF CONTENTS 1

1- REPLACING MICROPHONE 2

 1-1 Removal of Old Microphone 2

 1-1-2 Removal of Rear Microphone 3

 1-1-3 Removal of Front Microphone..... 5

 1-2-1 Installation of New Rear Microphone..... 6

 1-2-2 Installation of New Front Microphone 6

Description - Procedure for replacing the front and rear patient microphone.

1- REPLACING MICROPHONE

1-1 Removal of Old Microphone

1. Lock out and tag out circuit breaker MR1 A14 CB6 at rear of RF/Pen Cabinet (MR1) on magnet enclosure power supply (MEPS) module.

For **RF/Pen II** and **RF/PDU Cabinet**: Lock out and tag out circuit breaker MR1 A20 CB4 at rear of RF/Pen II and RF/PDU Cabinet on System Support Module (SSM).


(Refer to CD-ROM *Dir. 2187583-3 [or -2], MR Release Signa 5x/8x Service Methods, Renewal Parts and Service Tools*, Procedure for Safety, Section 6, OSHA LOCKOUT/TAGOUT REQUIREMENTS.)

2. Verify that voltage between MR1 A14 TP1 (+) and TP14 (–) is 0 Vdc.

For RF/Pen II and RF/PDU Cabinet, Verify voltage between MR1 A20 TP1 (+) (Dock) and TP14 (–) (Dock RTN) is 0 Vdc.


1-1-2 Removal of Rear Microphone

1. Refer to procedure for Rear End Bell Removal Open Enclosure ME2REA9.
2. Remove (3) three screws holding speaker/microphone assembly in place.
See Illustration 1-1.

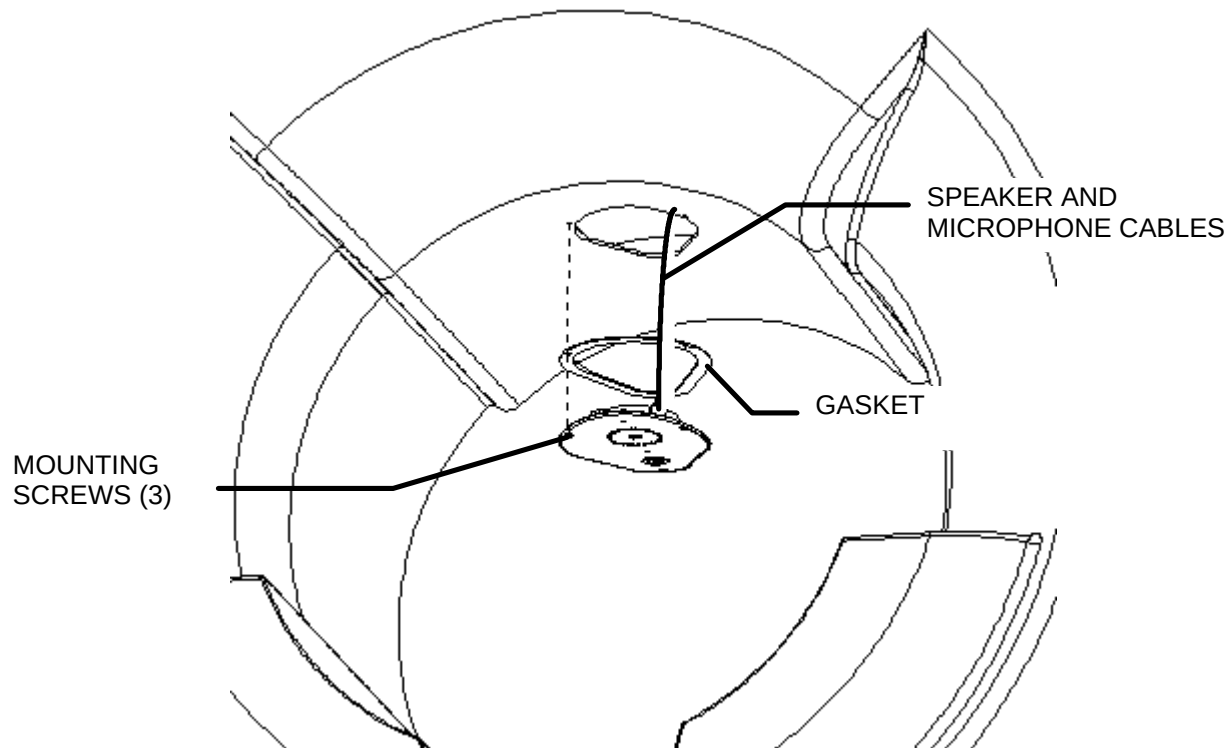


REAR VIEW OF MAGNET
ILLUSTRATION 1-1

4. Drop speaker/microphone assembly down and remove microphone from plate.
See Illustration 1-2.

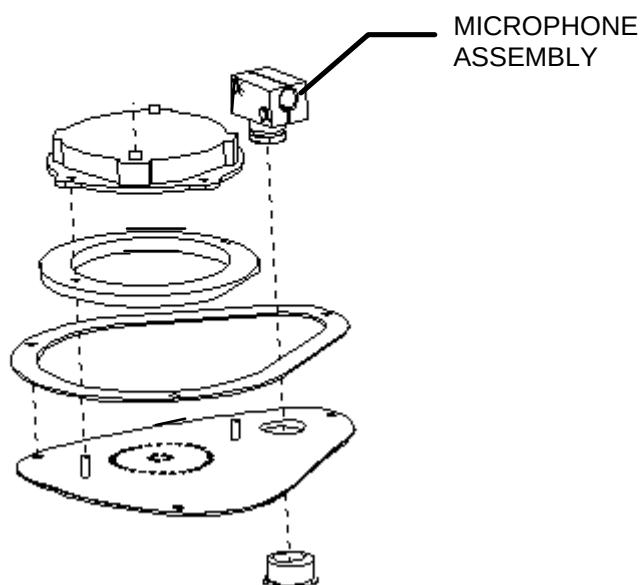

SPEAKER/MICROPHONE ASSEMBLY DETAIL
ILLUSTRATION 1-2

4. Remove microphone clamp by removing (2) two screws. See Illustration 1-3.
5. Lift Microphone and cable out of End Bell assembly paying careful attention to cable routing. See Illustration 1-3.

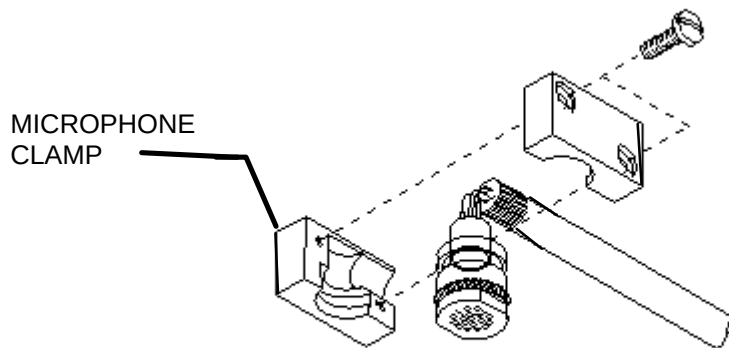


MICROPHONE REMOVAL
ILLUSTRATION 1-3

6. Locate and disconnect microphone cable on intercom board J7 or J9, located on the right side of the rear pedestal facing the magnet from the rear.

1-1-3 Removal of Front Microphone

1. Remove front end bell. Refer to procedure for front end bell removal ME2RE8.DOC.

1. Pry plastic plug concealing front microphone with a flat blade screwdriver.
See Illustration 1-4.

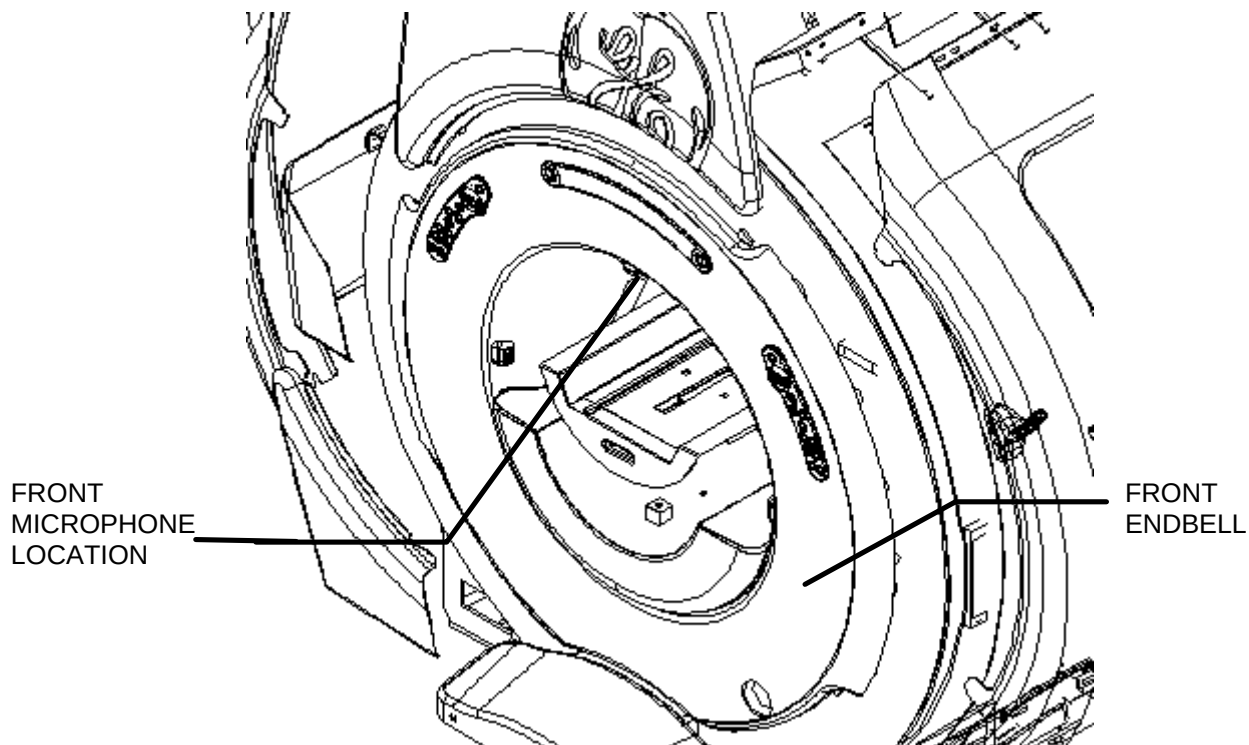

FRONT END BELL
ILLUSTRATION 1-4

2. Remove teflon tape and thermal blanket to access microphone
3. Lift microphone from end bell.
4. Disconnect other end of microphone cable at J7 or J9 at the intercom box located at the rear pedestal.

1-2-1 Installation of New Rear Microphone

1. Re-assemble microphone mount and re-install in speaker/microphone plate.
2. Connect other end of cable to intercom box J7 or J9 on rear pedestal.
3. Install speaker/microphone plate using (3) three screws removed in step 1-1-2-1.
4. Remove lock out tag out. turn on RF/PEN circuit breaker.

1-2-2 Installation of New Front Microphone

1. place new microphone in end bell and re-tape thermal blanket with tape provided with new microphone.
2. Re-tywrap microphone cable to end bell.
3. Replace front end bell.
4. Push in plastic plug removed in step 1-1-3-1.
5. Connect other end of cable to intercom box J7 or J9.
6. Remove tag-out tag from circuit breaker MR1 A14 CB6 or MR1 A20 CB4.
7. Restore power to operator button panel and display assemblies by switching on circuit breaker MR1 A14 CB6 at rear of RF/Pen Cabinet (MR1) on MEPS module.

RF/Pen II and RF/PDU Cabinet: Switch on circuit breaker MR1 A20 CB4 on the SSM at rear of RF/Pen II Cabinet or RF/PDU.

revision history

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
A	Nov 1, 1998	W. Pasciak	Initial release
B	Dec 17, 1998	W. Pasciak	Updated rear microphone removal
C	June 2, 1999	W. Pasciak	Removed Reference to string