

TABLE OF CONTENTS

TABLE OF CONTENTS 1

1- REPLACING CONTROL PANELS..... 2

 1-1 Operator Control Panels 2

REVISION HISTORY 5

Description - Procedures for replacing operator control/display hardware in the front magnet enclosure. There are (3) three control panels on the front endbell.

1- REPLACING CONTROL PANELS

1-1 Operator Control Panels

1. Lock out and tag out circuit breaker MR1 A14 CB6 at rear of RF/Pen Cabinet (MR1) on magnet enclosure power supply (MEPS) module.


For **RF/Pen II** and **RF/PDU Cabinet**: Lock out and tag out circuit breaker MR1 A20 CB4 at rear of RF/Pen II and RF/PDU Cabinet on System Support Module (SSM).

(Refer to CD-ROM *Dir. 2187583-3 [or -2], MR Release Signa 5x/8x Service Methods, Renewal Parts and Service Tools*, Procedure for Safety, Section 6, OSHA LOCKOUT/TAGOUT REQUIREMENTS.)

2. Verify that voltage between MR1 A14 TP4 (+) and TP13 (–) is 0 Vdc.


For RF/Pen II and RF/PDU Cabinet, verify that voltage between MR1 A20 TP4 (+) (SRI+24V) and TP13 (–) (SRI RTN) is 0 Vdc.

3. Each control panel has (2) two latches that are accessed with a 3mm allen wrench. Insert allen wrench into one hole in control panel and turn counter clockwise $\frac{1}{2}$ turn. Insert allen wrench into the other hole in control panel and turn counter clockwise $\frac{1}{2}$ turn.
See Illustration 1-1.

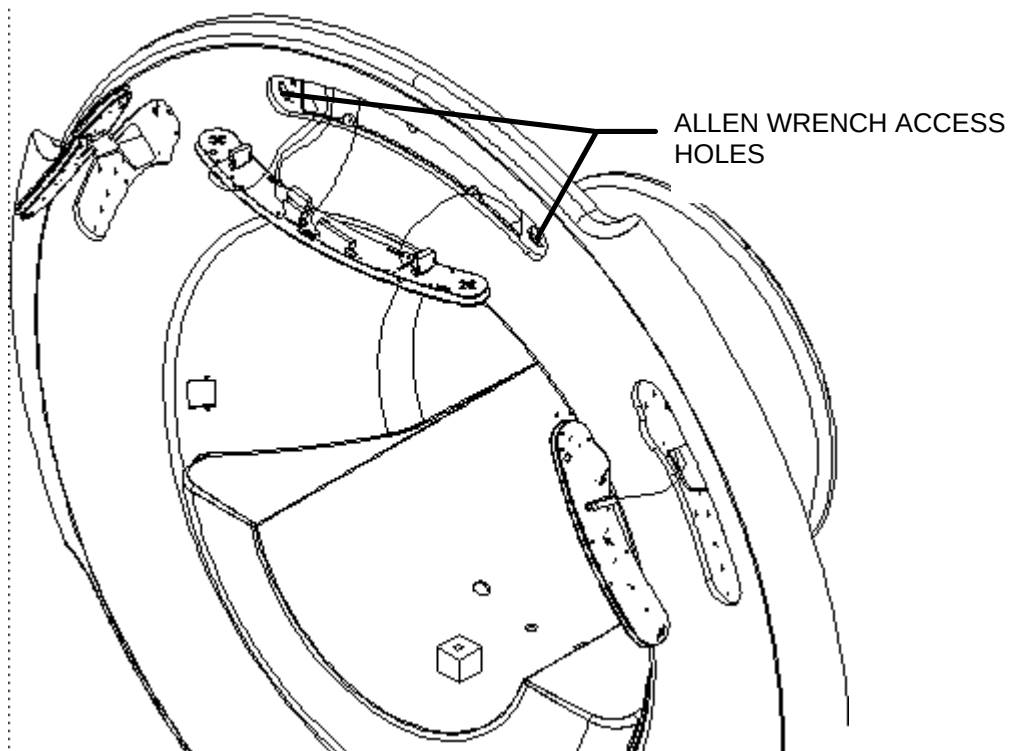

CONTROL PANEL LOCATIONS
ILLUSTRATION 1-1

4. Lift control panel out and remove SCSI type II connectors. There are (5) connectors on the middle control panel and (1) one each on the left and right control panel.
See Illustration 1-2.

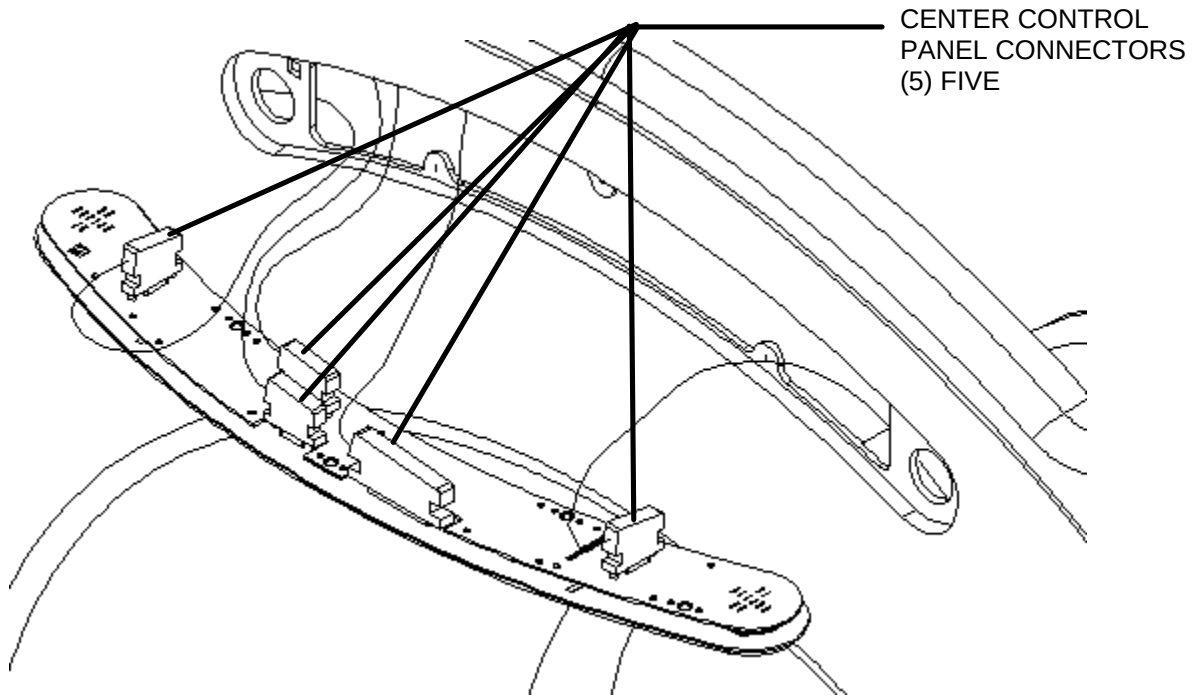

CENTER CONTROL PANEL DETAIL
ILLUSTRATION 1-2

5. Install replacement Control Panel by pushing on SCSI connectors. Great care needs to be taken when installing center Control Panel connectors so they do not get crossed.
See Illustration 1-2.
6. Reverse step 1 using 3mm allen wrench.
7. Remove tag-out tag from circuit breaker MR1 A14 CB6 or MR1 A20 CB4.
8. Restore power to operator button panel and display assemblies by switching on circuit breaker MR1 A14 CB6 at rear of RF/Pen Cabinet (MR1) on MEPS module.

RF/Pen II and RF/PDU Cabinet: Switch on circuit breaker MR1 A20 CB4 on the SSM at rear of RF/Pen II Cabinet or RF/PDU.

REVISION HISTORY

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
A	Nov 1, 1998	W. Pasciak	Initial revision
0	Feb 4, 1999	W. Pasciak	Final release