

TABLE OF CONTENTS

TABLE OF CONTENTS 1

1- COMPACT PDU INTERCONNECTS..... 2

2- COMPACT PDU COMPONENT LOCATIONS 6

REVISION HISTORY..... 12

Description - The Compact is a single-bay cabinet and the Standard PDU is a two-bay PDU cabinet. Information for the Compact PDU do not apply to the Standard PDU.

1- COMPACT PDU INTERCONNECTS

This section contains the interconnect table for power cable connections to feeders within the Compact PDU and the interconnect diagrams for the Compact PDU over temperature monitoring and emergency stop circuits.

For Compact PDU interconnects, refer to *Direction 2153389, Signa 8.x Block Diagrams and Supplemental Schematics*, Compact PDU tab.

For connections to/from the Compact PDU, you can also refer to the System Interconnect Map (provided with your system's installation manual).

Compact PDU Feeder Connections: For Signa Horizon see Table 1 below.

TABLE 1
SIGNA HORIZON COMPACT PDU FEEDER CONNECTIONS

FUNCTION	TB10 (A2) TERMINAL	CIRCUIT BREAKER	OUTPUT VOLTAGE	OUTPUT PHASES
GRADIENT AMPLIFIER CABINET #1	1	CB 6 WITH SHUNT	208	3
GRADIENT AMPLIFIER CABINET #1	2	CB 6 WITH SHUNT	208	3
GRADIENT AMPLIFIER CABINET #1	3	CB 6 WITH SHUNT	208	3
GRADIENT AMPLIFIER CABINET #2 (OPTION)	4	CB 7 WITH SHUNT	208	3
GRADIENT AMPLIFIER CABINET #2 (OPTION)	5	CB 7 WITH SHUNT	208	3
GRADIENT AMPLIFIER CABINET #2 (OPTION)	6	CB 7 WITH SHUNT	208	3
GRAM Cabinet (OPTION)	7	CB 13 WITH SHUNT	208	3
GRAM Cabinet (OPTION)	8	CB 13 WITH SHUNT	208	3
GRAM Cabinet (OPTION)	9	CB 13 WITH SHUNT	208	3
RF AMPLIFIER CABINET	10	CB 17 WITH SHUNT	208	3
RF AMPLIFIER CABINET	11	CB 17 WITH SHUNT	208	3
RF AMPLIFIER CABINET	12	CB 17 WITH SHUNT	208	3
OPERATOR WORK STATION	13 14	CB 1	120	1

	15			
SYSTEM CABINET	16	CB 11	208	3
SYSTEM CABINET	17	CB 11	208	3
SYSTEM CABINET	18	CB 11	208	3
MULTI-FORMAT CAMERA	19	CB 2	120	1
HEAT EXCHANGER	20	CB 3	120	1
SPARE (OPTION)	21	CB 4	120	1
OPTIONS	22	CB 5	120	1
OPTIONS	23	CB 5	120	1
	24			
SPARE (OPTION)	25	CB 12	120	1
RESISTIVE SHIM POWER SUPPLY	26	CB 18	208	2
OPTION)		WITH		
		SHUNT		
RESISTIVE SHIM POWER SUPPLY	27	CB 18	208	2
(OPTION)		WITH		
		SHUNT		
OPERATOR WORK SPACE	31	CB 8	120	1
SERVICE OUTLETS	32	CB 9	120	1
SUPERCONDUCTING SHIM SERVICE	33	CB 16	208	3
RECEPTACLE				
SUPERCONDUCTING SHIM SERVICE	35	CB 16	208	3
RECEPTACLE				
SUPERCONDUCTING SHIM SERVICE	34	CB 16	208	3
RECEPTACLE				
MAGNET SERVICE RECEPTACLE	36	CB 15	208	3
MAGNET SERVICE RECEPTACLE	37	CB 15	208	3
MAGNET SERVICE RECEPTACLE	38	CB 15	208	3
L1			INPUT SUPPLY	
			3 PHASE	
L2			INPUT SUPPLY	
			3 PHASE	
L3			INPUT SUPPLY	
			3 PHASE	
N			INPUT SUPPLY	
			3 PHASE	

See Illustration L2741A below or Illustration L4795A under Illustration L2741A TB 10 (A2) and Bus Bars.

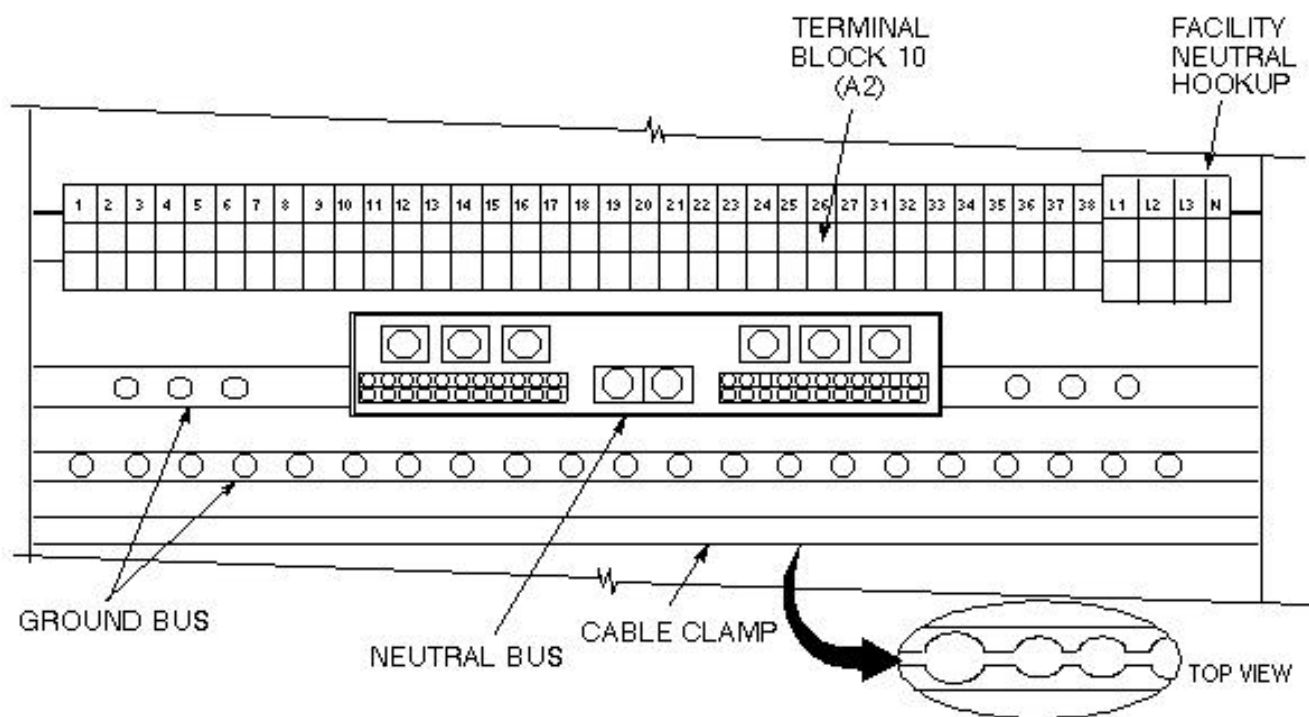


ILLUSTRATION L2741A
TB 10 (A2) AND BUS BARS - MODELS 46-317099P1 THRU P4


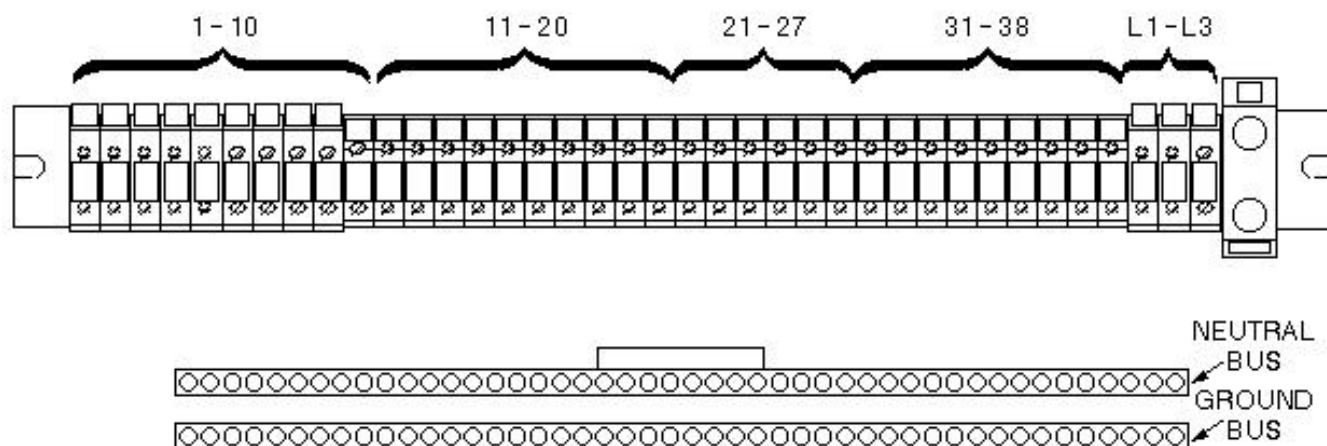


ILLUSTRATION L4795A
TB10 (A2) AND BUS BARS MODELS 46-317099P8 THROUGH P22

See Illustration L2742A below, Compact PDU Over temperature Monitoring Interconnect.

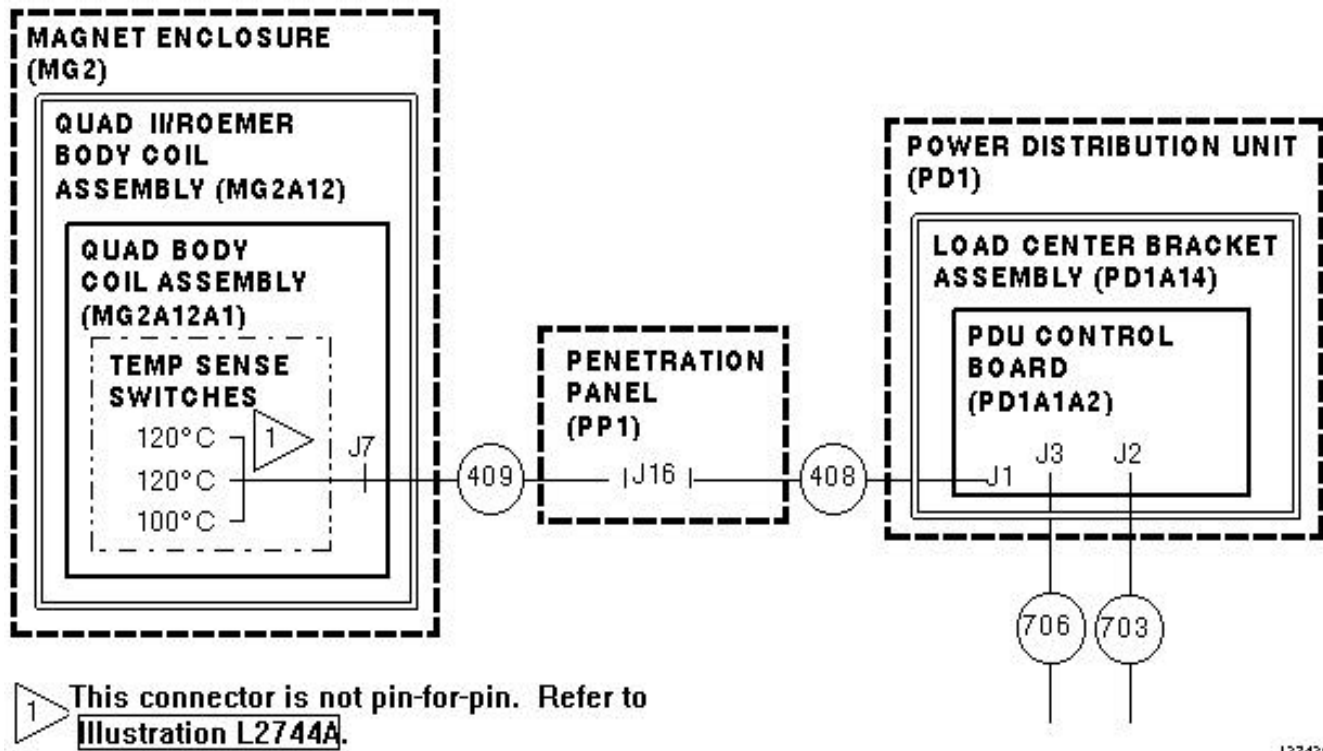

127429

ILLUSTRATION L2742A
COMPACT PDU OVERTEMPERATURE MONITORING INTERCONNECT

See Illustration L2744A below, Coil and System Cabinet Temperature Switches.

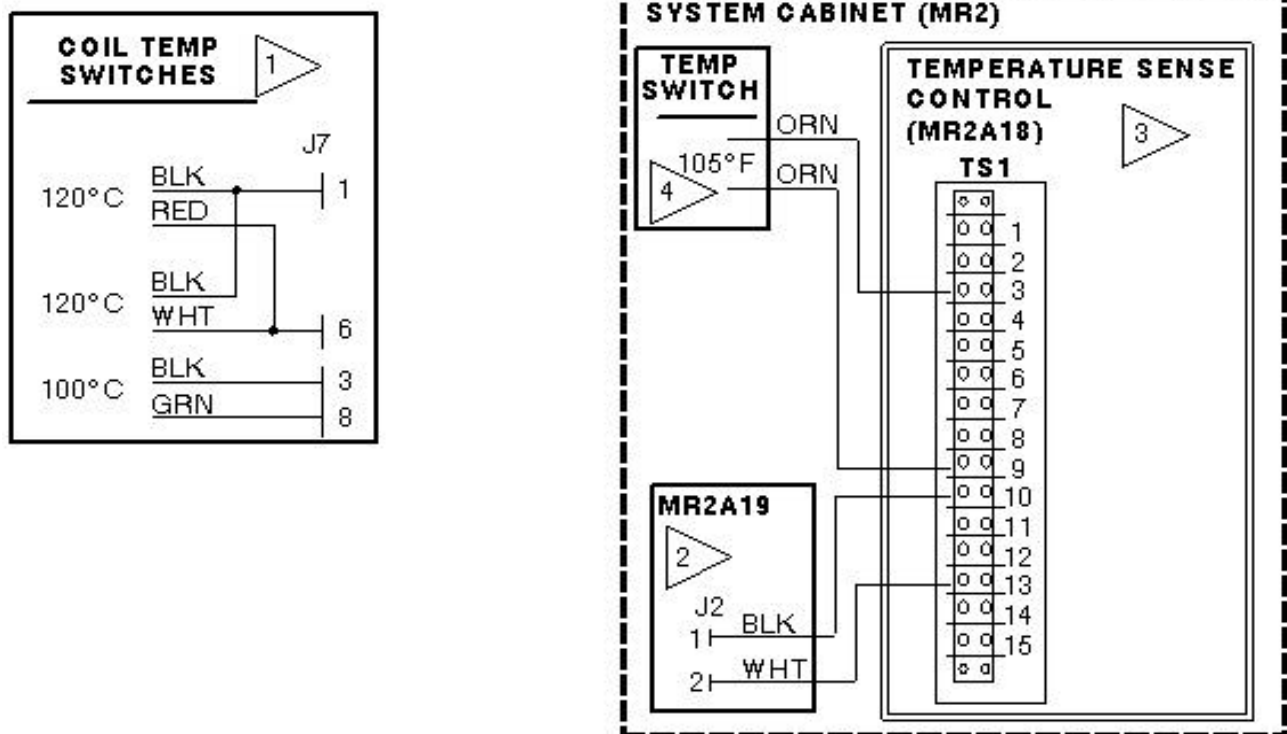


ILLUSTRATION L2744A
COIL AND SYSTEM CABINET TEMPERATURE SWITCHES

Compact PDU Emergency Stop Interconnect, See Illustration L2745B below for Signa Horizon.

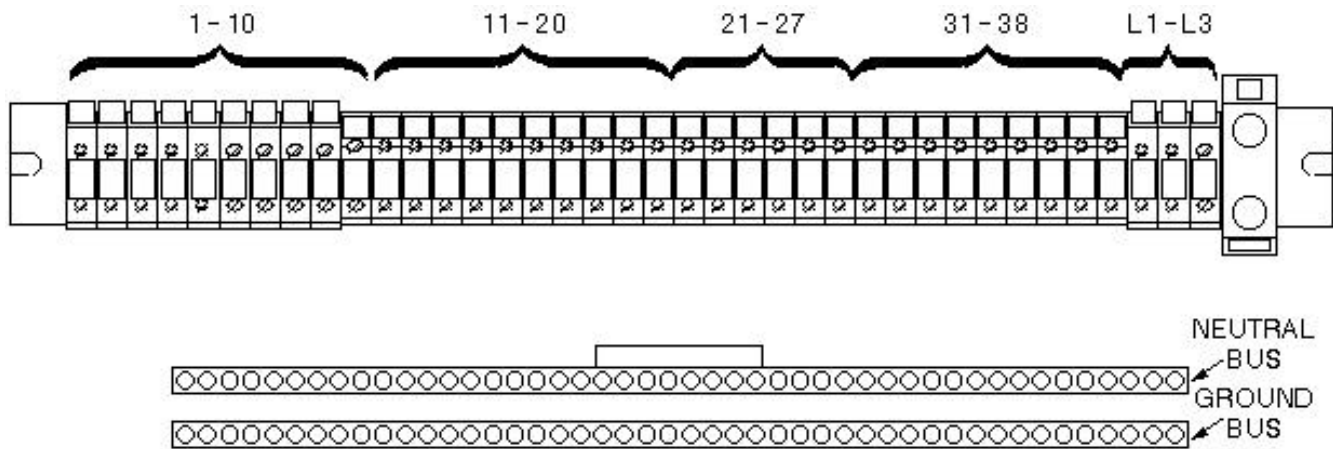


ILLUSTRATION L2745B
TB10 (A2) AND BUS BARS MODELS 46-317099P8 THROUGH P22

2- COMPACT PDU COMPONENT LOCATIONS

The Compact PDU is a single-bay cabinet and the Standard PDU is a two-bay cabinet. Information for the Compact PDU do not apply to the Standard PDU.

See Illustration L2747A below, Front Panel and Load Panel Component Locations.

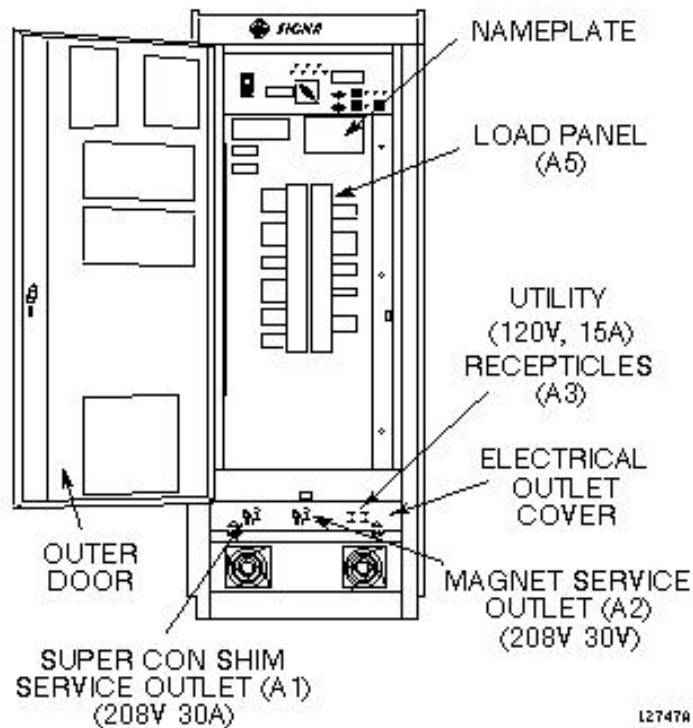


ILLUSTRATION L2747A
FRONT PANEL AND LOAD PANEL COMPONENT LOCATIONS

See Illustration L2722A below, Load Center Bracket Assembly Component Locations.

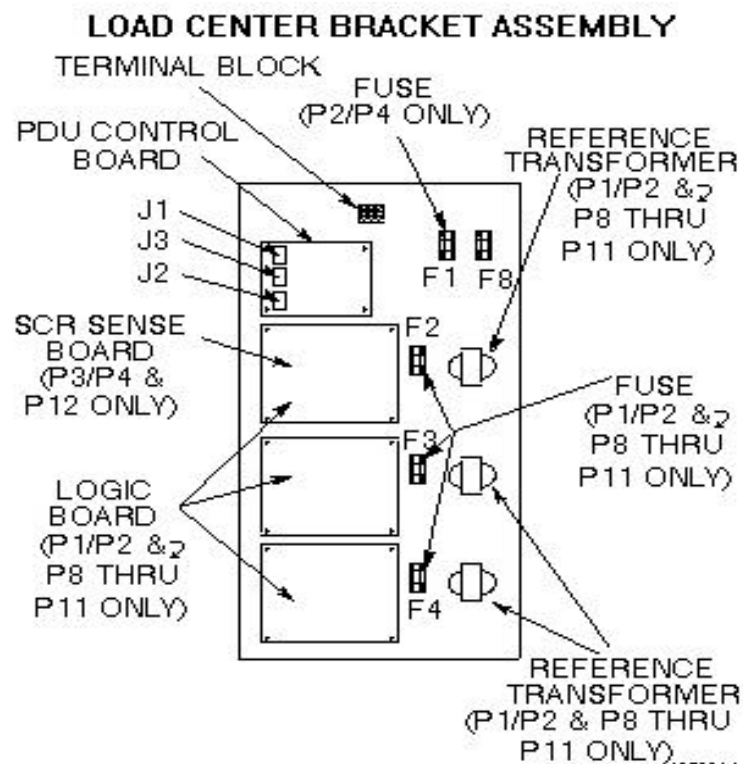


ILLUSTRATION L2722A
LOAD CTR BRACKET ASM COMP.

See Illustration L2750A below, Regulation Panel Component Locations.

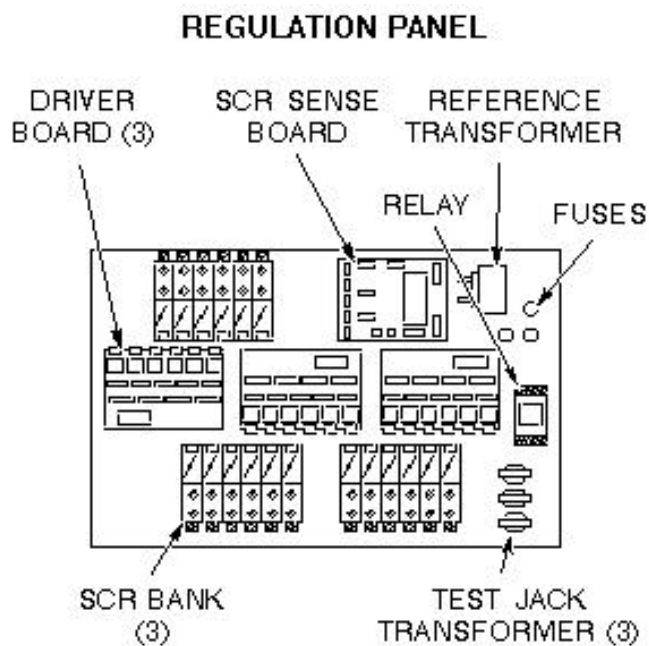


ILLUSTRATION L2750A
REG. PANEL COMP. LOCATIONS

See Illustration L2751A below, Logic Board Component Locations.

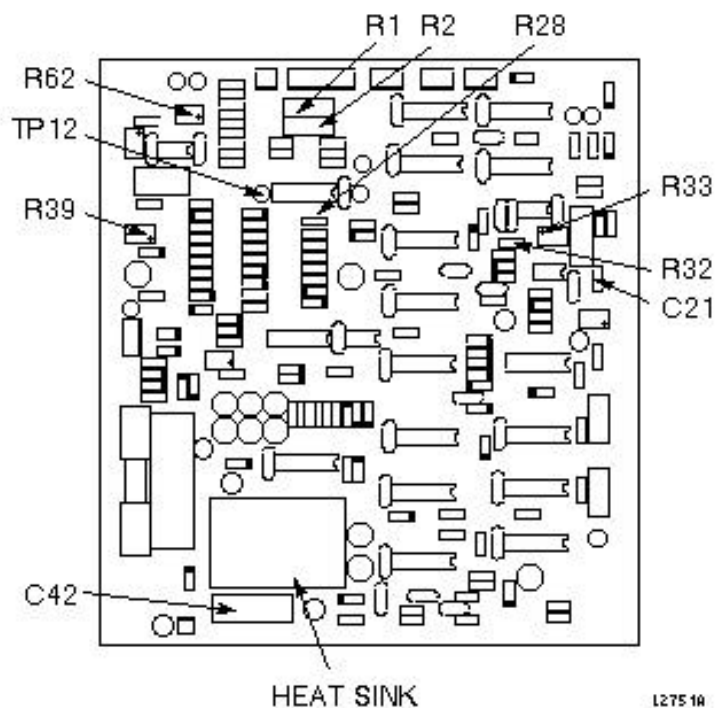


ILLUSTRATION L2751A
LOGIC BD COMPONENT LOCATIONS

See Illustration L2752A below, SCR Bank Component Locations.

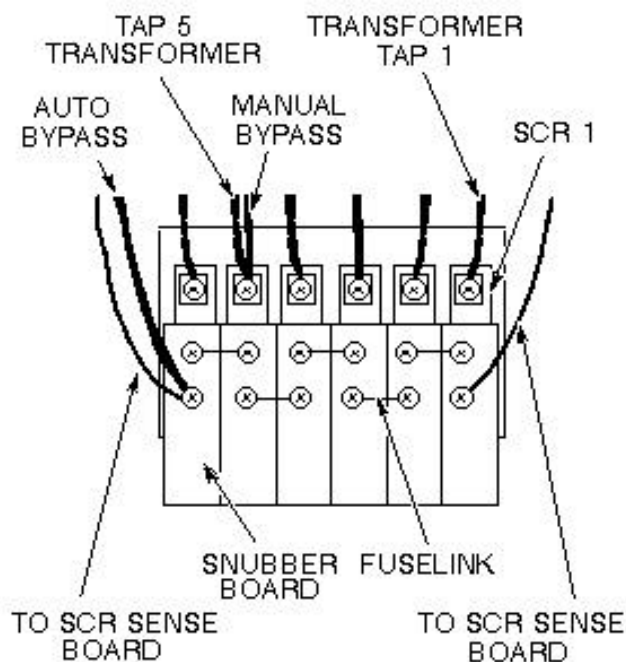


ILLUSTRATION L2752A
SCR BANK COMP. LOCATIONS

See Illustration L2753A below, 60 HZ Filter Component Locations Compact PDU Model 46-317099P1.

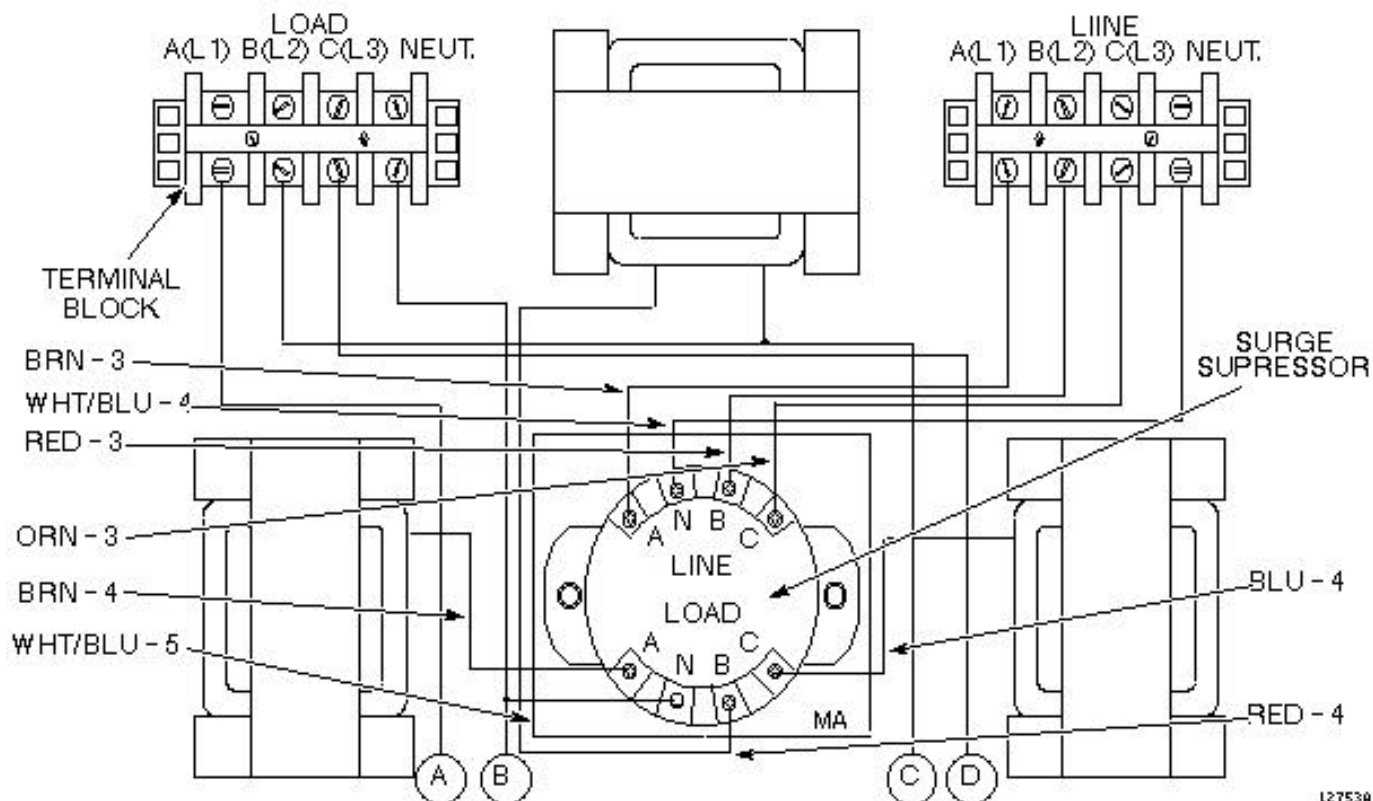


ILLUSTRATION L2753A

L2753A

60 HZ FILTER COMPONENT LOCATIONS (MODEL 46-317099P1)

See Illustration L2755A below, 50 HZ Filter Component Locations Compact PDU Model 46-317099P2.

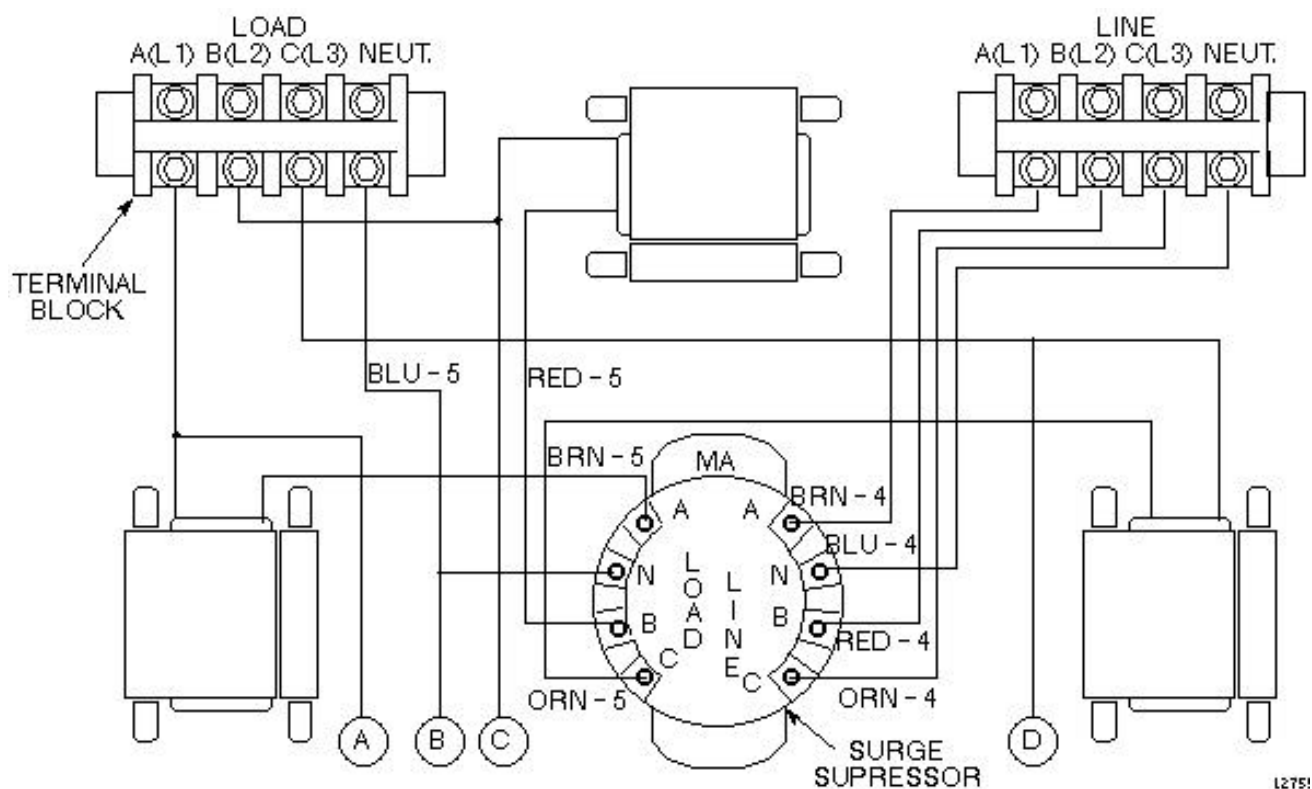


ILLUSTRATION L2755A
50 HZ FILTER COMPONENT LOCATIONS (MODEL 46-317099P2)

See Illustration L4796A below, Filter Component Locations Compact PDU Models 46-317099P8 through P22.

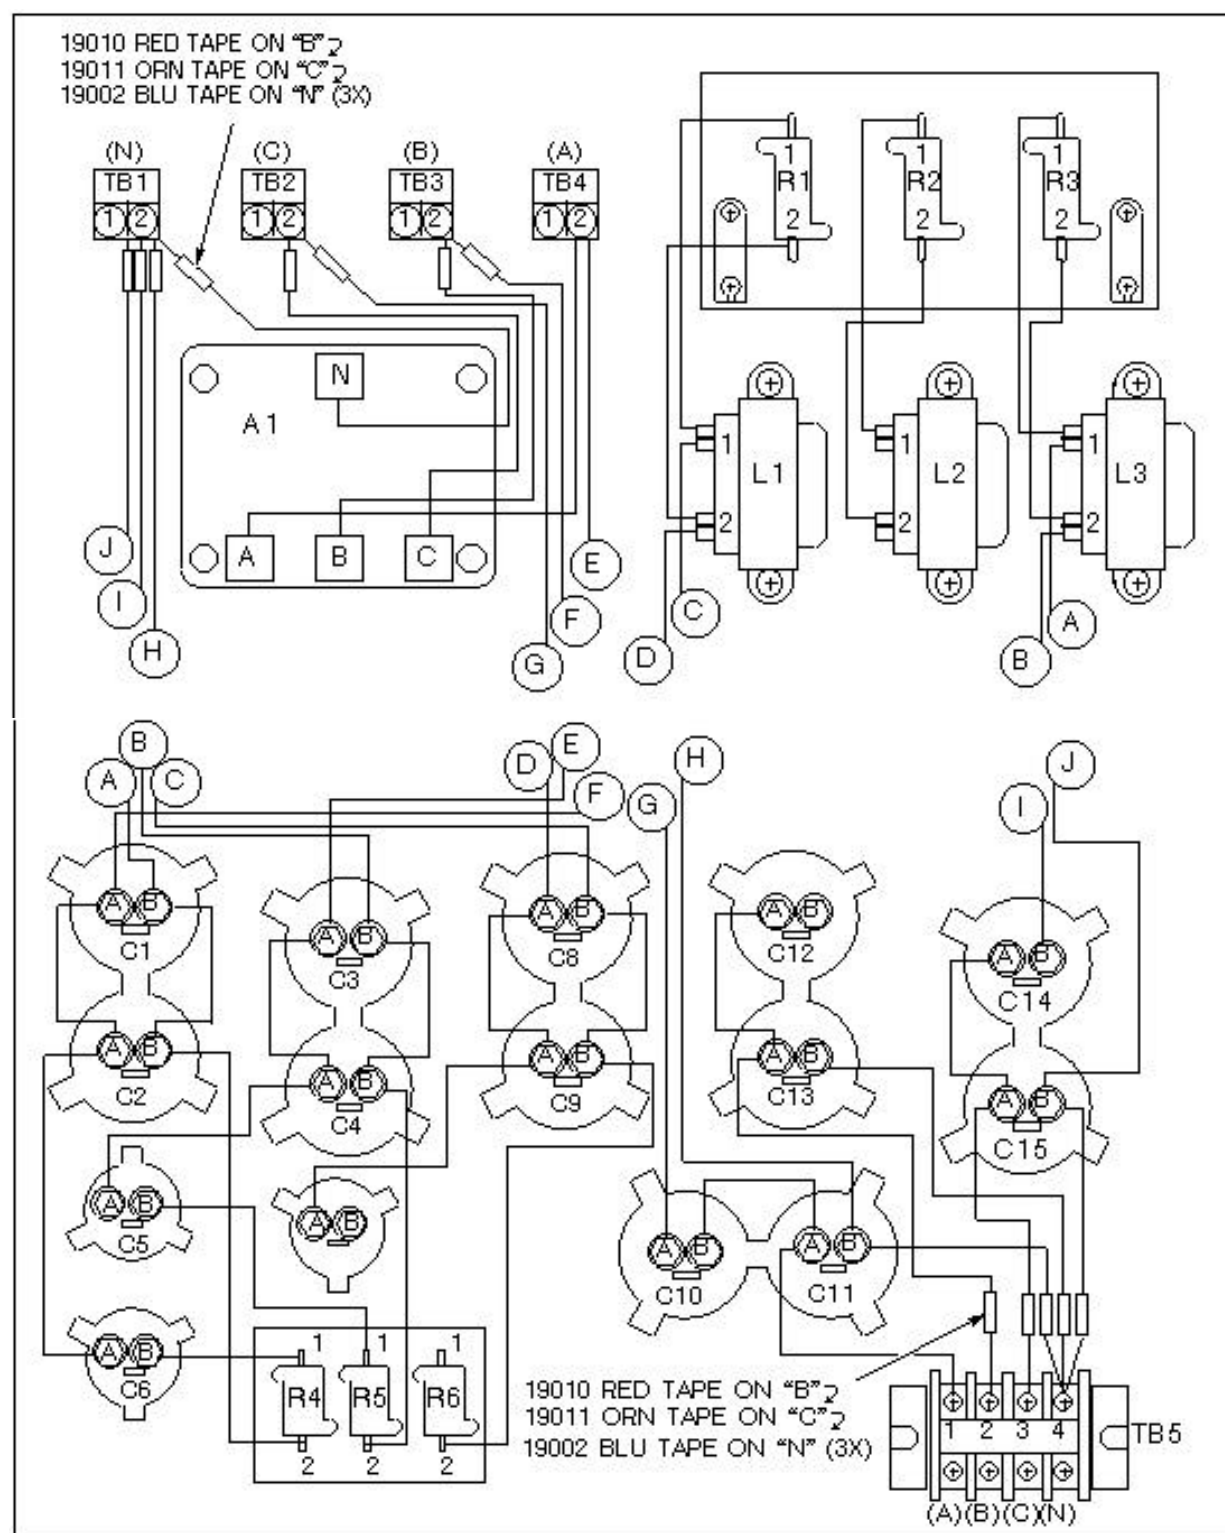


ILLUSTRATION L4796A
FILTER COMP. LOCATIONS COMPACT PDU MODELS 46-317099P8 THROUGH P22

REVISION HISTORY

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
0	June17, 1998	M. Whitlow	Initial Conversion from Toolbook to Word.