

TABLE OF CONTENTS

TABLE OF CONTENTS.....	1
1- OVERVIEW	2
2- REMOVING/INSTALLING BLOWER BOX MOTOR	2
REVISION HISTORY.....	7

1- OVERVIEW

The Blower Box (MG6) contains two blowers; one provides cooling air to the gradient body coil, the other provides cooling air to the patient comfort module. The blowers are AC induction motors, so they do not have brushes; therefore, the entire motor is replaced.


2- REMOVING/INSTALLING BLOWER BOX MOTOR

1. Remove power to Blower Box by doing one of the following:

For the RF/Pen Cabinet: switch circuit breakers MR1A14 CB1 (bore vent fan) and CB2 (gradient fan) on the rear of the MEPS module to the OFF position.

For RF/Pen II and RF/PDU Cabinets: switch circuit breakers MR1A20 CB1 (bore vent fan) and CB2 (gradient fan) on the rear of the SSM to the OFF position.

2. Lock out and tag out circuit breakers. (Refer to CD-ROM *Dir. 2187583-3 [or -2], MR Release Signa 5x/8x Service Methods, Renewal Parts and Service Tools*, Safety, Section 6, OSHA LOCKOUT/TAGOUT REQUIREMENTS.)
3. Verify that power is off by removing the two power plugs at the Blower Box, see Illustration 1-1.
4. Loosen Blower Box Motor Panel Assembly from Blower Box, per Illustration 2-1.

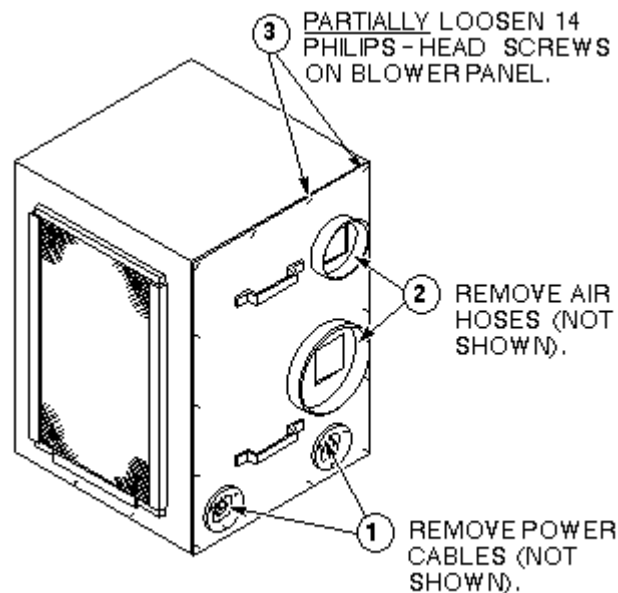

147858


REMOVING BLOWER BOX MOTOR PANEL
ILLUSTRATION 2-1

2- REMOVING/INSTALLING BLOWER BOX MOTOR (continued)



FERROUS MATERIAL HAZARD!! TO PREVENT BODILY INJURY OR MATERIAL DAMAGE, STAY OUTSIDE THE 200 GAUSS LINE WHEN MOVING THE BLOWER ASSEMBLY. ANY FIELD STRENGTH >200 GAUSS WILL FORCIBLY ATTRACT THE MOTOR PANEL ASSEMBLY.


5. Holding Motor Panel Assembly handles, and staying outside 200 gauss line, move Motor Panel Assembly out of scan room.
6. Disconnect wiring from failed motor (see Illustration 2-2).

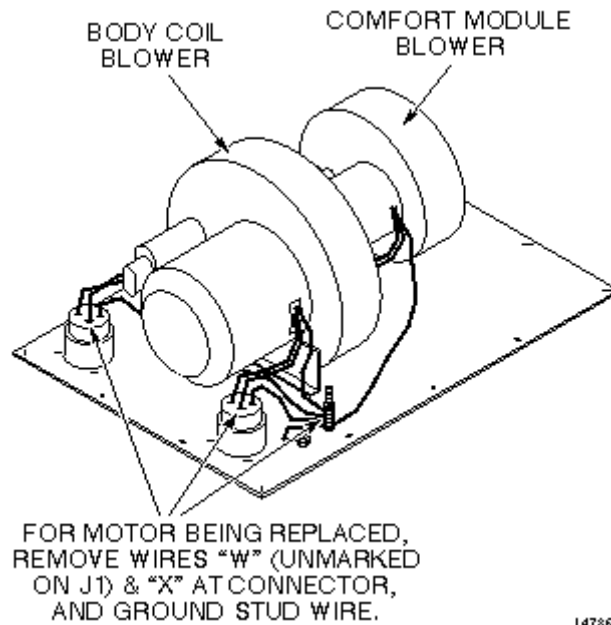

REMOVING BLOWER BOX MOTOR WIRING
ILLUSTRATION 2-2

2- REMOVING/INSTALLING BLOWER BOX MOTOR (continued)


7. Remove failed motor from panel (see Illustration 2-3).
8. Install replacement motor (see Illustration 2-3).

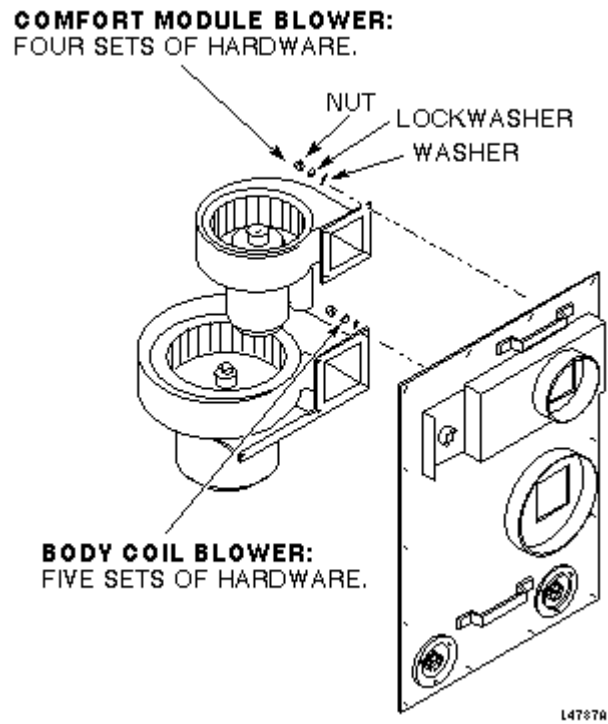

REMOVING/INSTALLING BLOWER MOTOR
ILLUSTRATION 2-3

2- REMOVING/INSTALLING BLOWER BOX MOTOR (continued)

9. Reconnect motor wiring (see Illustration 2-4). Strip 10–13mm (3/8–1/2 in) of insulation off each wire. For HOT and NEU wires, inset wire into connector and tighten set screw. For GN1 or GN2 wires, terminate wire with 6 mm (1/2 in) ring terminal, and connect to ground stud.

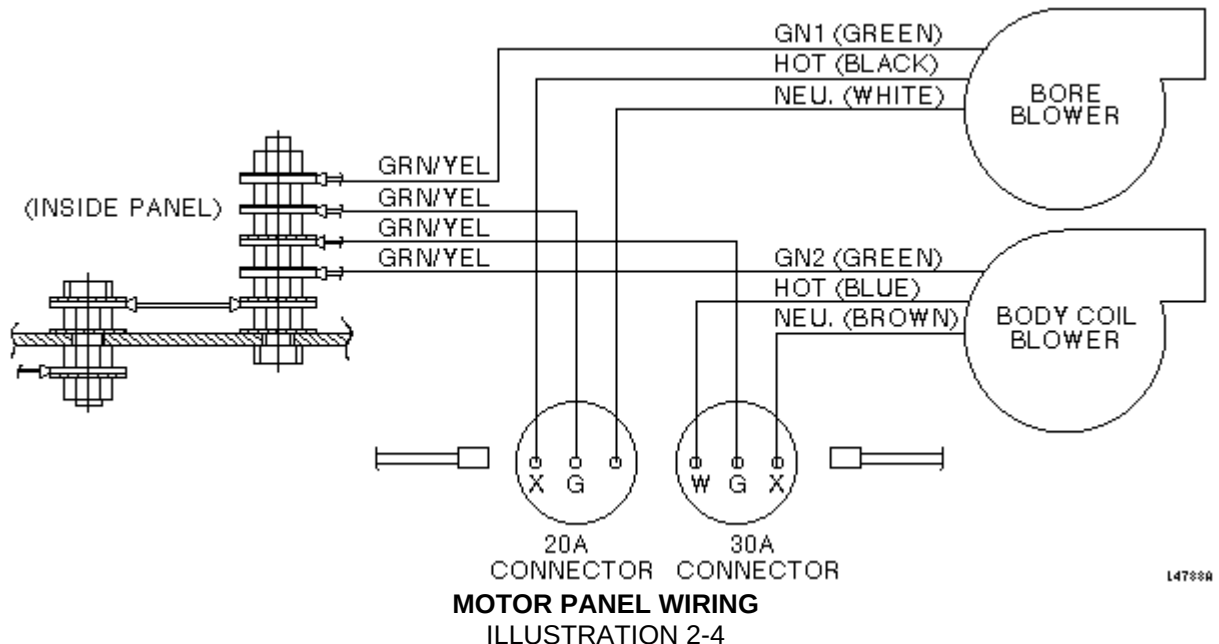


FERROUS MATERIAL HAZARD!! TO PREVENT BODILY INJURY OR MATERIAL DAMAGE, STAY OUTSIDE THE 200 GAUSS LINE WHEN MOVING THE BLOWER ASSEMBLY. ANY FIELD STRENGTH >200 GAUSS WILL FORCIBLY ATTRACT THE MOTOR PANEL ASSEMBLY.

10. Holding Motor Panel Assembly handles and staying outside the 200 gauss line, move Motor Panel Assembly into scan room.

2- REMOVING/INSTALLING BLOWER BOX MOTOR (continued)

11. Reinstall Motor Panel Assembly, and power cables; wait to install hoses until after blower check (see Illustration 2-5).

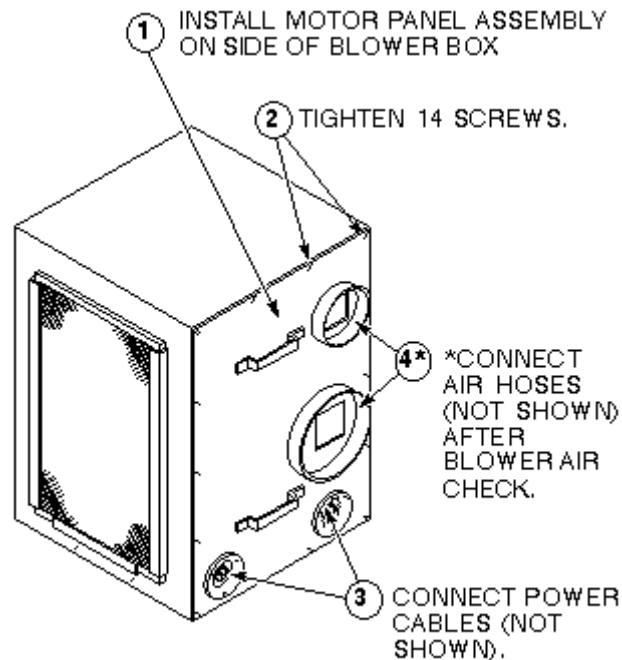

INSTALLING MOTOR PANEL
ILLUSTRATION 2-5

12. Remove tag-out tag from circuit breaker MR1A14 CB1 & CB2 at rear of RF/Pen Cabinet on the rear of the MEPS module.

For RF/Pen II and RF/PDU Cabinets, remove lock out and tag-out tag from circuit breakers MR1A20 CB1 (bore vent fan) and CB2 (gradient fan) on the rear of the SSM.

13. Switch circuit breakers MR1A14 CB1 & CB2 to the ON position.

For RF/Pen II and RF/PDU Cabinets, switch circuit breakers MR1A20 CB1 (bore vent fan) and CB2 (gradient fan) on the rear of the SSM to the ON position.

14. Verify that both blowers are operating and blowing air out of Blower Box.

15. Switch circuit breakers MR1A14 CB1 & CB2 to the OFF position.

For RF/Pen II and RF/PDU Cabinets, switch circuit breakers MR1A20 CB1 (bore vent fan) and CB2 (gradient fan) on the rear of the SSM to the OFF position.

16. Reinstall Blower Box hoses (see Illustration 2-5).

17. Switch circuit breakers MR1A14 CB1 & CB2 to the ON position.

For RF/Pen II and RF/PDU Cabinets, switch circuit breakers MR1A20 CB1 (bore vent fan) and CB2 (gradient fan) on the SSM to the ON position.

REVISION HISTORY

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
A	April 27, 1998	W. Pasciak	Initial release converted to Word
0	May 11, 1998	wek	Update lock out/tag out copy
1	January 26, 1999	K. Keshena	Added information for the RF/PDU Cabinet.